


PARTS LIST

AKAI AMPLIFIER

MODEL **AA-8500**

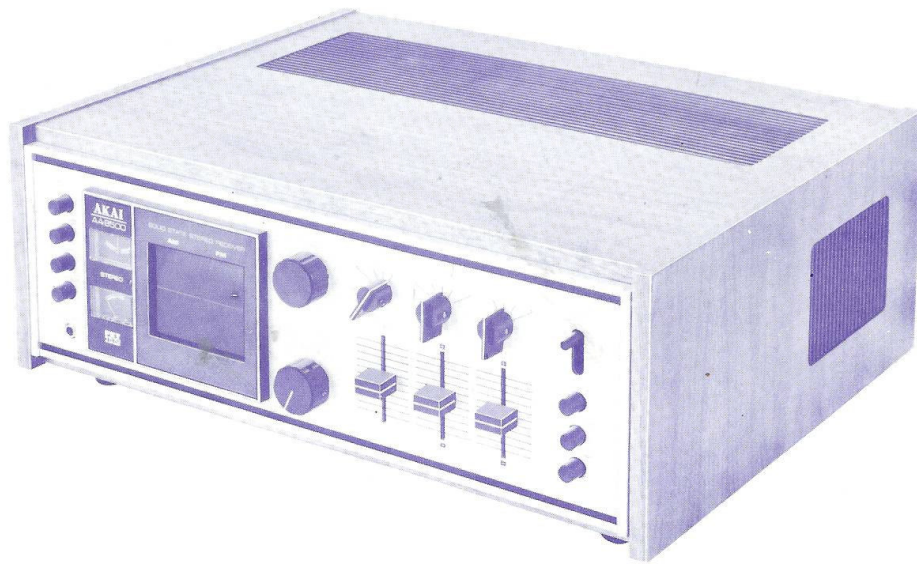


WHEN YOU ORDER THESE PARTS
PLEASE DESCRIBE THEIR PARTS NO.
AND SERIAL NO. IN DETAIL

TABLE OF CONTENTS

FILTER P.C. BOARD BLOCK	3
MPX. P.C. BOARD BLOCK	4
AM-IF P.C. BOARD BLOCK	6
FM. IF. P.C. BOARD BLOCK	7
MAIN AMPLIFIER P.C. BOARD BLOCK	8
PRE-AMPLIFIER P.C. BOARD BLOCK	9
EQUALIZER AMP. P.C. BOARD BLOCK	10
POWER SOURCE P.C. BOARD BLOCK	11
ASSEMBLY BLOCK	12

NOTE: *mark shows more than 10 pieces.


FILTER P.C. BOARD BLOCK

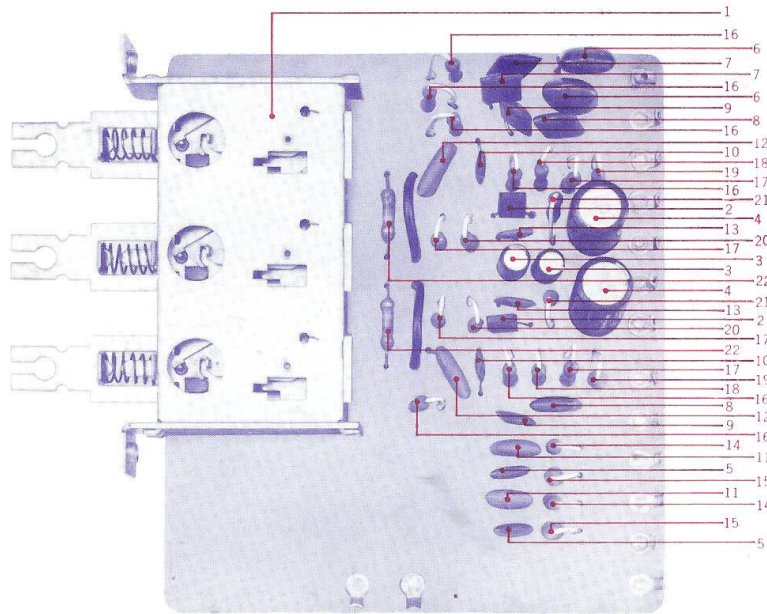

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	A-381172	Filter P.C. Board Assy. Comp.	AA-5532	1
1	A-379260	Push Switch Um-318-20	25-5-30	1
2	A-368021	Transistor 2SC458 (B) (C)	TR-301	2
Capacitor, Vertical Type c				
3	A-450055	Electrolytic 1 μ F 25 WV	310	2
4	A-220678	Electrolytic 47 μ F 25 WV	311	2
5	A-379157	Mylar 0.033 μ F (J) 50 WV	301	2
6	A-379170	Mylar 0.1 μ F (J) 50 WV	303	2
7	A-379192	Mylar 0.039 μ F (J) 50 WV	304	2
8	A-250841	Mylar 0.01 μ F (J) 50 WV	305	2
9	A-379214	Mylar 0.047 μ F (J) 50 WV	306	2
10	A-250683	Mylar 0.0022 μ F (J) 50 WV	307	2
11	A-337476	HI-Q 100PF (K) 50 WV	302	2
12	A-379236	HI-Q 680PF (J) 50 WV	308	2
13	A-397247	HI-Q Z-12 25P (J) 50 WV	309	2
Carbon Resistor, Stopper Type				
14	A-450011	RD 1/4 120K J	R 301	2
15	A-211858	RD 1/4 12K J	302	2
16	A-379078	RD 1/4 1.5M K	303, 4 13, 14	8
17	A-336442	RD 1/4 10K J	306, 11	4
18	A-342933	RD 1/4 27K J	307	2
19	A-350021	RD 1/4 820K K	308, 9	4
20	A-346645	RD 1/4 680K K	310	2
21	A-379113	RD 1/4 1.1K J	312	2
22	A-378696	RD 1/4 51K J (Insulator)	305	2

When you order these parts, Please describe their Parts No. and Serial No. in detail

MPX. P.C. BOARD BLOCK

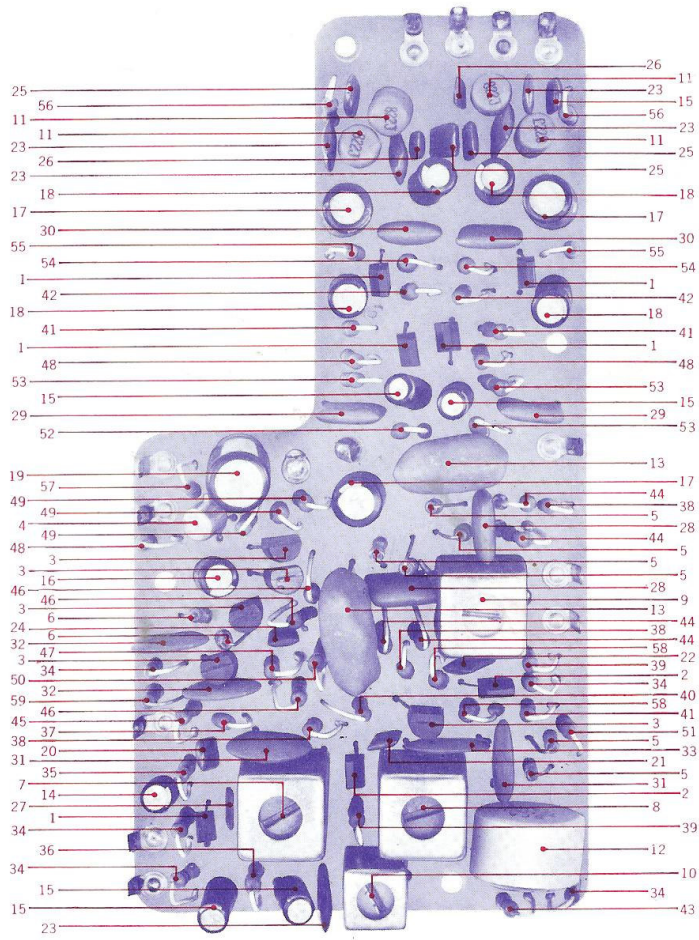


MPX P.C. BOARD BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	B-381194	MPX. P.C. Board Assy. Comp. (U,A,O)	AA-5536	1	42	B-379517	RD 1/4 62K J	611.37.38	3
-	B-381205	MPX. P.C. Board Assy. Comp. (J)	AA-5536	1	43	B-371946	RD 1/4 2K J	614	1
1	B-234843	Transistor 2SC458LG (B) (C)	TR601.10 to 13	5	44	B-349828	RD 1/4 20K J	615 to 18	4
2	B-368021	Transistor 2SC458 (B) (C)	TR602.3	2	45	B-361528	RD 1/4 56K J	621	1
3	B-379462	Transistor 2SC711 (D) (E)	TR604.5 6, 7, 9	5	46	B-379552	RD 1/4 110K J	622.25.26	3
4	B-338894	Transistor 2SC968(3)	TR608	1	47	B-379596	RD 1/4 16K J	624	1
5	B-379855	Germanium Diode 1N60P	D601 to 6	6	48	B-357456	RD 1/4 2.2K J	627.39.40	3
6	B-219464	Germanium Diode 1N34A	D607.8	2	49	B-211667	RD 1/4 100Ω J	628.50 51.54	4
7	B-379866	Transformer (19K Hz) 06Y-033-681	T601	1	50	B-357535	RD 1/4 39K J	629	1
8	B-379877	Transformer (19K Hz) 06Y-033-695	T602	1	51	B-379631	RD 1/4 300K J	630	1
9	B-379890	Transformer (38K Hz) 06Y-033-683	T603	1	52	B-379675	RD 1/4 51K J	633.34	2
10	B-379888	Transformer (19K Hz) 06Y-067-151	T604	1	53	B-357570	RD 1/4 150K J	635.36	2
11	B-379923	Ferri-Inductor FL7H 8.2MH (J)	L601 to 4	4	54	B-306887	RD 1/4 15K J	643.44	2
12	B-379901	Filter (72K Hz) FL-1371	FLT601	1	55	B-211320	RD 1/4 1.5K J	645.646	2
13	B-379912	Filter (38K Hz) FP-38A	FLT602.3	2	56	B-211465	RD 1/4 1K J	647.48	2
		Capacitor, Vertical Type C			57	B-347073	RD 1/4 200Ω J	649	1
14	B-450055	Electrolytic 1 μF 25 WV	601	1	58	B-350188	RD 1/4 1M J	652	1
15	B-320051	Electrolytic 10 μF 16 WV	602.3 19.20	4	59	B-212545	RD 1/4 3.6K J	653	1
16	B-350695	Electrolytic 22 μF 25 WV	618	1					
17	B-220105	Electrolytic 100 μF 10 WV	623.24.39	3					
18	B-220994	Electrolytic 10 μF 25 WV	625 to 28	4					
19	B-220678	Electrolytic 47 μF 25 WV	641	1					
20	B-329883	Mylar 0.0056 μF (J) 50 WV	605	1					
21	B-337500	Mylar 0.0047 μF (J) 50 WV	607	1					
22	B-379721	Mylar 0.0012 μF (J) 50 WV	609	1					
23	B-250841	Mylar 0.01 uF (J) 50 WV	610.31 32.35.36	5					
24	B-379800	Mylar 0.0068 μF (M) 50 WV	616	1					
25	B-379765	Mylar 0.0027 μF (J) 50 WV	629.30 37.38	4					
26	B-379787	Mylar 0.0039 μF (J) 50 WV	633.34	2					
27	B-379271	HI-Q Z-12 50P (K) 50 WV	604	1					
28	B-450606	HI-Q 470PF (K) 50 WV	611.12	2					
29	B-349301	HI-Q 390PF (J) 50 WV	613.14	2					
-	B-310792	VFM 120PF (J) 50 WV	613.14	2					
30	B-332280	HI-Q 330PF (K) 50 WV	621.22	2					
31	B-393930	Ceramic UFD13R 0.015 μM 25 WV	606.8	2					
32	B-379743	Ceramic TLD14F 0.047 μZ 25 WV	615.17	2					
33	B-404346	Ceramic TLD14F 0.1 μZ 25 WV	640	1					
		Carbon Resistor, Stopper Type	R						
34	B-336442	RD 1/4 10 K J	610.2.10 13.23	5					
35	B-379473	RD 1/4 30K J	603	1					
36	B-213096	RD 1/4 510Ω J	604	1					
37	B-349907	RD 1/4 33K J	605	1					
38	B-357570	RD 1/4 150K J	606.19.20	3					
39	B-213300	RD 1/4 680Ω J	607.12	2					
40	B-212264	RD 1/4 22K J	608	1					
41	B-211858	RD 1/4 12K J	609.41.42	3					

When you order these parts, Please describe their Parts No. and Serial No. in detail


AM-IF P.C. BOARD BLOCK

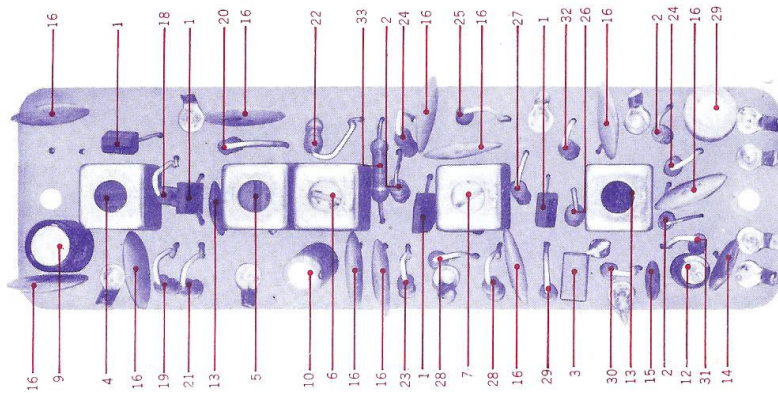

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	C-381216	AM-IF P.C. Board Assy. Comp. (J,U,A)	AA-5537	1	27	C-212310	RD 1/4 22K K	913	1
-	C-381227	AM-IF P.C. Board Assy. Comp. (O)	AA-5537	1	28	C-211072	RD 1/4 3.3K K	914,15	2
1	C-345802	Transistor 2SC454 (B)	TR901 to 4	4	29	C-211116	RD 1/4 330Ω K	916	1
2	C-219464	Germanium Diode 1N34A	D901,2,3	3	30	C-211094	RD 1/4 3.9K K	918	1
3	C-380406	Filter BFB 455B-5 (J,U,A)	FLT901	1	31	C-211138	RD 1/4 470Ω K	919	1
-	C-380417	Filter BFB 464-A (O)	FLT901	1	32	C-379934	RD 1/4 27Ω J	920	1
4	C-379978	RF Coil YXR 18887 KO	T901	1	33	C-214593	RD 1/4 68K K (Insulator)	908	1
5	C-379980	Oscillator Coil YXR 18888 MG	T902	1					
6	C-379991	Transformer (455K Hz) HI-137S	T903	1					
7	C-380384	Transformer (455K Hz) HI-134S	T904	1					
8	C-380395	Transformer (455K Hz) 168-D	T905	1					
		Capacitor, Vertical Type C							
9	C-450066	Electrolytic 33 μF 16 WV	903	1					
10	C-307664	Electrolytic 33 μF 6.3 WV	908	1					
11	C-220364	Electrolytic 100 μF 6.3 WV	916	1					
12	C-220432	Electrolytic 2.2 μF 25 WV	917	1					
13	C-379833	Mylar 0.0082 μF (K) 50 WV	905	1					
14	C-251087	Mylar 0.022 μF (K) 50 WV	915	1					
15	C-250885	Mylar 0.01 μF (K) 50 WV	918	1					
16	C-379822	Ceramic DB-207 0.047 μF (Z) 50 WV	901,2,4,6 7,9 to 14	10					
		Carbon Resistor, Stopper Type	R						
17	C-212354	RD 1/4 220Ω K	901	1					
18	C-211590	RD 1/4 10K K	903	1					
19	C-210925	RD 1/4 1.5K K	904	1					
20	C-357614	RD 1/4 120Ω K	905	1					
21	C-211408	RD 1/4 1.8K K	906	1					
22	C-212455	RD 1/4 270Ω K	907	1					
23	C-382116	RD 1/4 1Ω K	909	1					
24	C-212220	RD 1/4 2.2 K K	910,17	2					
25	C-320973	RD 1/4 47Ω K	911	1					
26	C-211577	RD 1/4 10Ω K	912	1					

When you order these parts, Please describe their Parts No. and Serial No. in detail


FM. IF. P.C. BOARD BLOCK

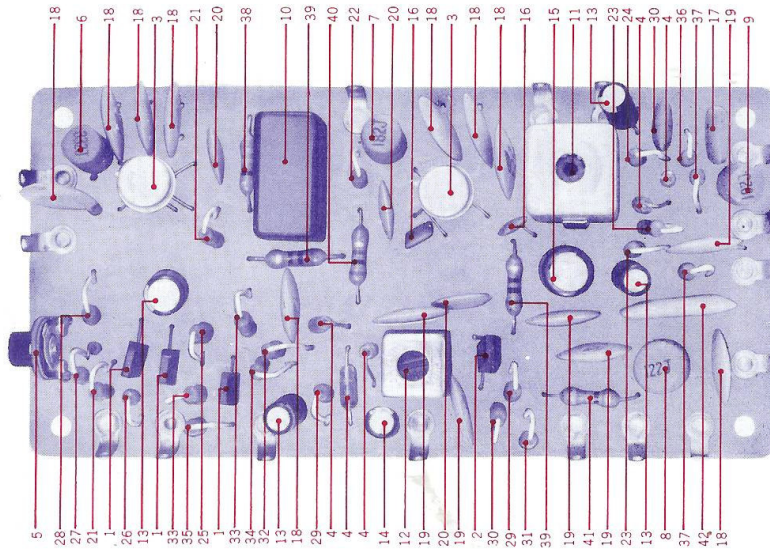

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
—	D-381238	FM. IF. P.C. Board Assy. Comp.	AA-5538	1					
1	D-234753	Transistor 2SC458 (B)	TR801.2.4	3	21	D-211116	Carbon Resistor, Stopper Type	R	
2	D-380430	Transistor 2SC460 (C)	TR803	1	22	D-212646	RD 1/4 330 Ω K	801.10	2
3	D-380441	I.C. TA7037M	IC801.2	2	23	D-210958	RD 1/4 33 Ω K	803	1
4	D-379855	Germanium Diode 1N60P	D801 to 5	5	24	D-212354	RD 1/4 1K K	807.8	2
5	D-335046	Semi-variable Resistor V101KRZ 50KB	VR801	1	25	D-213153	RD 1/4 220 Ω K	809	1
6	D-243988	Ferri-Inductor FL7H 3.3 MH (J)	L.801	1	26	D-336464	RD 1/4 56K K	811	1
7	D-380564	Ferri-Inductor FL7H 1.8 MH (J)	L.802	1	27	D-211983	RD 1/4 56 Ω K	812	1
8	D-380575	Ferri-Inductor FL9H 1.2 MH (J)	L.803	1	28	D-211590	RD 1/4 15K K	813	1
9	D-243977	Ferri-Inductor FL7H 1.0 MH (J)	L.804	1	29	D-212117	RD 1/4 10K K	814	1
10	D-380520	Filter CFP-10.7 MA	FLT801	1	30	D-213186	RD 1/4 18K K	815.17	2
11	D-380531	IFT (F. discriminator) V4FCC 2836BDR 10.7 MHZ	T801	1	31	D-211072	RD 1/4 560 Ω K	816	1
12	D-380542	IFT HMS-531 10.7 MHZ	T802	1	32	D-211781	RD 1/4 3.3K K	818	1
		Capacitor, Vertical Type C			33	D-212940	RD 1/4 100K K	819	1
13	D-320051	Electrolytic 10 μF 16 WV	815.17	4	34	D-212940	RD 1/4 47K K	820.23	2
14	D-220432	Electrolytic 2.2 μF 25 WV	20.27	1	35	D-212433	RD 1/4 27K K	821	1
15	D-320040	Electrolytic 47 μF 16 WV	819	1	36	D-210971	RD 1/4 100 Ω K	822	1
16	D-380507	HI-Q 1 PF (J) 50 WV	826	1	37	D-213243	RD 1/4 6.8K K	824	1
17	D-329848	HI-Q 100 PF (J) 50 WV	811.12	2	38	D-213006	RD 1/4 470K K	825.26	2
18	D-379822	Ceramic DB-207 0.047 μF (Z) 50 WV	816.28	2	39	D-380452	RD 1/4 33 Ω K (Insulator)	802	1
19	D-379822	Ceramic DB-207 0.047 μF (Z) 50 WV	801 to 4.8	9	40	D-364465	RD 1/4 10 Ω K (Insulator)	804.5	2
20	D-380496	Ceramic DB-205 0.015 μF (Z) 50WV	9.10.14	3	41	D-213682	RD 1/4 100 Ω K (Insulator)	806	1
			18		42	D-214345	RD 1/4 47 Ω K (Insulator)	827	1
			29						
			805.6.7						

When you order these parts, Please describe their Parts No. and Serial No. in detail


MAIN AMPLIFIER P.C. BOARD BLOCK

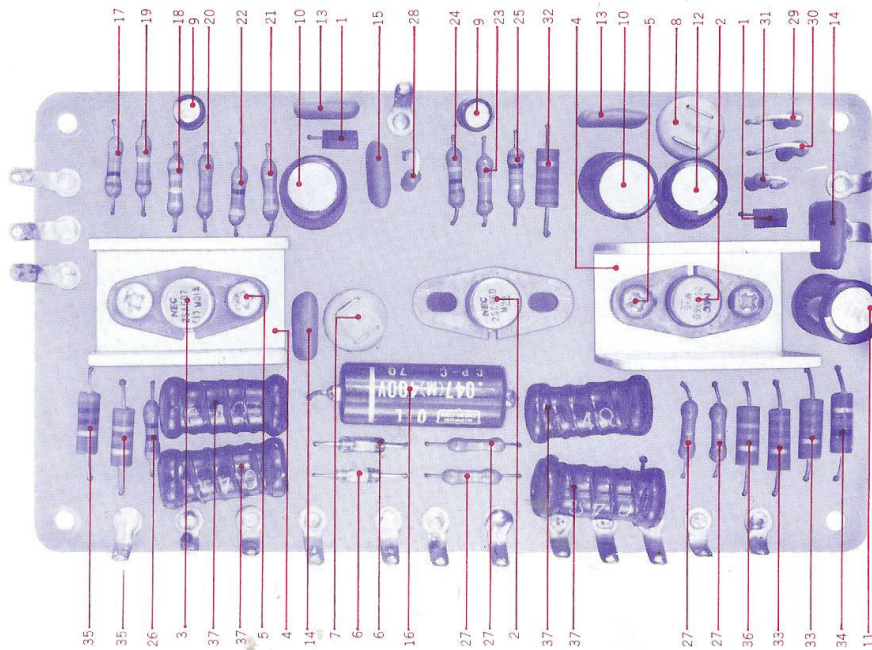

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
—	E-380992	Main Amp. P.C. Board Assy. Comp.	AA-5539	2	20	E-324718	RD 1/4 5.6K J	204	2
1	E-234753	Transistor 2SC458 (B)	TR201.3	4	21	E-380070	RD 1/4 4.3K J	205	2
2	E-380002	Transistor 2SC960 (L) or (M)	TR202.4	4	22	E-450347	RD 1/4 47 Ω J	206	2
3	E-380024	Transistor 2SA607 (L) or (M)	TR205	2	23	E-348478	RD 1/4 12K J	207	2
4	E-378178	Heat Sink Plate B	AA-5542	4	24	E-213704	RD 1/4 100K J	209	2
5	E-380046	ISO Screw, pan head 3 x 10		8	25	E-213636	RD 1/4 10K J	217	2
—	E-348107	M3 ISO Nut		8	26	E-380136	RD 1/4 10 Ω J	221	2
6	E-219464	Germanium Diode 1N34A	B201.2	4	27	E-382127	RD 1/4 2.7 Ω J	222, 23 26, 27	8
7	E-380204	Semi-variable Resistor SV10KR 1KB	VR201	2	28	E-343135	RD 1/4 1.6K J (w/stopper)	208	2
8	E-380215	Semi-variable Resistor SV10KR 100KB	VR202	2	29	E-212477	RD 1/4 3.3K J (w/stopper)	210	2
		Capacitor, Vertical Type C			30	E-362441	RD 1/4 1.8K J (w/stopper)	211	2
9	E-450055	Electrolytic 1 μF 25 WV	201.4	4	31	E-211320	RD 1/4 1.5K J (w/stopper)	212	2
10	E-321208	Electrolytic 220 μF 16 WV	203.7	4			Solid Resistor	R	
11	E-346735	Electrolytic 47 μF 50 WV	205	2	32	E-353700	RC 1/2 120 Ω K	213	2
12	E-370631	Electrolytic 33 μF 50 WV	208	2	33	E-380114	RC 1/2 8.2K K	214, 5	4
—	E-450213	Electrolytic 10 μF 50 WV	214	2	34	E-380125	RC 1/2 1K K	216	2
13	E-329826	HI-Q 220 PF (K) 50 WV	202.6	4	35	E-803237	RC 1/2 270 Ω K	218, 20	4
14	E-394020	HI-Q 560 PF (K) 50 WV	209, 10	4	36	E-332212	RC 1/2 10 Ω K	219	2
15	E-450606	HI-Q 470 PF (K) 50 WV	212, 13	4	37	E-380171	Wire-wound 1.5WL 2.7 Ω J	224, 25 28, 29	8
16	E-210273	Oil Tubular 0.05 μF (M) 400 WV	211	2					
		Carbon Resistor, Insulator Type	R						
17	E-324630	RD 1/4 1K J	201	2					
18	E-450090	RD 1/4 330 K J	202	2					
19	E-213783	RD 1/4 120K J	203	2					

When you order these parts, Please describe their Parts No. and Serial No. in detail


PRE-AMPLIFIER P.C. BOARD BLOCK

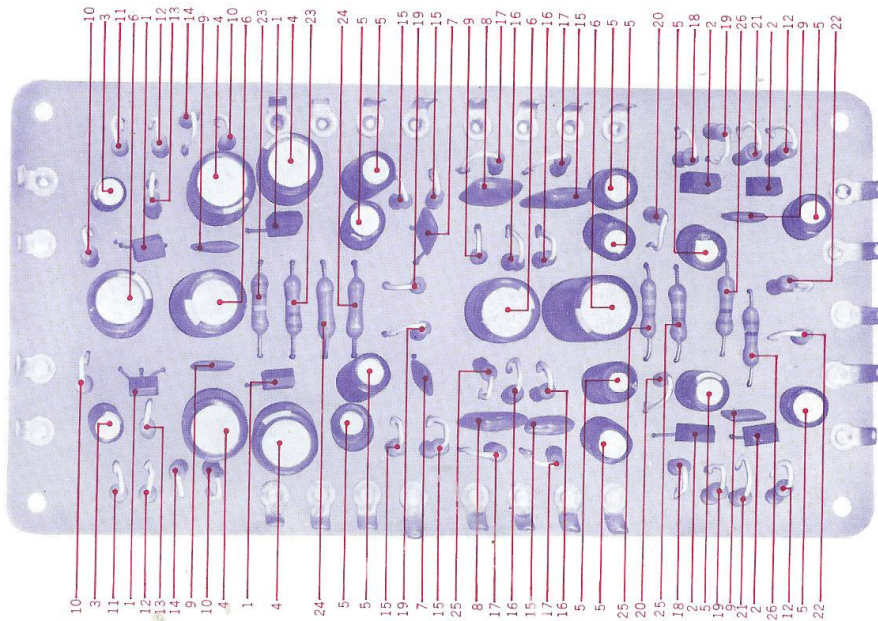

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
—	F-381003	Pre-Amp. P.C. Board Assy. Comp.	AA-5545	1					
1	F-234843	Transistor 2SC458LG (B) (C)	TR401.2	4					
2	F-368021	Transistor 2SC458 (B) (C)	TR403.4	4					
		Capacitor, Vertical Type c					Carbon Resistor, Insulator Type	R	
3	F-450281	Electrolytic 0.47 μ F 50 WV	401	2	23	F-380226	RD 1/4 110K J	406	2
4	F-324516	Electrolytic 220 μ F 6.3 WV	402.3	4	24	F-380261	RD 1/4 6.2K J	407	2
5	F-220994	Electrolytic 10 μ F 25 WV	404, 6.10 12, 13, 16	12	25	F-380654	RD 1/4 51K J	419	2
6	F-220151	Electrolytic 100 μ F 25 WV	414, 15	4	26	F-324630	RD 1/4 1K J	422	2
7	F-250683	Mylar 0.0022 μ F (J) 50 WV	407	2					
8	F-380608	Mylar 0.047 μ F (J) 50 WV	408, 9	4					
9	F-380698	HI-Q 250 PF (K) 50 WV Z-12	405, 11	4					
		Carbon Resistor, Stopper Type	R						
10	F-211465	RD 1/4 1K J	401, 6	4					
11	F-362272	RD 1/4 200K J	402	2					
12	F-361607	RD 1/4 300 Ω J	403, 20	4					
13	F-324202	RD 1/4 5.1K J	404	2					
14	F-211320	RD 1/4 1.5K J	408	2					
15	F-306360	RD 1/4 6.8K J	409, 10	4					
16	F-336442	RD 1/4 10K J	411, 12, 13	6					
17	F-380305	RD 1/4 110K J	414, 15	4					
18	F-211757	RD 1/4 100K J	416	2					
19	F-213096	RD 1/4 510 Ω J	417, 23	4					
20	F-380340	RD 1/4 51K J	418	2					
21	F-212872	RD 1/4 4.3K J	421	2					
22	F-211667	RD 1/4 100 Ω J	424	2					

When you order these parts, Please describe their Parts No. and Serial No. in detail


EQUALIZER AMP. P.C. BOARD BLOCK

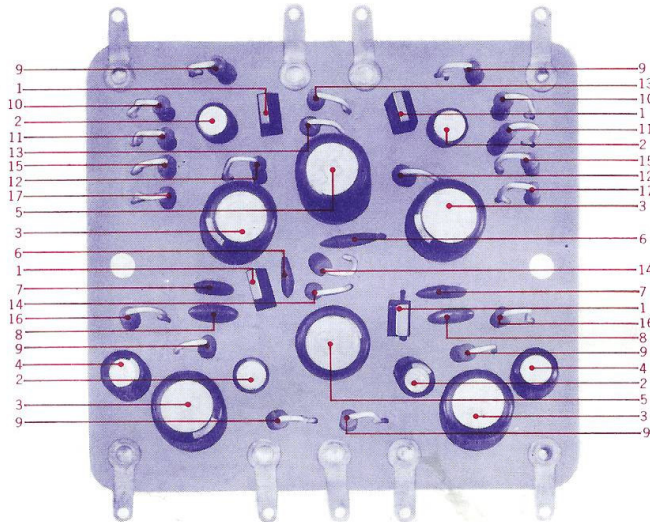

Ref. No.	Parts No.	Description	Schematic No.	Quantity
—	G-381240	Equalizer Amp. P.C. Board Assy. Comp.	AA-5546	1
1	G-234843	Transistor 2SC458LG (B) (C)	TR501.2	4
Capacitor, Vertical Type C				
2	G-450281	Electrolytic 0.47 μ F 50 WV	501.5	4
3	G-324516	Electrolytic 220 μ F 6.3 WV	502.3	4
4	G-220994	Electrolytic 10 μ F 25 WV	506	2
5	G-220151	Electrolytic 100 μ F 25 WV	507	2
6	G-380698	HI-Q Z-12 25PF (K) 50 WV	504	2
7	G-380621	Mylar 0.0068 μ F (J) 50 WV	508	2
8	G-368335	Mylar 0.022 μ F (J) 50 WV	509	2
Carbon Resistor, Stopper Type				
9	G-211465	RD 1/4 1K J	501.6.8	6
10	G-362272	RD 1/4 200K J	502	2
11	G-361607	RD 1/4 300 Ω J	503	2
12	G-212872	RD 1/4 4.3K J	504	2
13	G-380305	RD 1/4 110K J	505	2
14	G-380755	RD 1/4 6.2K J	507	2
15	G-213096	RD 1/4 510 Ω J	509	2
16	G-380711	RD 1/4 220K J	510	2
17	G-211858	RD 1/4 12K J	511	2

When you order these parts, Please describe their Parts No. and Serial No. in detail



POWER SOURCE P.C. BOARD BLOCK

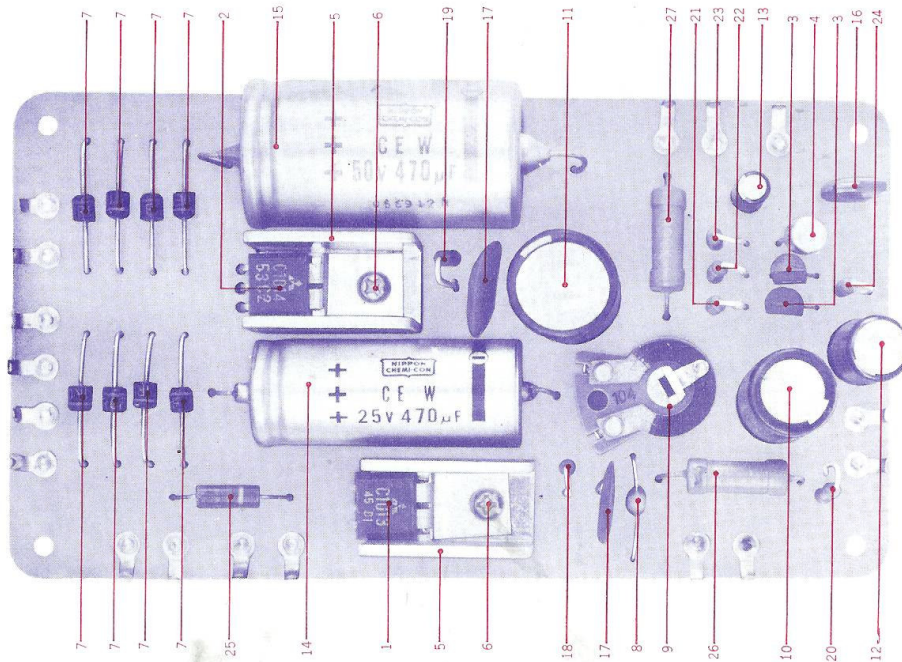


Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	H-381251	Power Source P.C. Board Assy. Comp.	AA-5547	1	20	H-361642	RD 1/4 47 Ω J	106	1
1	H-380790	Transistor 2SC1013 (D)	TR101	1	21	H-380755	RD 1/4 6.2K J	108	1
2	H-380812	Transistor 2SC1014 (D)	TR102	1	22	H-357535	RD 1/4 39K J	109	1
3	H-371935	Transistor 2SC711 (D)	TR103.4	2	23	H-349784	RD 1/4 390 Ω J	110	1
4	H-394018	Transistor 2SC968 (3)	TR106	1	24	H-380913	RD 1/4 33 Ω J	111	1
5	H-378235	Heat Sink Plate A	AA-5548	2	25	H-380845	Solid RC 1/2 W 220 Ω K	101	1
6	H-380046	ISO Screw, pan head 3 x 10		2	26	H-380856	Metal Oxide Film 2 W 10 Ω K	103	1
-	H-348107	M3 ISO Nut		2	27	H-380867	Metal Oxide Film 2 W 33 Ω K	105	1
7	H-224526	Silicon Diode 10D1	D102 to 9	8					
8	H-393963	Zener Diode AW01-13	D110	1					
9	H-380981	Semi-Variable Resistor V17K3C-1 100 KB	VR101	1					
		Capacitor, Vertical Type c							
10	H-339096	Electrolytic 470 μF 16 WV	109	1					
11	H-372148	Electrolytic 220 μF 35 WV	111	1					
12	H-324516	Electrolytic 2.2 μF 6.3 WV	112	1					
13	H-220432	Electrolytic 2.2 μF 25 WV	113	1					
-	H-373296	Electrolytic 33 μF 50 WV	116	1					
14	H-342472	Electrolytic 470 μF 25 WV (Tublar)	107	1					
15	H-460067	Electrolytic 470 μF 50 WV (Tublar)	110	1					
16	H-380957	Mylar 0.068 μF (M) 50 WV	114	1					
17	H-404346	Ceramic TLD14F 0.1 μF 25 WV	108,15	2					
		Carbon Resistor, Stopper Type	R						
18	H-211320	RD 1/4 1.5K J	102	1					
19	H-324202	RD 1/4 5.1K J	104	1					

When you order these parts, Please describe their Parts No. and Serial No. in detail

ASSEMBLY BLOCK

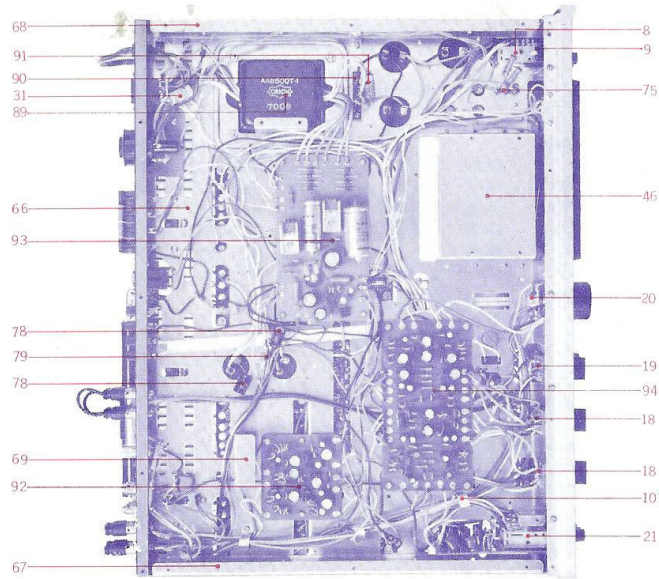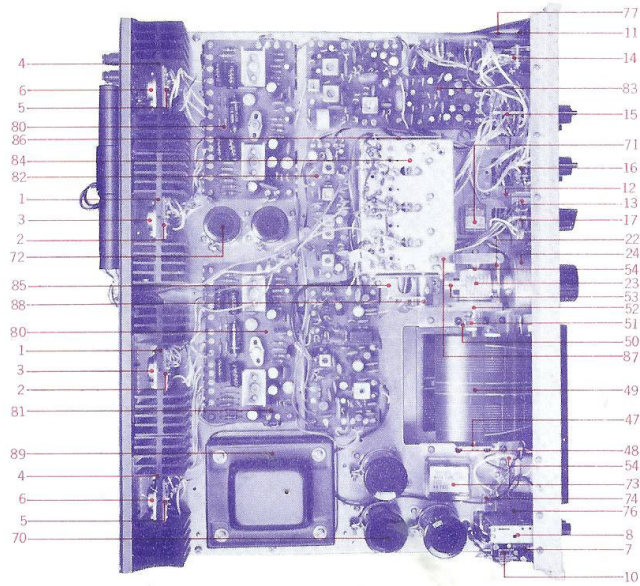

ASSEMBLY BLOCK

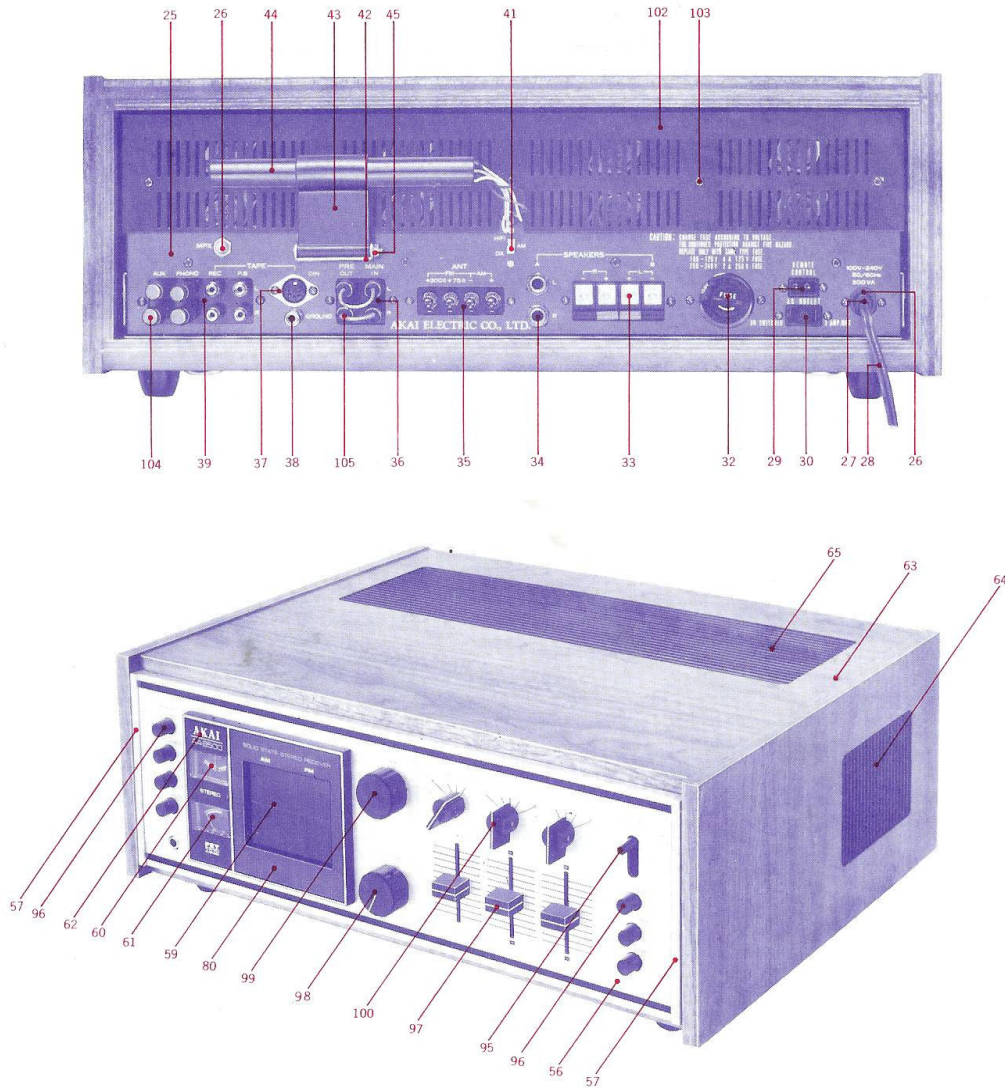

HEAT SINK (A) BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	1-381047	Heat Sink (A) Assy. Comp.	A85	2
1	1-377662	Radiator	AA-5543	2
2	1-378628	Socket, Transistor S2-104W	31-1-71	4
-	1-371856	ISO Screw, binding head 3 x 5		12
-	1-255082	Lug Plate VB2L	33-4-10	2
-	1-321390	Thermister 41D26	45-5-5	2
-	1-405112	Holder, Thermister	AA-5567	2
3	1-378641	Transistor 2SD218L	45-1-78	4

HEAT SINK (B) BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	J-381262	Heat Sink (B) Assy. Comp.	A85	2
4	J-377662	Radiator	AA-5543	2
5	J-378628	Socket, Transistor S2-104W	31-1-71	4
-	J-371856	ISO Screw, binding head 3 x 5		8
6	J-378641	Transistor 2SD218L	45-1-78	4

When you order these parts, Please describe their Parts No. and Serial No. in detail

SWITCH PLATE (L) BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	K-381150	Switch Plate (L) Assy. Comp.	A85	1
7	K-378077	Switch Plate L	AA-5533	1
8	K-379416	Push Button Switch (4 Way Control)		1
-	K-379405	ISO Screw, binding head 3 x 6		2
-	K-378088	Jack Plate	AA-5534	1
-	K-200687	Tapping Screw #2 3 x 6 (round)		2
-	K-379427	Washer (SK3) 9.1 x 11.7 x 0.25t		1
9	K-378843	Mic Jack 3PMJ1	31-2-17	1
-	K-375153	E Jack Nut		1
-	K-378854	Metal Oxide Film Resistor 2W 470 Ω K	35-15-3	2
10	K-250042	Micro Switch V-1A U/L		1

SWITCH PLATE (R) BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	L-381161	Switch Plate (R) Assy. Comp.	A85	1
11	L-378033	Switch Plate R	AA-5529	1
12	L-378055	Shield Angle	AA-5531	1
-	L-200687	Tapping Screw #2 3 x 6 (round)		3
13	L-378044	Shield Plate	AA-5530	1
14	L-378865	Lever Switch S-321-122		1
-	L-379405	ISO Screw, binding head 3 x 6		10
15	L-378876	Rotary Switch F464	25-6-27	1
16	L-378887	Rotary Switch F235		1
-	L-213636	Carbon Resistor RD1/4 10K J	35-9-3	2
17	L-378898	Rotary Switch F244		1
18	L-378900	Slide Volume LG45 100KB x 2	36-20-2	2
19	L-378911	Slide Volume (Balance) LG45 100KMN	36-20-1	1
20	L-378922	Double Volume G16T2 250KA x 2	36-22-1	1
21	L-381172	Filter P.C. Board Assy. Comp.	AA-5532	1

FLYWHEEL WORM GEAR BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	M-381137	Flywheel & Worm Gear Comp.	A85	1
22	M-377987	Shaft Bracket, w/metal	AA-5524	1
23	M-378000	Worm Shaft A	AA-5526	1
-	M-382083	Washer (Nylon) 6.1 x 13 x 1t		2
24	M-377998	Wlywheel	AA-5525	1
-	M-379383	ISO Screw, pan head 4 x 7		1
-	M-330423	Adjusting Washer 4.0 x 13 x 0.25t		3
-	M-330434	Adjusting Washer 4.0 x 13 x 0.5t		3

REAR PANEL BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	N-381183	Rear Panel Assy. Comp.	A85	1
25	N-378246	Rear Panel	AA-5549.5	1
-	N-378540	Vinyl Bushing	AA-801	1
26	N-378551	2 Core Plate	AA-803	1
27	N-246914	Strain Relax SR-2P-1	2-7-9	1
28	N-374940	U/L AC Cord 3M	26-3-18	1
-	N-379438	ISO Screw, round head 3 x 6		2
29	N-378933	2P Plug S-1 0805	31-1-68	1
-	N-393794	ISO Screw, round head 3 x 8		8
-	N-348107	ISO M3 Nut		14
30	N-378944	U/L AC Concent S-1 9122	31-1-47	1
31	N-378786	Oil Tublar Capacitor 0.01 μF (M) 600WV	24-8-4	2
32	N-233370	Power Concent (Voltage Selector) S-1 8010	40-2-3	1
33	N-378955	Push Terminal, 4PD Type (S-Q 2350)	32-1-16	1
34	N-378966	Mic Jack 2PMJ2	31-2-26	2
-	N-375153	E Jack Nut		2
35	N-378977	4P Terminal Plate X-P4852	32-1-15	1
36	N-378988	4P US Pin Jack S-Q 3460	31-1-69	1
37	N-379001	5P DIN Jack S-1 8123	31-1-24	1
38	N-379012	Metal Terminal X-Q 0204	32-1-11	1
39	N-379023	8P Pin Jack S-Q 3654	31-1-70	1
-	N-348478	Carbon Resistor RD1/4 12K J	35-9-3	4
-	N-345745	Carbon Resistor RD1/4 68K J	35-9-3	2
-	N-378696	Carbon Resistor RD1/4 51K J	35-9-3	2
40	N-379034	Volume V16N-30KB	36-7-5	1
41	N-379045	6P Slide Switch SJ-0282	25-3-36	1
-	N-379056	Mylar Capacitor 0.015 μF (M) 50WV	24-1-1	1
-	N-390971	Screw, binding head 2 x 4		2
42	N-378257	Antenna Channel	AA-5551	1
-	N-372104	Tapping Screw #2 3 x 6 (round)		2
43	N-378268	Antenna Holder	AA-5552	1
44	N-379067	Bar Antenna	55-1-3	1
-	N-273914	M4 Spring Washer		2
45	N-379451	ISO Screw, round head 4 x 50		1
-	N-348030	ISO M4 Nut		1

When you order these parts, Please describe their Parts No. and Serial No. in detail

DIAL DRUM BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	O-381115	Dial Drum Assy. Comp. (U,O)	A85	1
-	O-381126	Dial Drum Assy. Comp. (A)	A85	1
-	O-381104	Dial Drum Assy. Comp. (J)	A85	1
46	O-377774	Dial Plate	AA-5507	1
47	O-377796	Drum Shaft A	AA-5509	1
-	O-270123	"E" Ring 4M	6-1-9	1
-	O-382083	Washer (Nylon) 6.1 x 13 x 11		1
48	O-382094	Drum Angle A	AA-5508	1
49	O-377807	Drum A	AA-5510	1
-	O-393827	ISO Set Screw 3 x 4		2
-	O-377820	Scale Film A (U,O)	AA-5512	1
-	O-377818	Scale Film B (J)	AA-5511	1
-	O-378180	Scale Film C (A)	AA-5557	1
50	O-377785	Drum Angle B	AA-5508	1
51	O-377831	Metal B	AA-5513	1
-	O-273600	M12 Toothed Lock Washer		1
-	O-303344	M12 Hexagon Nut	RD643	1
52	O-377842	Spur Gear A	AA-5514	1
-	O-377853	Friction Ring A 12.5 x 26.5 x 1t (Rubber)	AA-5515	1
53	O-377864	Worm Gear A	AA-5516	2
-	O-377875	Worm Pin B L=9	AA-5517	1
-	O-377897	Worm Pin A L=13	AA-5517	1
-	O-377886	Friction Ring B 12.5 x 26.5 x 1t	AA-5515	1
-	O-243437	Spring, Worm Gear A	BT-170	1
54	O-377908	Friction Spring	AA-5518	1
-	O-377910	Friction Collar	AA-5519	1
-	O-393827	ISO Set Screw 3 x 4		1
-	O-381137	Flywheel & Worm Gear Comp.	A85	1
-	O-377943	Lamp P.C. Board	AA-5521	2
-	O-295312	Lamp #2 8V 0.2A	28-2-8	2
55	O-377921	Right Plate A	AA-5520	1
-	O-377932	Right Plate B	AA-5520	1
-	O-377954	Right Case	AA-5522	2
-	O-377965	AF Plate A (Blue)	AA-5523	1
-	O-377976	AF Plate B (Green)	AA-5523	1
-	O-379372	ISO Screw, Countersunk Head 3 x 12		4
-	O-348107	M3 ISO Nut		4

AMPLIFIER PANEL BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
-	P-381148	Amplifier Panel Assy. Comp.	A85	1
56	P-378382	Amplifier Panel	AA-5606	1
57	P-378336	Side Frame	AA-5601	2
58	P-378393	Dial Esuctchon	AA-5608	1
-	P-378426	Stereo Indicator (Red)	AA-5612	1
59	P-378404	Scale Plate	AA-5610	1
-	P-378415	Scale Plate Holder	AA-5611	2
-	P-375118	Screw, binding head 2.3 x 6		4
-	P-259391	Washer (SUP) 2.4 x 6 x 0.35t		4
-	P-355555	Screw, binding head 2.6 x 6		8
-	P-378270	Lamp Meter Holder B	AA-5553	1
-	P-390982	Rubber Bushing D9		1
-	P-408960	Small Lamp 24V 35MA 600MM	28-2-15	1
60	P-378821	Meter SB-45 (No. 4398DS) (FM)	46-1-31	1
61	P-378832	Meter V-45 (No. 4397DS)	46-1-30	1
-	P-379405	ISO Screw, binding head 3 x 6		4
62	P-378527	Name Plate	AA-5624	1

WALNUT CASE BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity
63	Q-381058	Walnut Case Assy. Comp.	A85	1
64	Q-377122	Esuctchon A	AA-793	2
65	Q-377133	Esuctchon B	AA-794	1
-	Q-379293	Wood Screw, round head 3.1 x 10		32
-	Q-377190	LM Rubber Foot	LM-404	4
-	Q-259830	Washer (SPC) 4.5 x 9.8 x 0.5t		4
-	Q-379304	Wood Screw, round head 3.8 x 25		4
-	Q-405606	Case Supporting Angle	AA-5626	2

When you order these parts, Please describe their Parts No. and Serial No. in detail

FINAL ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Quantity	Ref. No.	Parts No.	Description	Schematic No.	Quantity
66	R-377695	Main Chassis	AA-5501	1	88	R-377741	Boss, w/plate gear A,B Comp.	AA-5505,6	1
67	R-377706	Channel Chassis A	AA-5502	1	-	R-379315	ISO Set Screw 3 x 4		2
68	R-377717	Channel Chassis B	AA-5502	1	-	R-243437	Spring, Plate Gear	BT-170	1
-	R-200700	Tapping Screw # 2 4 x 8 (round)		8	89	R-378764	Power Transformer T-1	38-4-95	1
69	R-377728	Chassis Setting	AA-5503	1	90	R-378775	Silicon Diode 5B4	45-2-34	1
70	R-378652	Electrolytic Capacitor 1000 μ F 100WV	24-10-52	3	91	R-378786	Oil Tubular Capacitor 0.01 μ F (M) 600WV	24-8-4	1
-	R-200687	Tapping Screw # 2 3 x 6 (round)		8	92	R-381240	Equalizer Amp. P.C. Board Assy. Comp.	AA-5546	1
71	R-378663	Sub Miniature Relay MH2PM-1	47-2-16	1	93	R-381251	Power Source P.C. Board Assy. Comp.	AA-5547	1
-	R-350594	Ceramic Capacitor TLD14F 0.1 μ Z 25WV	24-5-52	1	94	R-381003	Pre-Amp. P.C. Board Assy. Comp.	AA-5545	1
72	R-378674	Electrolytic Capacitor 1000 μ F 63WV	24-10-61	2	95	R-378450	Lever Switch Knob	AA-5615	1
73	R-378685	2P Fuse Holder, w/cover	40-1-10	1	96	R-378461	Push Switch Knob	AA-5616	7
-	R-200687	Tapping Screw # 2 3 x 6 (round)		6	-	R-378483	Spring, Knob	AA-5618	10
74	R-255115	Lug Plate VB2L2	33-4-3	1	97	R-378472	Slide Knob	AA-5617	3
-	R-378696	Carbon Resistor RD1/4 51K J	35-9-3	4	98	R-378494	TV Knob A	AA-5619	1
-	R-213636	Carbon Resistor RD1/4 10K J	35-9-3	2	99	R-378505	TV Knob B	AA-5619	1
75	R-255082	Lug Plate VBL2	33-4-10	2	-	R-393805	ISO Set Screw 4 x 10.7		2
-	R-273778	M3 Earth Lug		1	100	R-378516	Rotary Switch Knob	AA-5620	3
76	R-378090	Switch Plate Supporting	AA-5535	1	-	R-393816	ISO Set Screw 4 x 5		3
77	R-378303	Side Frame Supporting	AA-5556	4	101	R-259233	Wire Band C	3A-745	5
-	R-329826	HI-Q Capacitor 220PF (K) 50WV	24-6-4	2	-	R-378437	Bottom Plate	AA-5613	1
78	R-450224	Electrolytic Capacitor 10 uF 50WV	24-12-10	2	-	R-396358	Wood Case Washer	AA-5625	4
79	R-254970	Lug Plate KP1L1	33-3-3	1	-	R-400702	ISO Screw, truss head 4 x 25		4
-	R-295312	Lamp # 2 8V 0.2A	28-2-8	1	102	R-378448	Rear Panel Plate	AA-5614	1
80	R-380992	Main Amp. P.C. Board Assy. Comp.	AA-5539	2	103	R-372104	Tapping Screw # 2 3 x 6		5
-	R-378167	Lead-wire Holder	AA-5541	1	-	R-378595	Fuse ST-2 4A	39-1-26	1
81	R-381238	FM-IF P.C. Board Assy. Comp.	AA-5538	1	-	R-277413	Fuse ST-2 2A	39-1-26	1
82	R-381216	AM-IF P.C. Board Assy. Comp. (J,U,A)	AA-5537	1	104	R-378797	Short Pin Plug	42-1-37	2
-	R-381228	AM-IF P.C. Board Assy. Comp. (O)	AA-5537	1	105	R-402603	Pin Plug Cord	42-1-43	2
83	R-381194	MPX. P.C. Board Assy. Comp. (U,A,O)	AA-5536	1	-	R-378573	FM Dipole Antenna A (J)	55-1-1	1
-	R-381205	MPX. P.C. Board Assy. Comp. (J)	AA-5536	1	-	R-378548	FM Dipole Antenna B (U,A,O)	55-1-2	1
84	R-378753	FM Front End (Tuner) 43SN3FI-251 (U,O)	53-1-7	1					
-	R-378371	FM Front End (Tuner) 43SN3FI-252 (J)	53-1-9	1					
-	R-378742	FM Front End (Tuner) 43SN3FI-253 (A)	53-1-8	1					
-	R-213895	Carbon Resistor RD1/4 150K K	35-9-3	1					
85	R-395728	Boss Supporting Angle	AA-5566	1					
86	R-377730	Front End Angle	AA-5504	2					
87	R-378022	Shaft Retaining Holder	AA-5528	1					

When you order these parts, Please describe their Parts No. and Serial No. in detail