  <b>SERVICE BULLETIN</b>	model number	bulletin number
	2216	<b>M-2216-2</b>
	for serial numbers	
	ALL	subject
	<b>SERVICE MANUAL CORRECTIONS</b>	
technical services approval	writer	
<i>[Signature]</i>	<i>[Signature]</i>	
engineering approval	date	
<i>[Signature]</i>	8-31-77	

OBJECTIVE


This bulletin is issued to correct misprints in the Marantz Model 2216 Service Manual.

APPLICATION

Incorporate these changes into your manual as soon as possible to ensure correct service information.

PROCEDURE

- A. Refer to the manual, page 18, SCHEMATIC DIAGRAM and locate Ref. Desig. R142. Delete the resistor tie point at ground and show it connected to the collector of Transistor H111.

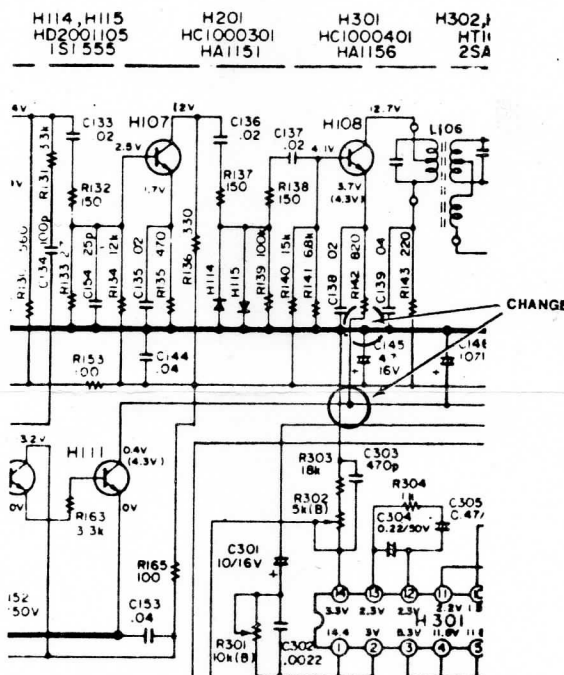

- B. Refer to the manual, page 18, SCHEMATIC DIAGRAM and locate Ref. Desig. H302 on the P100 Circuit Board and change the following voltages:

H302 Emitter Voltage    From 0.6V    To 2.2V  
H302 Base Voltage        From 0.0V    To 3.8V