


SA-7700

STEREO AMPLIFIER KU KC

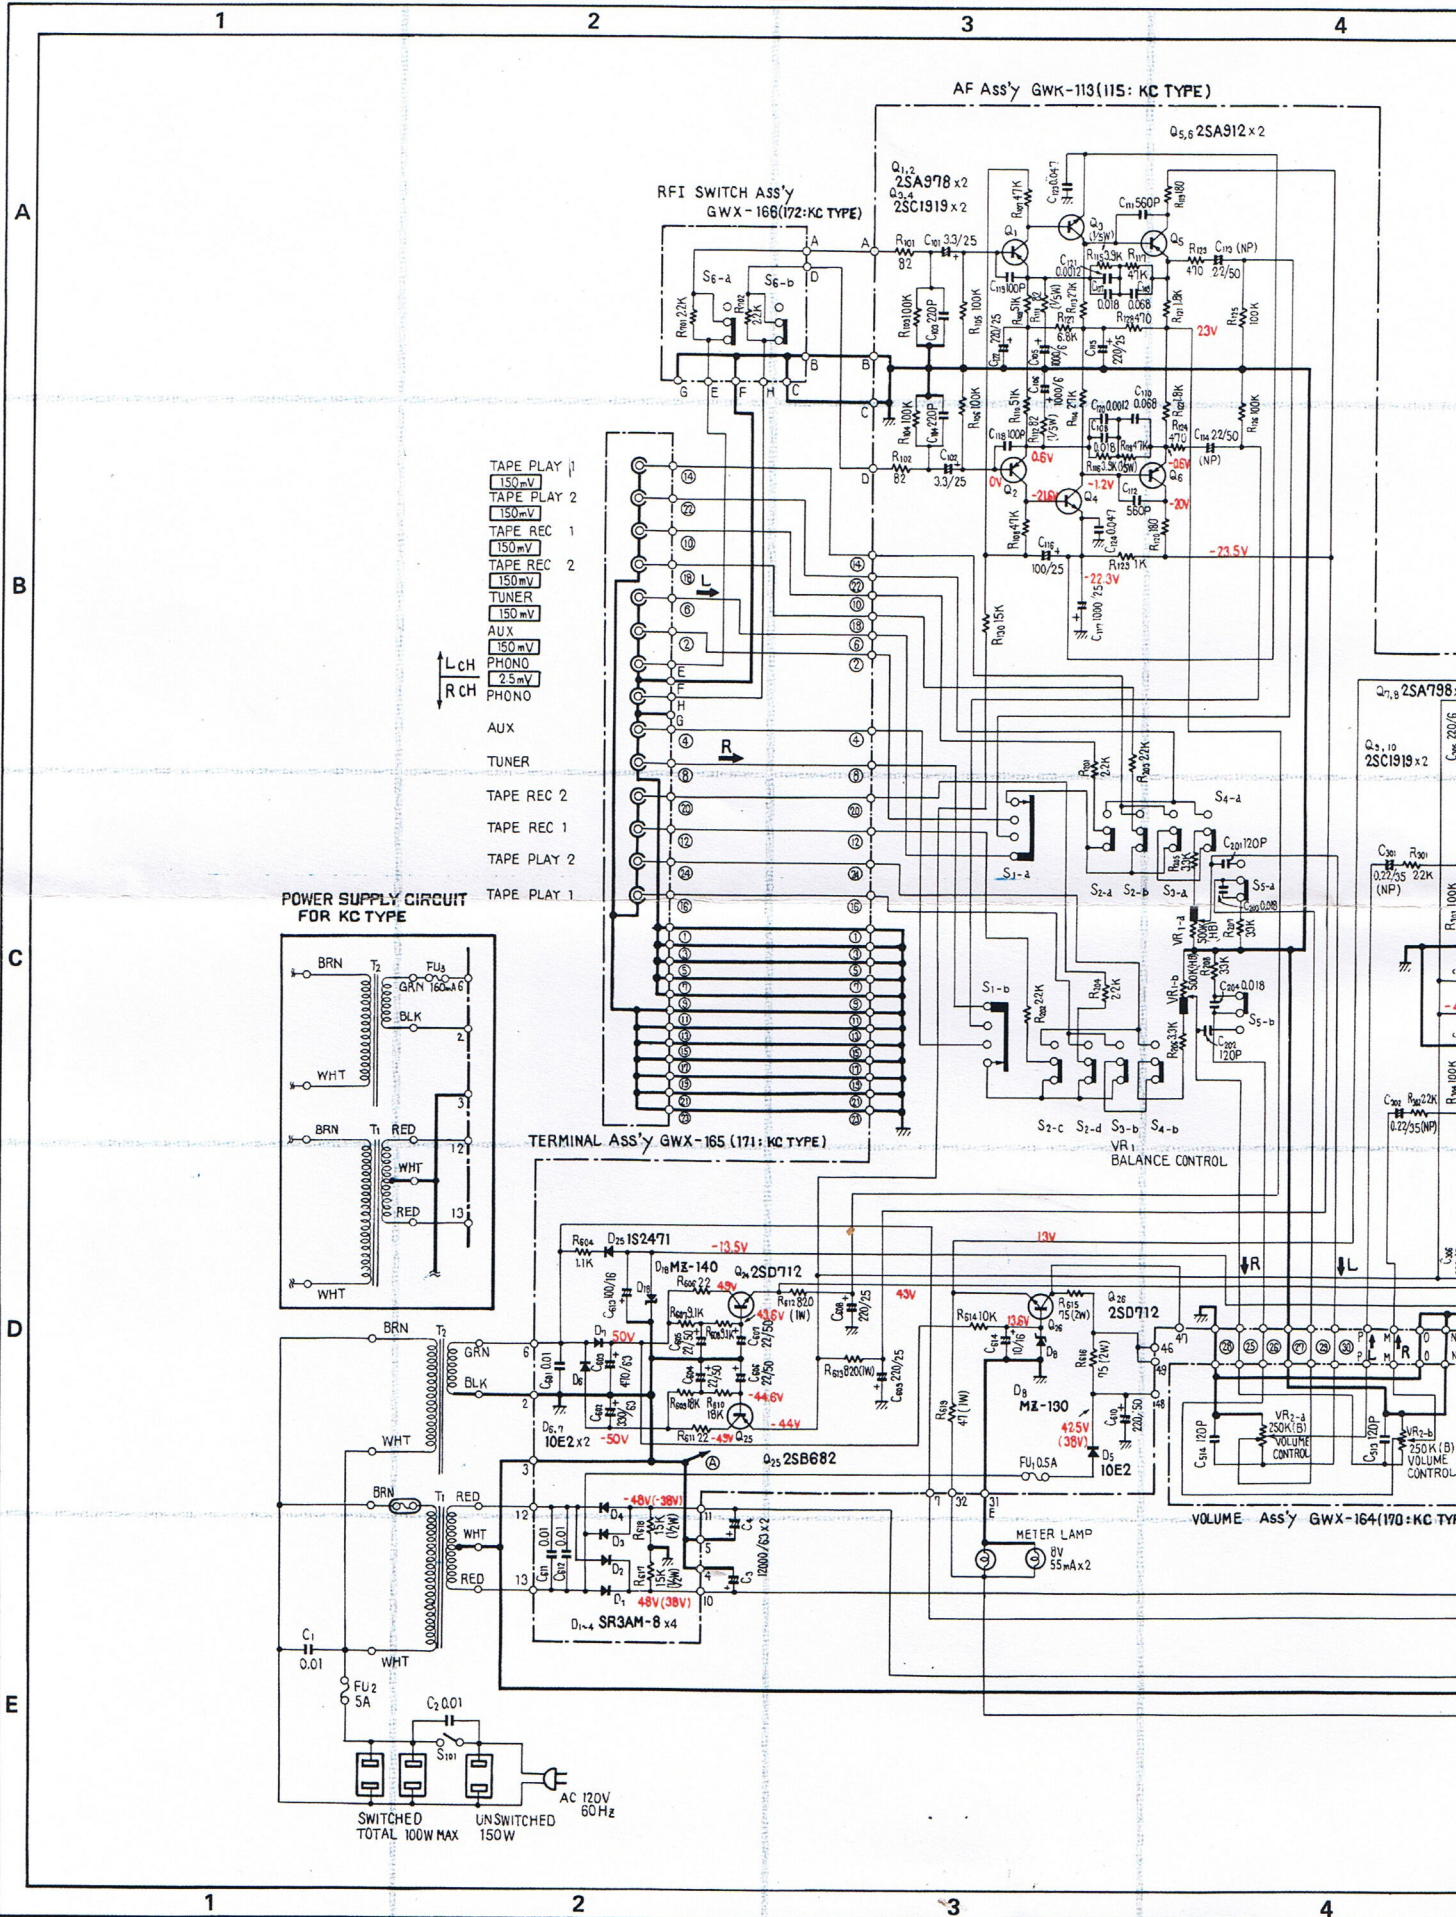

5

6

7

8

A
B
C
D
E

ORS ;
OHM 1/4W ±5% TOLERANCE UNLESS OTHERWISE NOTED K; kΩ M; MΩ

TORS ;
μF UNLESS OTHERWISE NOTED P: pF

V : SIGNAL VOLTAGE AT 60W +60W 8Ω OUTPUT (1KHz)

V : DC VOLTAGE AT NO INPUT SIGNAL

A : DC CURRENT AT NO INPUT SIGNAL

V : DC VOLTAGE AT 60W OUTPUT

SWITCHES:

S₁₀₁ POWER ON - OFF

S₁₀₂ SPEAKER

- 1. OFF
- 2. A
- 3. B
- 4. A + B

S₁ FUNCTION

- 1. TUNER
- 2. PHONO
- 3. AUX

S₂ DUPLICATE ON - OFF


S₃ TAPE MONITOR 1 ON - OFF

S₄ TAPE MONITOR 2 ON - OFF

S₅ LOUDNESS ON - OFF

S₆ PHONO INTERFERENCE ON - OFF

is the basic schematic diagram, but the actual circuit may vary due to improvement in design.

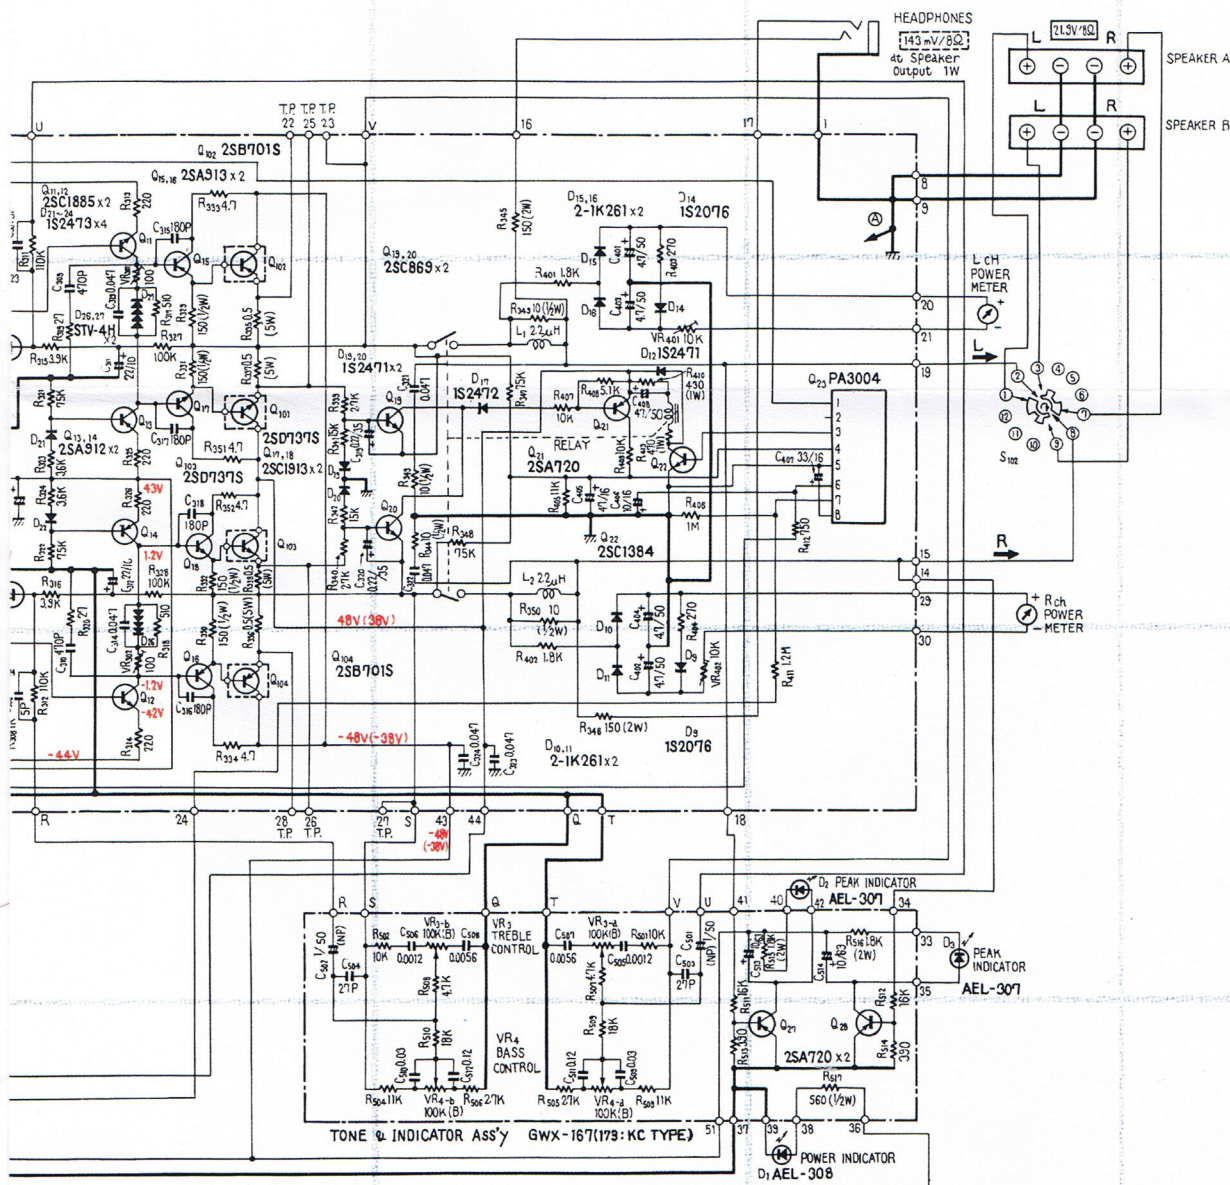

5

6

7

8