


SERVICE MANUAL

669
PURE POWER DC STEREO RECEIVER

SANSUI G-7500

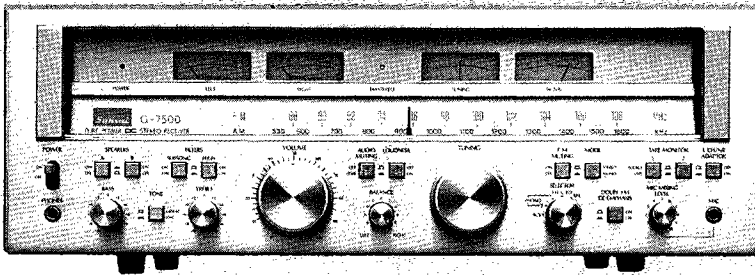

SPECIFICATIONS

Audio section

Power output	90 watts per channel into 8 ohms
Min. RMS, both channels driven, from 20 to 20,000 Hz, with no more than 0.025 % total harmonic distortion.	
Load impedance	8 ohms
Total harmonic distortion	less than 0.025 % at or below rated min. RMS power output
Intermodulation distortion (70 Hz : 7 kHz = 4:1 SMPTE method)	less than 0.025 % at rated power output
Rise time	1.4 μ sec
Slew rate	60 V/ μ sec
Frequency response (at 1 watt)	
Overall (from AUX)	5 to 50,000 Hz +0.2 dB, -2.0 dB
Power amplifier	DC to 200 kHz, +0 dB, -3.0 dB
RIAA curve deviation (PHONO, 20 Hz to 20 kHz)	+0.2 dB, -0.2 dB
Damping factor (20 Hz to 20 kHz, both channels driven)	50 into 8 ohms
Input sensitivity and impedance (at 1 kHz)	
PHONO-1, 2	2.5 mV/47 kilohms
(Max. input capability: 240 mV at 1 kHz, less than 0.1 % total harmonic distortion.)	
MIC	6 mV/10 kilohms
TAPE-1, 2 PLAY, AUX	150 mV/47 kilohms
Output level (at 1 kHz)	
TAPE-1, 2 REC (pin jacks)	150 mV
TAPE-2 REC/PLAY (DIN socket)	43 mV
Hum and noise (short-circuit, A-network)	
PHONO-1, 2	78 dB
TAPE-1, 2 PLAY, AUX	95 dB
Channel separation (at 1 kHz)	
PHONO-1, 2	60 dB
TAPE-1, 2 PLAY, AUX	65 dB
Controls	
BASS	± 10 dB at 50 Hz
TREBLE	± 10 dB at 10 kHz
SUBSONIC FILTER	-3 dB at 16 Hz (6 dB/oct)
HIGH FILTER	-3 dB at 3 kHz (6 dB/oct)
LOUDNESS (VOLUME control: -30 dB position)	8 dB at 50 Hz 6 dB at 10 kHz
AUDIO MUTING	-20 dB

FM section

Tuning range	88 to 108 MHz
Usable sensitivity	
Mono IHF	10.3 dBf (1.8 μ V)
DIN	1.0 μ V
Stereo IHF	17 dBf
50 dB quieting sensitivity	
Mono	14 dBf
Stereo	36 dBf
Signal to noise ratio (at 65 dBf)	
Mono	72 dB
Stereo	68 dB
Distortion (at 65 dBf)	
Mono	less than 0.15 % at 100 Hz less than 0.13 % at 1,000 Hz less than 0.25 % at 6,000 Hz
Stereo	less than 0.25 % at 100 Hz less than 0.18 % at 1,000 Hz less than 0.25 % at 6,000 Hz
Alternate channel selectivity (at 400 kHz)	75 dB
Capture ratio	1.0 dB
Image response ratio	70 dB
Spurious response ratio	90 dB
IF response ratio	95 dB
Stereo separation	35 dB at 100 Hz 42 dB at 1,000 Hz 30 dB at 10,000 Hz 25 dB from 30 to 15,000 Hz
Frequency response	30 to 15,000 Hz +0.2 dB, -1.0 dB
Antenna input impedance	300 ohms balanced 75 ohms unbalanced

Sansui

SANSUI ELECTRIC CO., LTD.

to be continued

Specifications

AM section

Tuning range 530 to 1,600 kHz
 Usable sensitivity (bar antenna) 50 dB/m (300 μ V/m)
 Selectivity (± 10 kHz) 35 dB
 Signal to noise ratio 46 dB
 Distortion (at 30 % Modulation, 80 dB/m) less than 0.5 %

Others


Power requirements
 Power voltage 100, 120, 220, 240 V (50/60 Hz)
 For U.S.A. and Canada 120 V (60 Hz)
 Power consumption
 Rated consumption 285 watts 350 VA

Dimensions 505 mm (19-15/16") W
 182 mm (7-1/8") H
 409 mm (16-1/8") D
 Weight 17.2 kg (37.9 lbs) net
 19.7 kg (43.4 lbs) packed


* Design and specifications subject to change without notice for improvements.

1. BLOCK DIAGRAM

1-1. Audio Section

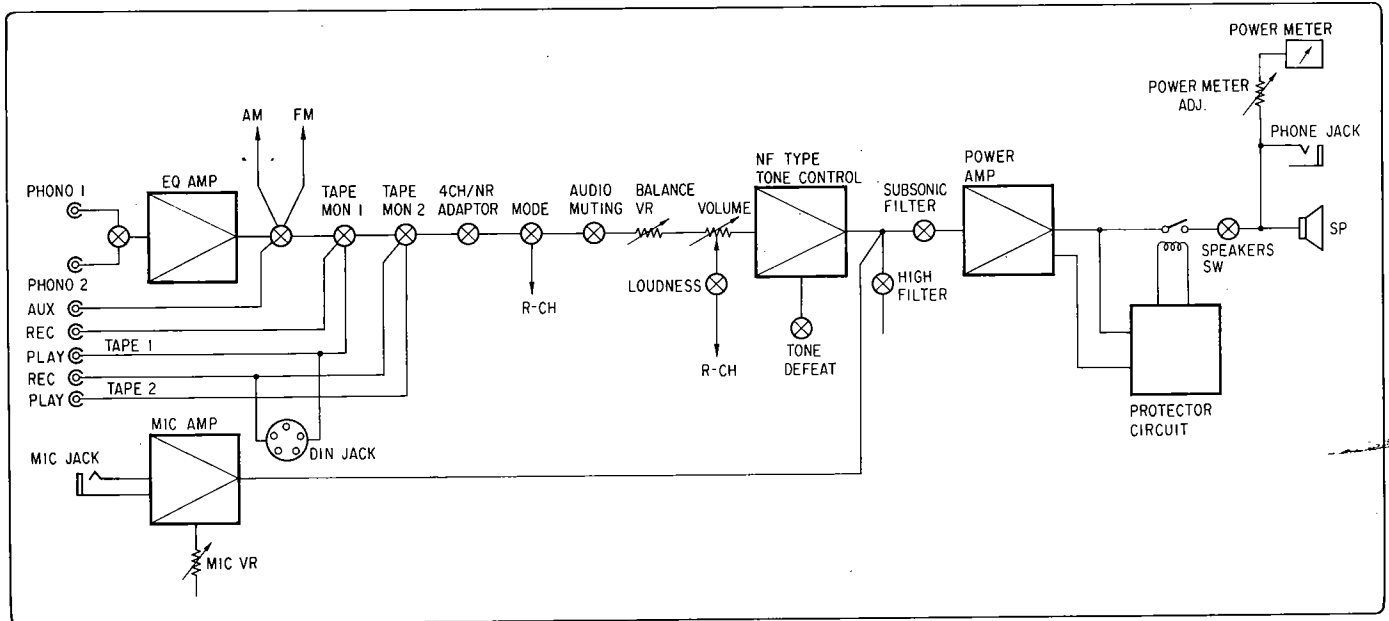


1-2. Tuner Section

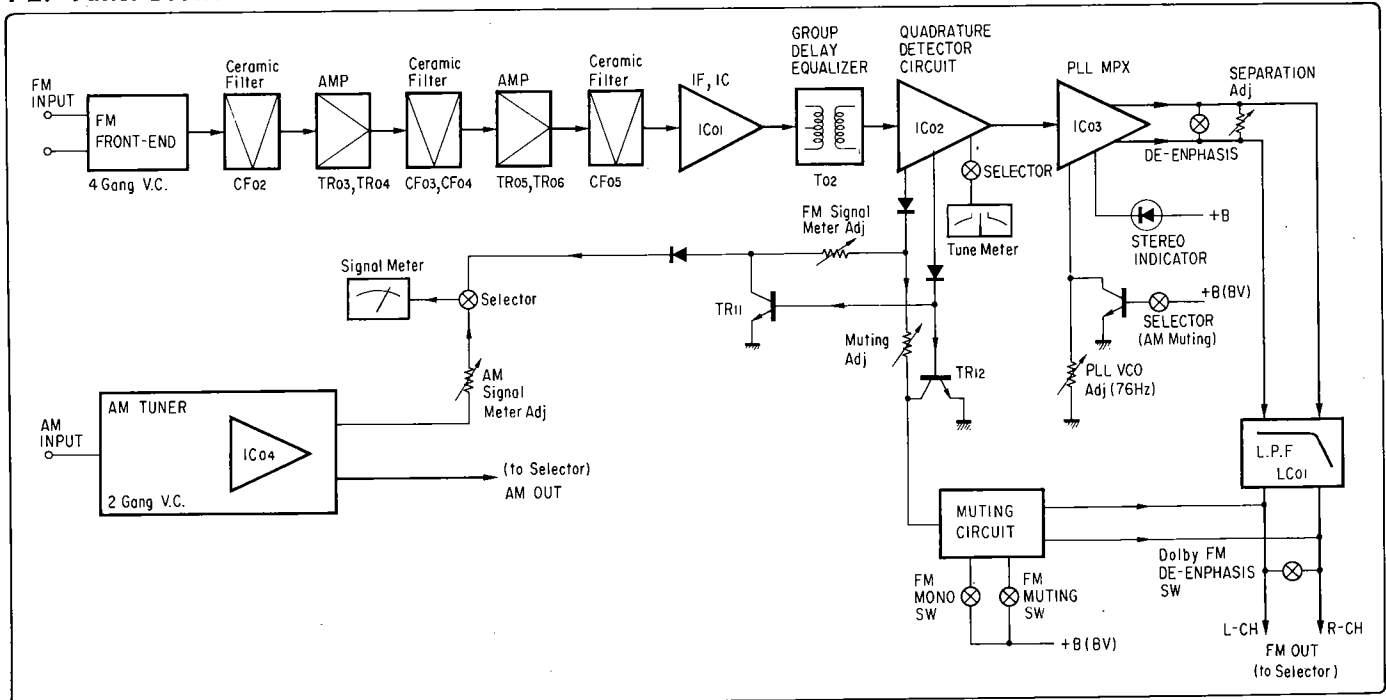

2. OPERATION

2-1. Protector Circuit With IC, HA12002

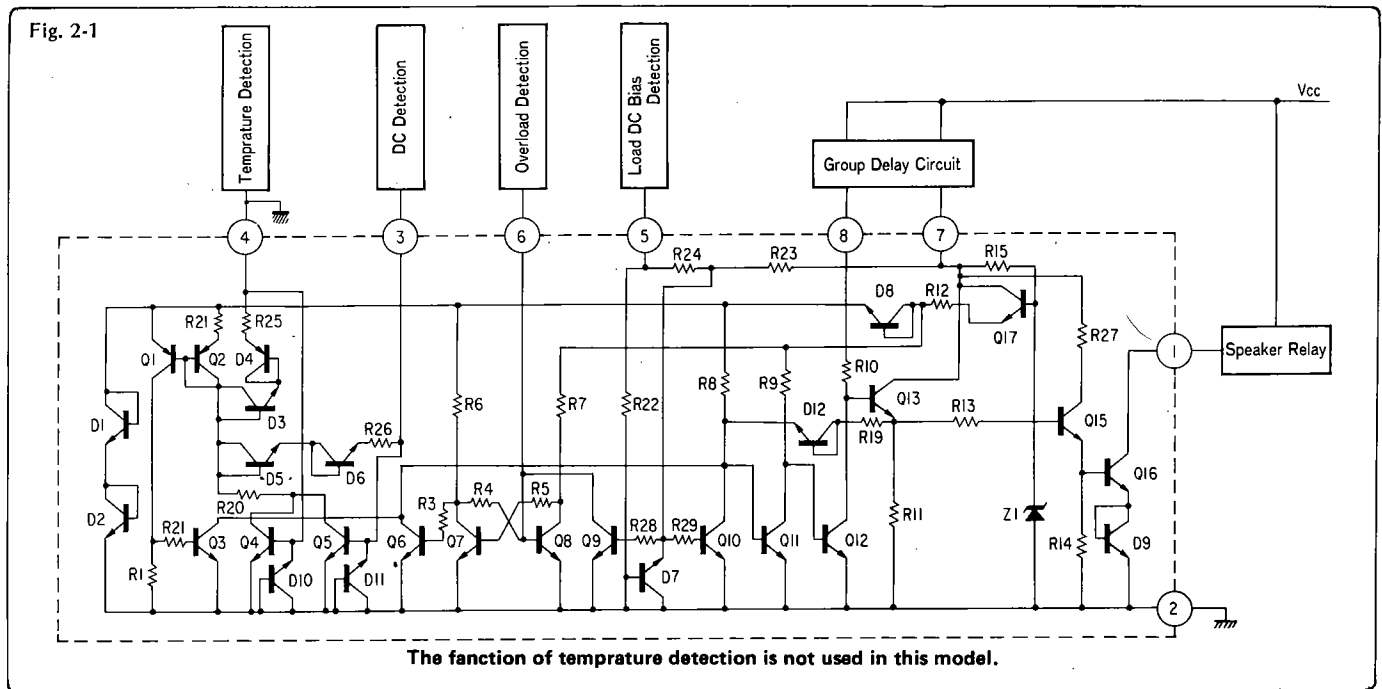

Protector circuit with IC, HA-12002

This protector IC provides the input terminals for detecting \pm DC voltage, Overload, temperature rise, and pop-noise occurred at switching the power, and output terminal for switching the speaker relay. By the function above, when there are any disorder with amplifier, the output is immediately separated from speaker to protect amplifier.

* Prevention against pop-noise at switching the power.

Since the relay RL601 remains OFF for a certain period by the time constant of R611 and C624 when power switch is turned ON, the pop-noise can be eliminated. When turning OFF the power switch, the voltage drop of pin No. 5 is faster than that of Pin No. 7, 8, therefore, the speaker relay turns OFF as soon as power is switched OFF. Resultly, the pop-noise occurred at switching the power OFF is eliminated.

* \pm DC voltage detection


When DC voltage over +1.6V and under -1.86V are applied to pin No. 3 to be its voltage detected by R01, R02, and C626, the speaker relay is turned OFF.

* Detection against overload

When speaker terminal of amplifier is shorted or over loaded, the excessive current flows into emitter resistor R71 of power transistor and makes TR19 ON and if the DC voltage of pin No. 6 rises over +1.4V by above phenomenon, the relay is turned OFF. The relay is kept OFF in spite of the DC voltage being dropped. In order to reset the relay, it is necessary to turn the power switch OFF.

* Detection against temperature rise

As this function is not used in this model, pin No. 4 is grounded.

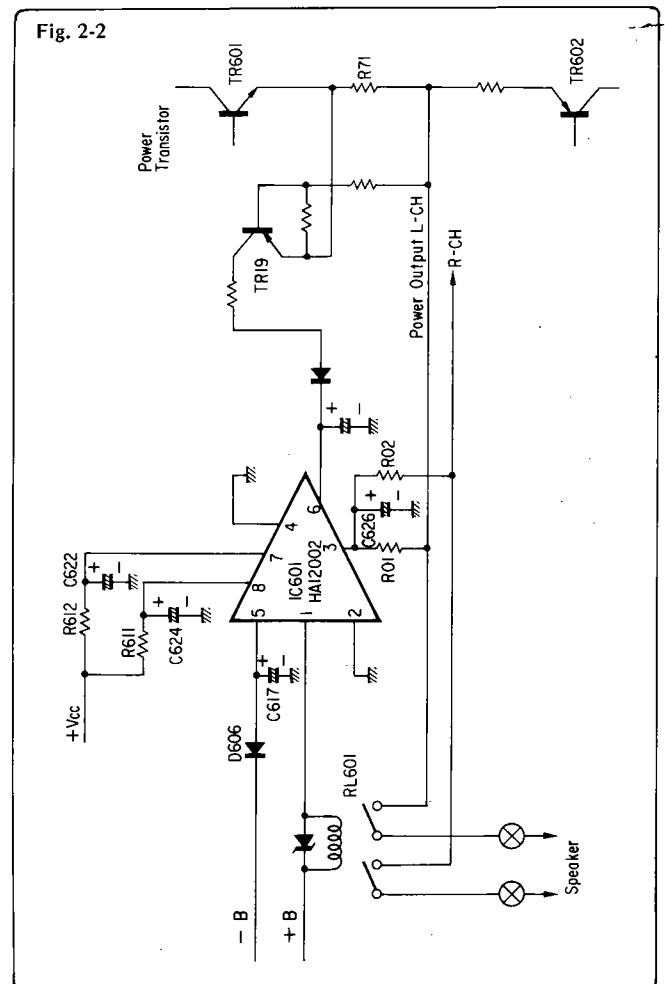

3. ADJUSTMENTS

•Abbreviations


Equipment	
AM FM Generator Oscilloscope	Genescope
AM Standard Signal Generator	AM SSG
FM Standard Signal Generator	FM SSG
FM Stereo Generator	Stereo SG
Oscilloscope	Scope
Audio Oscillator	Audio Osc.
Distortion Meter	Dist. Meter

Others

Clockwise	CW.
Counterclockwise	CCW.
Antenna	ANT.
Modulation	MOD.

3-1. AM IF, RF Adjustment & Dial Calibration (See Fig. 3-1 on page 5)

- Note: 1. Selector AM
 2. Confirm start point of dial pointer before alignment.

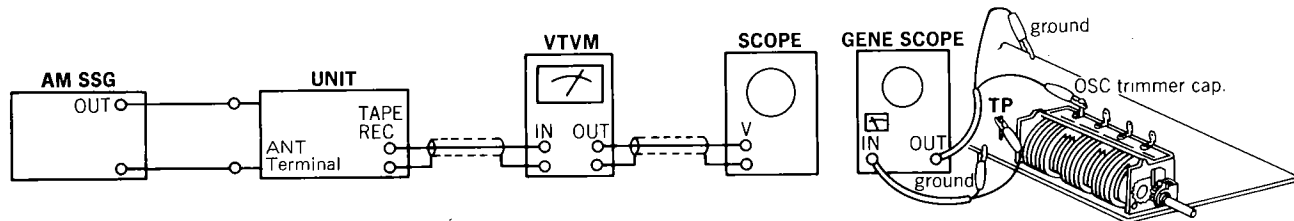


STEP	SUBJECT	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR	REMARKS
		FROM	TO				
1.	IF Coil	Genescope Output 45 dB	VT01b F-2614	TP6 F-2614	T06, T07 F-2614	Max. IF waveform	
2.	600 kHz Dial Calibration	600 kHz ANT Input 60 dB 400 Hz (MOD 30%) AM SSG	AM ANT terminal	REC OUT L or R-CH VTVM & Scope	L13 F-2614	Max. Output	
	1400 kHz Dial Calibration	1400 kHz ANT Input 60 dB 400 Hz (MOD 30%) AM SSG	Same as above	Same as above	VT01d F-2614	Same as above	
3.	600 kHz RF Adj.	600 kHz ANT Input 60 dB 400 Hz (MOD 30%) AM SSG	Same as above	Same as above	L702 Bar Antenna	Same as above	
	1400 kHz RF Adj.	1400 kHz ANT Input 60 dB 400 Hz (MOD 30%) AM SSG	Same as above	Same as above	VT01b F-2614	Same as above	
4.	Signal Meter volume	1000 kHz ANT Input 76 dB 400 Hz (MOD 30%) AM SSG	Same as above	Signal Meter	VR05 F-2614	4.3 on meter	

3-2. FM Adjustment (See Fig. 3-1 on page 5)

Note: 1. Selector FM AUTO
 2. FM Muting Switch OFF

3. Connect the output of genescope to TP through 100 pF ceramic capacitor.

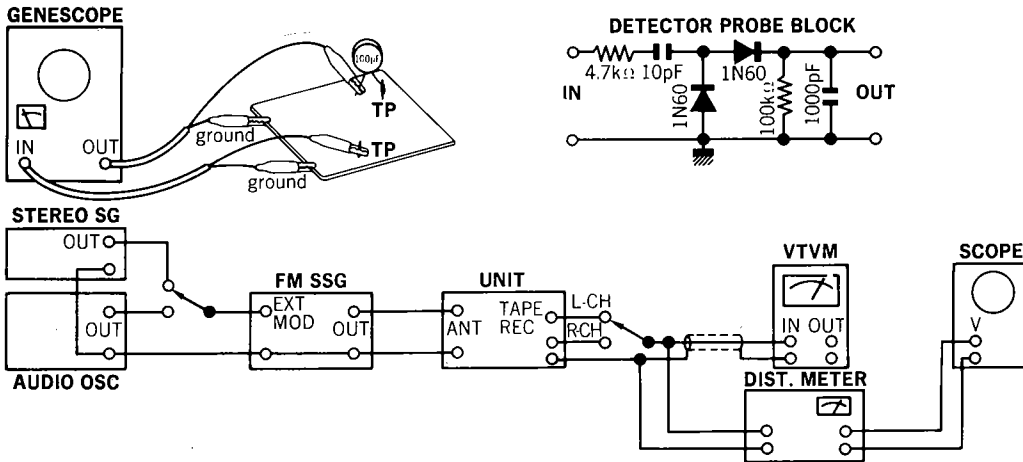

(1) FM IF, RF Adjustment & Dial Calibration


STEP	SUBJECT	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR	REMARKS
		FROM	TO				
1.	IF Coil	Output 90 dB Genescope	TP1 F-2614	TP3 F-2614 Use Detector Probe	T01 F-2614	Max. IF waveform	
		Output 80 dB Genescope	Same as above	TP4 F-2614 Use Detector Probe	T02 F-2614	Same as above	
2.	Discriminator Coil	Output 50 dB Genescope	Same as above	TM04 (Pin Ass'y) F-2614	T03 T04 F-2614	Center indication on tune meter Max. linearity of S curve Steep linearity of S curve Set output wave to dip point (It's minimum distortion)	
3.	90 MHz Dial Calibration	90 MHz ANT Input 40 dBf (34.8 dB) 1 kHz (100% MOD) FM SSG	ANT terminal 300Ω	REC OUT L or R-CH VTVM & Scope	L05 F-2614	Max. Output	
	106 MHz Dial Calibration	106 MHz ANT Input 40 dBf (34.8 dB) 1 kHz (100% MOD) FM SSG	Same as above	Same as above	TC01 F-2614	Same as above	
4.	90 MHz RF Adj.	90 MHz ANT Input 30 dBf (24.8 dB) 1 kHz (100% MOD) FM SSG	Same as above	Same as above	L01, L02, L03 F-2614	Same as above	
	106 MHz RF Adj.	106 MHz ANT Input 30 dBf (24.8 dB) 1 kHz (100% MOD) FM SSG	Same as above	Same as above	VT01a, VT01c, VT01e F-2614	Same as above	
5.	Signal Meter Volume	98 MHz ANT Input 105 dBf (99.8 dB) 1 kHz (100% MOD) FM SSG	Same as above	Signal Meter	VR11 F-2615	4.7 on Meter	

(2) FM STEREO Adjustment

STEP	SUBJECT	FEED SIGNAL		MEASURE OUTPUT	ADJUST	ADJUST FOR	REMARKS
		FROM	TO				
1.	PLL VCO Adj.	98 MHz ANT Input 65 dBf (59.8 dB) FM SSG Pilot 19 kHz (9% MOD) SUB 1 kHz + Pilot (100% MOD) STEREO SG	ANT terminal 300Ω	Stereo indicator	VR01 F-2614	Light indicator	Adjust the VR within center of lighting level.
	PLL VCO Adj. In case of using Freq. counter.	98 MHz ANT Input 65 dBf (59.8 dB) FM SSG (no MOD)	Same as above	TP5 F-2614 Use Freq. counter	VR01 F-2614	76 kHz ±200 Hz	For this adjustment, run the unit more than 30 seconds.
2.	Separation	98 MHz ANT Input 65 dBf (59.8 dB) FM SSG Pilot 19 kHz (9% MOD) R Mode 1 kHz + Pilot (100% MOD) STEREO SG	ANT terminal 300Ω	REC OUT L-CH VTVM & Scope	VR02 F-2614	Min. Output -40 dB	Confirm separation L-CH → R-CH -40 dB
3.	Muting level & indicator level	98 MHz ANT Input 23 dBf (17.8 dB) FM SSG Pilot 19 kHz (9% MOD) SUB 1 kHz + Pilot (100% MOD) STEREO SG	Same as above	Stereo indicator	VR12 F-2615	Muting level 23 dBf (17.8 dB) Indicator lighting level 23 dBf (17.8 dB)	

● Adjusting or Connecting Points on AM, FM & FM MPX circuit board, F-2614 & F-2615

Fig. 3-1

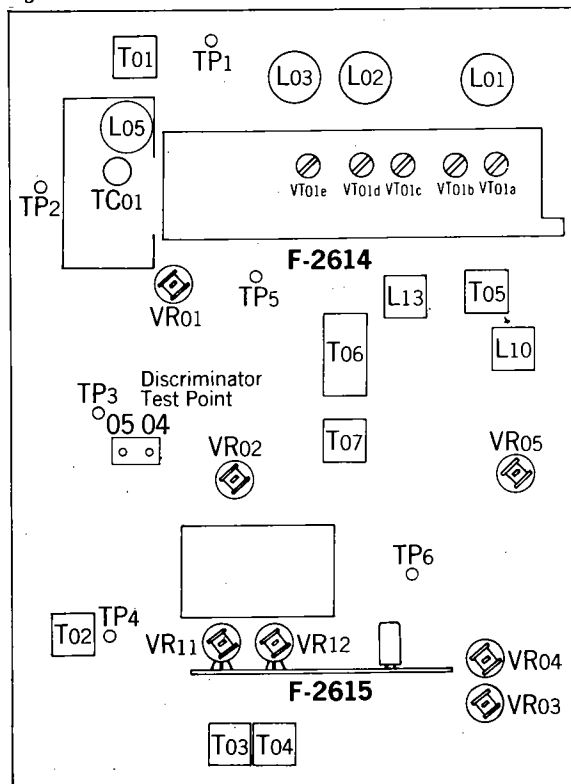


● NEW MEASUREMENT FOR FM.

Input signal level under the provision of IHFM-T-200, a new measurement method is indicated by available power ratio "dBf". To obtain approximate available power ratio "dBf", abstract 0.8 from attenuator indication of general FMSG (open load indication type); however, the former measurement, IHFM-T-100 is designated together too.

The way of modulation on IHFM-T-200 is shown below.

	modulation frequency	modulation mode	modulation factor
FM MONO	1000 Hz		100%
FM STEREO	1000 Hz	SUB	Pilot 9% Pilot + SUB 100%

● The relation between the standard input 65 dBf of IHFM-T-200 and the former indication "dB" is shown below.

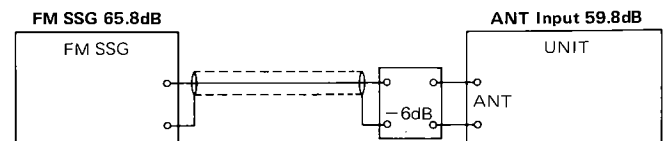

3-3. Audio Section

(1) Driver Circuit Board Adjustments (See Fig. 3-2 & 3-4)

Note: 1. Master Volume Minimum

2. For adjustment, run the unit for more than 3 minutes after the power is switched on.

STEP	SUBJECT	EQUIPMENT	MEASURE OUTPUT	ADJUST	ADJUST FOR	REMARKS
1.	DC 0V L-CH	DC Volt Meter Fig. 3-4	Speaker Terminal	VR01 F-2980	DC 0V \pm 5mV	o Before turning ON power switch, set VR01 and VR02 to center position.
2.	DC 0V R-CH	Same as above Fig. 3-4	Same as above	VR02 F-2980	DC 0V \pm 5mV	
3.	Bias Current L-CH	Same as above Fig. 3-2	Points between emitters of TR601 and TR602 F-2981	VR03 F-2980	DC 10mV \pm 1mV	o By turning VR03 and VR04 clockwise, the bias current is decreased gradually.
4.	Bias Current R-CH	Same as above Fig. 3-2	Points between emitters of TR601 and TR602 F-2981	VR04 F-2980	DC 10mV \pm 1mV	

(2) Power Meter Adjustments (See Fig. 2-3)

Note: 1. Master Volume Maximum

2. For this adjustment, run the unit for more than 2 minutes after turning on the power switch.

AUDIO OSCILLATOR		OUTPUT TERMINAL	ADJUST	ADJUST FOR
OUTPUT	CONNECTING POINT			
At 1 kHz Sine wave, set the amplifier-output to 20V on both channels by adjusting Audio Osc.-output level	Input terminal of Amplifier	Speaker terminal 8 Ω VTVM Scope	VR01 (L-CH) VR02 (R-CH) on F-2860	Set the point of power meter to 50W on both channels

Fig. 3-2

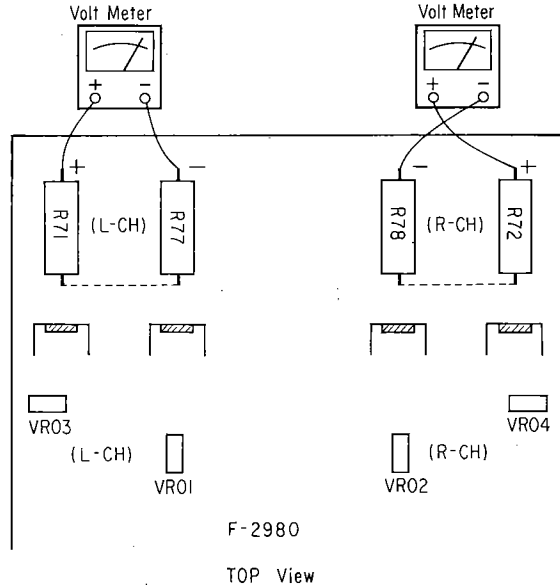


Fig. 3-3


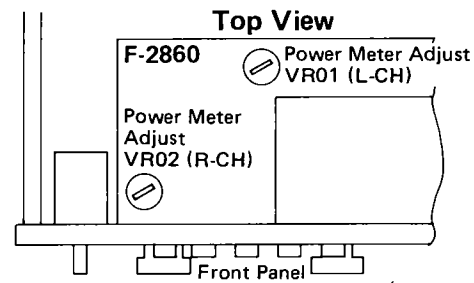


Fig. 3-4

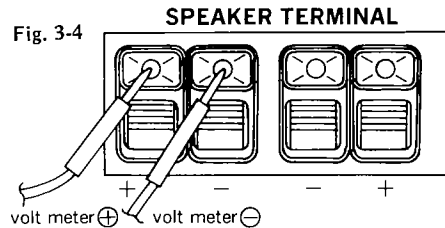


4. PARTS LOCATION & PARTS LIST

* Since some of capacitors and resistors are omitted from parts lists in this Service Manual, refer to the Common Parts List for capacitors & resistors which was appended previously to each Sansui Manual.

4-1. F-2614 RF Circuit Board (Stock No. 7522091)

Conductor Side

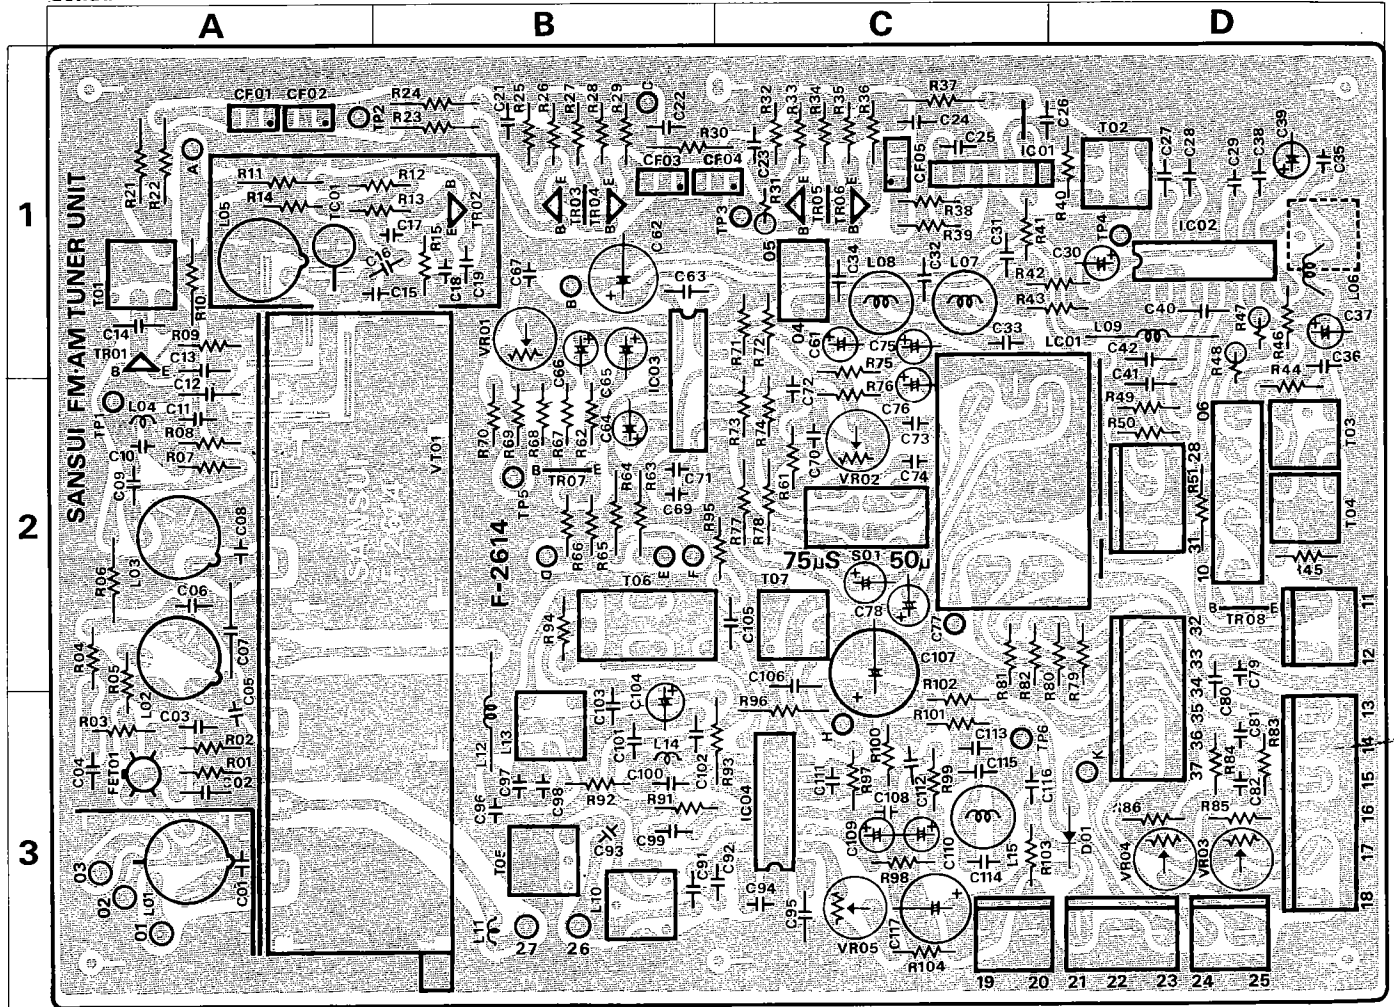


Parts List


Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
•Transistors											
TR01	0305801, 2	2SC1047 B, C	1A	C 16	0669295	10pF 50V C.C.	1B	T 02	4235930	10.7MHz IF Coil	2D
TR02	0305801, 2	2SC1047 B, C	1B	C 17	0669295	10pF 50V C.C.	1B	T 03	4235990, 1	FM IFT 10.7MHz	
TR03	0306341, 2	2SC1674 K, L	1B	C 18	0669295	10pF 50V C.C.	1D	T 04	4236000, 1	IF Coil 10.7MHz	2D
TR04	0306341, 2	2SC1674 K, L	1B	C 29	0661330	33pF 50V C.C.	1B	T 06	0910280	Ceramic Filter 455kHz	2B
TR05	0306341, 2	2SC1674 K, L	1C	C 65	0573159	1.5µF 35V T.C.	1B	T 07	4230620	IF Coil 455kHz	2C
TR06	0306341, 2	2SC1674 K, L	1C	C 67	0629005	360pF 50V P.C.	2C	CF 02	0910420	Ceramic Filter 10.7MHz	1A
TR07	0305731, 2	2SC711 E, F	2B	C 73	0620561	560pF 50V P.C.	2C	CF 03	0910420	Ceramic Filter 10.7MHz	1B
	0305951, 2	2SC945 Q, R		C 74	0620561	560pF 50V P.C.	3B	CF 04	0910420	Ceramic Filter 10.7MHz	1B, C
•ICs											
IC 01	0360120	µPC555H	1C	C 97	0669400	15pF 50V C.C.	3B	CF 05	0910420	Ceramic Filter 10.7MHz	1C
IC 02	0360350	HA1137W	1B	C 98	0669400	15pF 50V C.C.	3B				
IC 03	0360320	HA1196	1, 2B	C 98	0620361	360pF 50V P.C.		LC 01	0910360	Low Pass Filter	2C
IC 04	0360800	LA1240	3C	R 63	0200471	470Ω 1/2W N.I.R.		VR01	1034250	4.7kΩ VCO Adjust Volume	1B
•FET											
FET01	0370120, 1	3SK41 K, L	3A	L 01	4200720	Antenna Coil	2, 3A	VR02	1035190	100kΩ B MPX Separation Volume	2C
•Diode											
D 02	0311160	1S2473D		L 02	4210340	RF Coil	2A	VR05	1035110	4.7kΩ B AM Signal Meter Adjust Volume	3C
	0311180	1S1588		L 03	4210340	RF Coil	2A	S 01	1110270	De-emphasis Switch	
C 01	0669325	15pF 50V C.C.	3A	L 04	4900140	1µH Inductor	1A	VT01	1220260	AM-FM Variable Capacitor	2B
C 05	0669325	15pF 50V C.C.	2A	L 05	4220400	OSC Coil	1D	TC 01	1230090	Trimmer Capacitor	1A
C 08	0669325	15pF 50V C.C.	2A	L 06	4290300	Inductor	1C		2410570	5P Pin Ass'y Type D	
C 09	0669210	10pF 50V C.C.	2A	L 07	4900250	8.2µH Inductor	1C		2410850	4P Pin Ass'y Type B	
C 12	0679008	1pF 500V	1A, B	L 08	4900240	6.8µH Inductor	1D		2410860	6P Pin Ass'y Type B	
		Gimmic Capacitor		L 09	4290011	Choke Coil	3B		2410950	6P Pin Ass'y Type E	
C 15	0669330	20pF 50V C.C.	1A, B	L 11	4900100	3.3µH Inductor	2, 3B				
				L 12	4290011	Choke Coil					
				L 13	4220650	OSC Coil	3B				
				L 14	4900110	100µH Inductor					
				L 16	4900100	3.3µH Inductor					
				T 01	4235930	10.7MHz IF Coil	1D				

4-5. F-2980 Power Supply & Driver Circuit Board (Stock No. 7572181)

Conductor Side

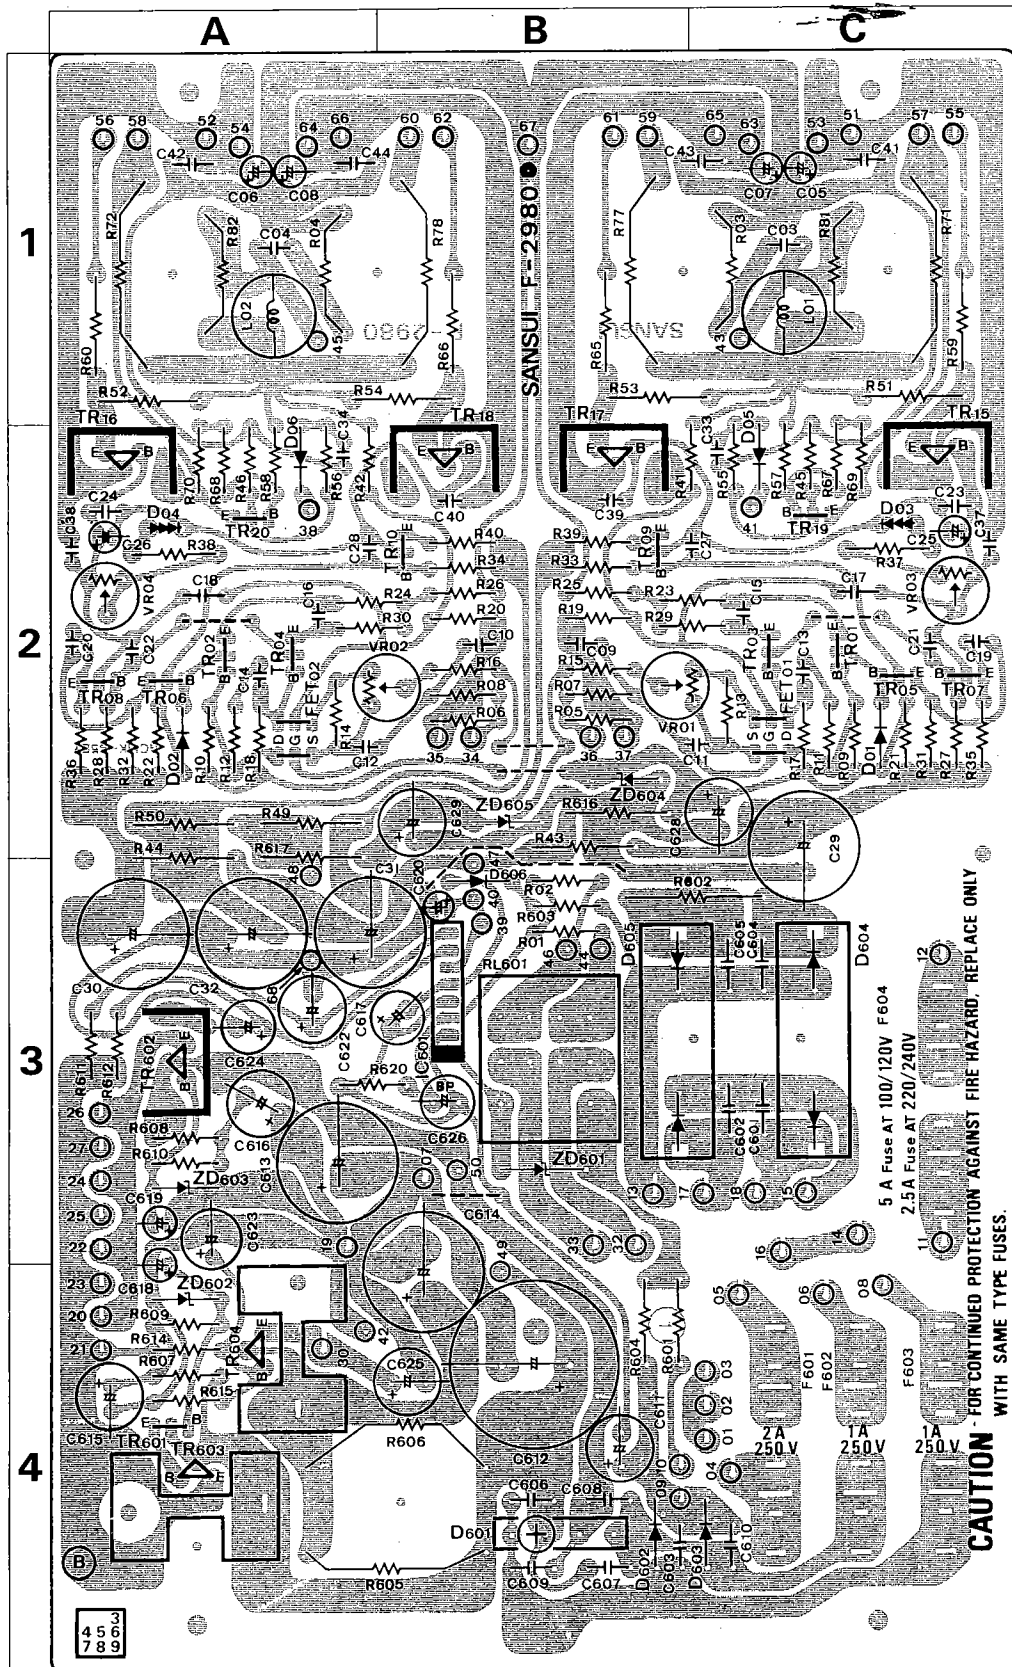

0. F-2854 Audio Muting Circuit Board

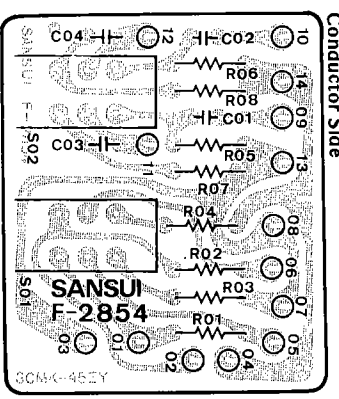


Conductor Side

Parts List

Parts No.	Stock No.	Description
C 01, 02	0620471	470PF 50V P.C.
S 01	.1131560, 1	Audio Muting Switch

2. F-2878 Balance Volume Circuit Board

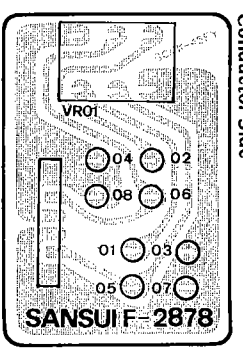


Conductor Side

Parts List

Parts No.	Stock No.	Description
VR01	1015320, 1	250K Ω x 2 Balance Volume

4-14. F-2981 Power Transistor Circuit Board

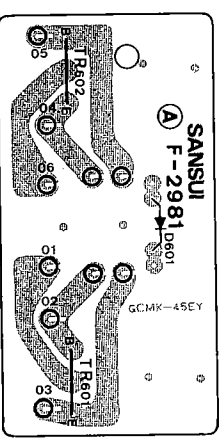

Conductor Side


Parts List

Parts No.	Stock No.	Description
*Transistors		
TR601	0301140, 1	2SA1108N1LB O, Y
TR602	0306810, 1	2SC2581N1LB O, Y
*Diode		
D 601	0340161, 2	STV-3H Y, G

Abbreviations

R.	: Carbon Resistor	E.C.	: Electrolytic Capacitor
R.	: Solid Resistor	BP.E.C.	: Bi-Polar Electrolytic Capacitor
R.	: Cement Resistor	C.C.	: Ceramic Capacitor
R.	: Metal Film Resistor	Mi.C.	: Mica Capacitor
R.	: Fusing Resistor	O.C.	: Oil Capacitor
R.	: Non-Inflammable Resistor	P.C.	: Polystyrene Capacitor
C.	: Mylar Capacitor	T.C.	: Tantalum Capacitor

4-11. F-2862 Indicator Circuit Board



Conductor Side


Parts List (Power Indicator Circuit)

Parts No.	Stock No.	Description
LD01	0319050	SG2-13C (Green) LED
LD02	0319060	SG2-12C (Red) LED

Parts List (FM Stereo Indicator Circuit)

Parts No.	Stock No.	Description
LD01	0319060	SG2-12C (Red) LED

4-13. F-2879 Master Volume Circuit Board




Conductor Side

Parts List

Parts No.	Stock No.	Description
VR02	1011160, 1	150K Ω x 2 Volume


● Figures

Pin Ass'y

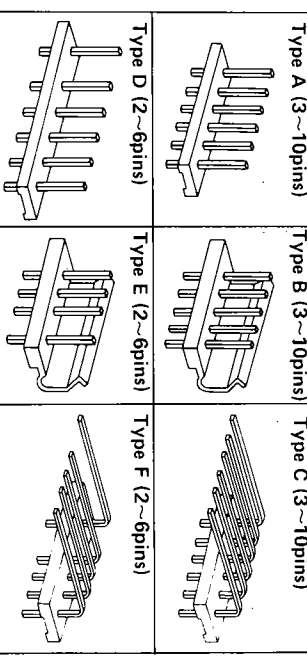


Note: Since stock number of female connectors (type B) with wires are not shown in each parts list, of Complete circuit board, please refer to the above parts list when ordering the connector.

Connectors

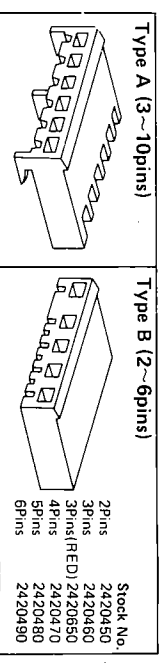


5. OTHER PARTS


5-1. Top View

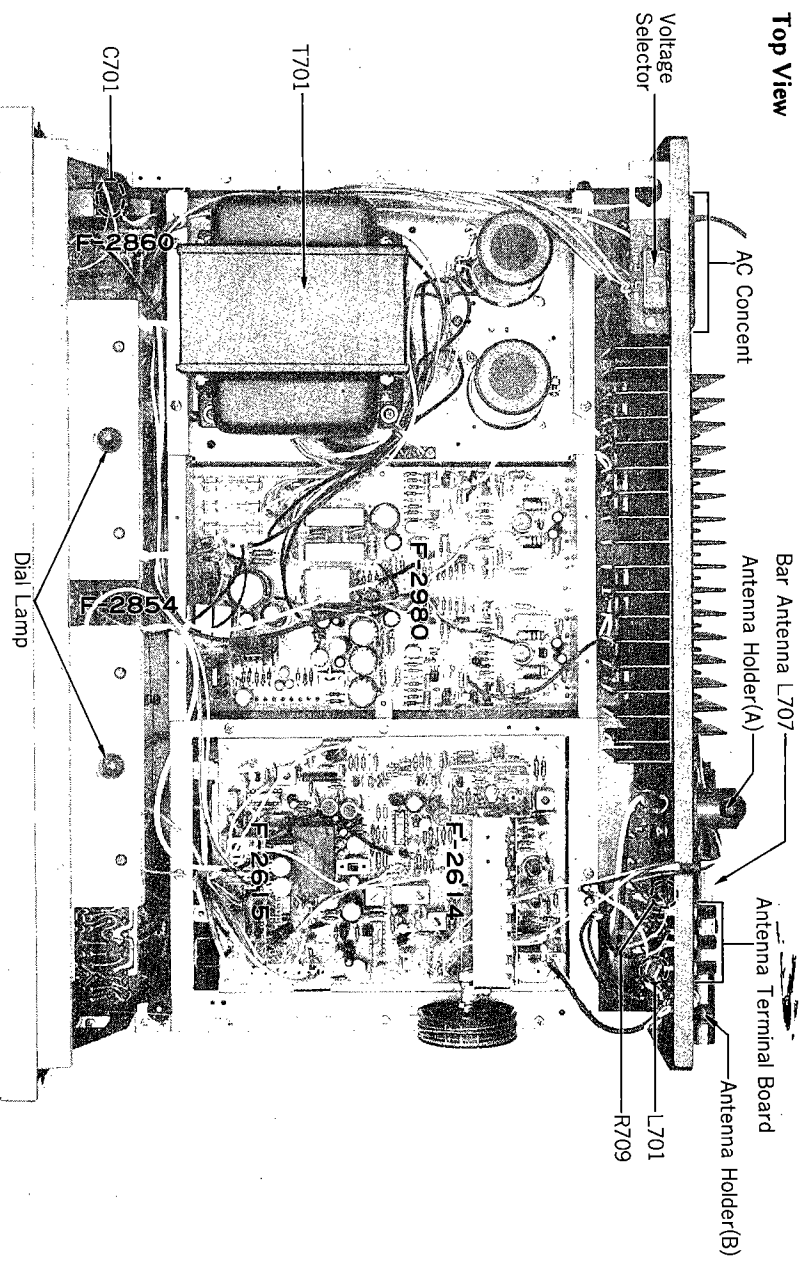

5-2. Bottom View

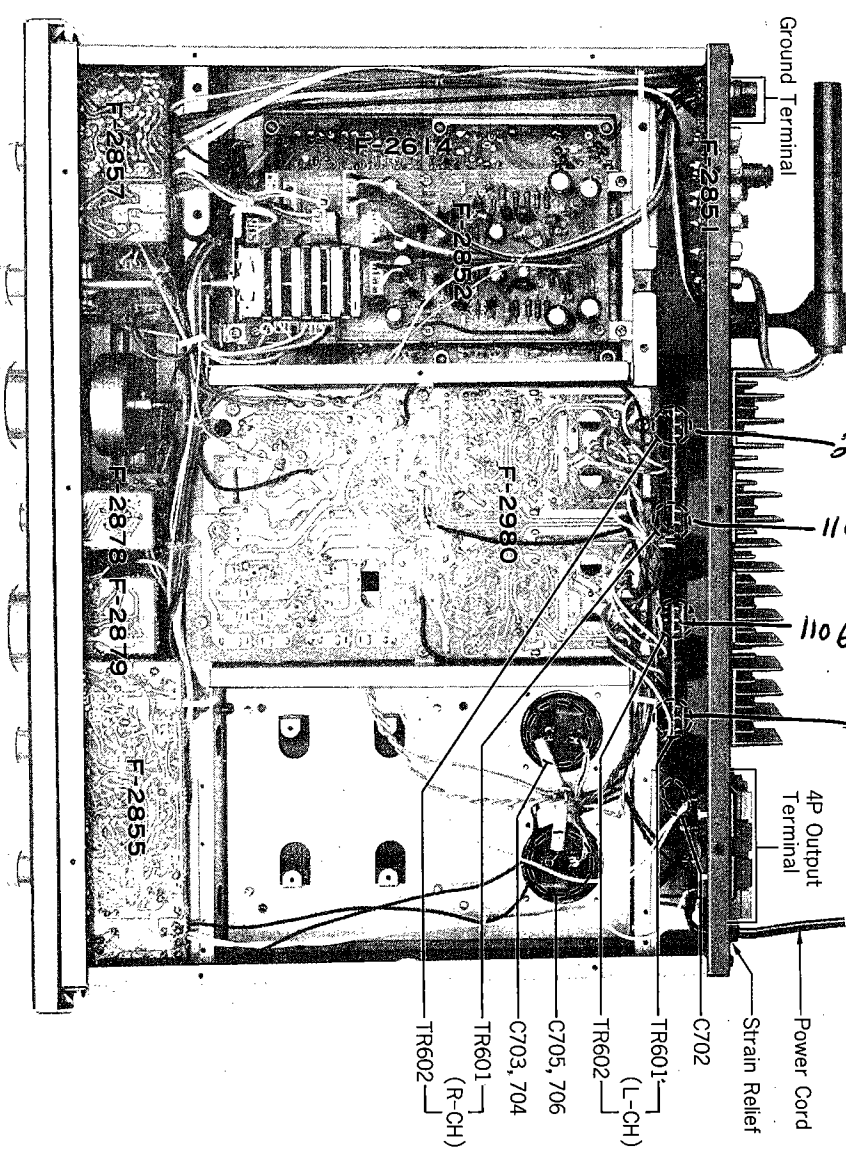

3. Front View

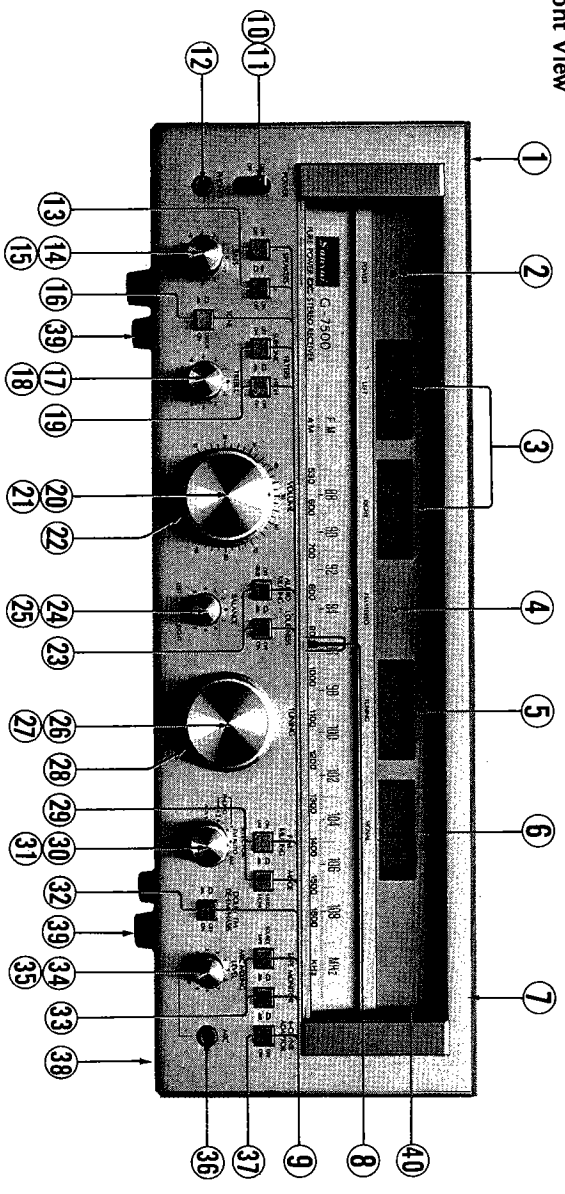

Parts List <<Front View>>

Parts No.	Stock No.	Description
1	5172132	Wood Bonnet
2	0319050	Power Indicator, LED (Green)
3	4301280, 1	Power Meter
4	0319060	FM STEREO Indication, LED (Red)
5	4301240	Tuning Meter
6	7008990	Signal Meter
7	5408301	Front Panel Assy
8	5048111	Front Glass
9	5396320	Masking Plate
10	5517270	Front Panel Retainer
11	5280020	Masking Packing
12	7116090	Dial Pointer Assy
13	5326690	Push Switch Knob
14	1172000	Power Switch
11	5296701	Knob, power switch
12	2430400	Phone Jack
13	1131980, 1	Speaker Switch (A) (B)
14	1015360, 1	Bass Volume, 100K Ω x 2 (C)
15	5319081	Knob, bass volume
16	1131630, 1	Tone Switch
17	1015360, 1	Treble Volume, 100K Ω x 2 (C)
18	5319091	Knob, treble volume
19	1131630, 1	Subsone & Filter Switch
20	1011160, 1	Volume, 150K Ω x 2 (B)
21	5319181	Knob, volume
22	5286194	Volume Grille
23	1131520	Audio Muting & Loudness Switch
24	1015320	Balance Volume, 250K Ω x 2 MN
25	5319122	Knob, balance volume
26	7036620	Tuning Unit Assy
27	5319172	Knob, tuning unit ass'y
28	5296194	Grille, tuning unit ass'y
29	1131600, 1	FM Muting & Mode Switch
30	1103690	Selector
31	5319101	Knob, selector
32	1131620, 1	Dolby, FM Deemphasis Switch
33	1131610, 1	Tape Monitor Switch (1), (2)
34	1009270, 1	Mic Mixing/Volume
35	5319122	Knob, mic mixing volume
36	2430400	Mic Jack
37	1131610, 1	4-CH/VR Adaptor Switch
38	5028891	Bottom Plate
39	5316821	Leg
40	5408390	Dial Glass

Parts List <<Top & Bottom View>>



Parts No.	Stock No.	Description
C 705	0559849	10000 μ F 71V E.C.
C 706	0602109	1 μ F 100V M.C.
R 701	0119335	3.3M Ω 1/2W S.R.
R 709	0103122	1.2K Ω 1/2W C.R.
L 701	4280021	Antenna Transformer
L 702	4200830, 1	Bar Antenna
T 701	4002770	Power Transformer
PL 701, 702	0400650	Dial Lamp, 8V 0.3A
2410830		Voltage Selector Socket
2410091		Voltage Selector Plug
5286460		Antenna Holder (1) (A)
5286480		Antenna Holder (2) (B)
2210310		Antenna Terminal Board
2230190		Ground Terminal
2450070		AC Concent
2450070		AC Concent
2290190		4P Output Terminal
3800470, 1		Power Cord
3810480		Strain Relief

Replacement of Power Transistors Procedure

1. Remove the bonnet.
2. Take the bottom plate off.
3. Loosen screws then slide rear panel upward.
4. Loosen screws fixing circuit board F-2981 on the heat sink.
5. Remove power transistor from circuit board F-2981.

6. THREADING OF DIAL CORD

*If a dial cord is cut off or slips, replace it by following procedures. As this unit uses 0.5 mm ϕ cord, please replace it with the same type certainly. *The length of dial cord is approximately 170cm (66.9 inch).

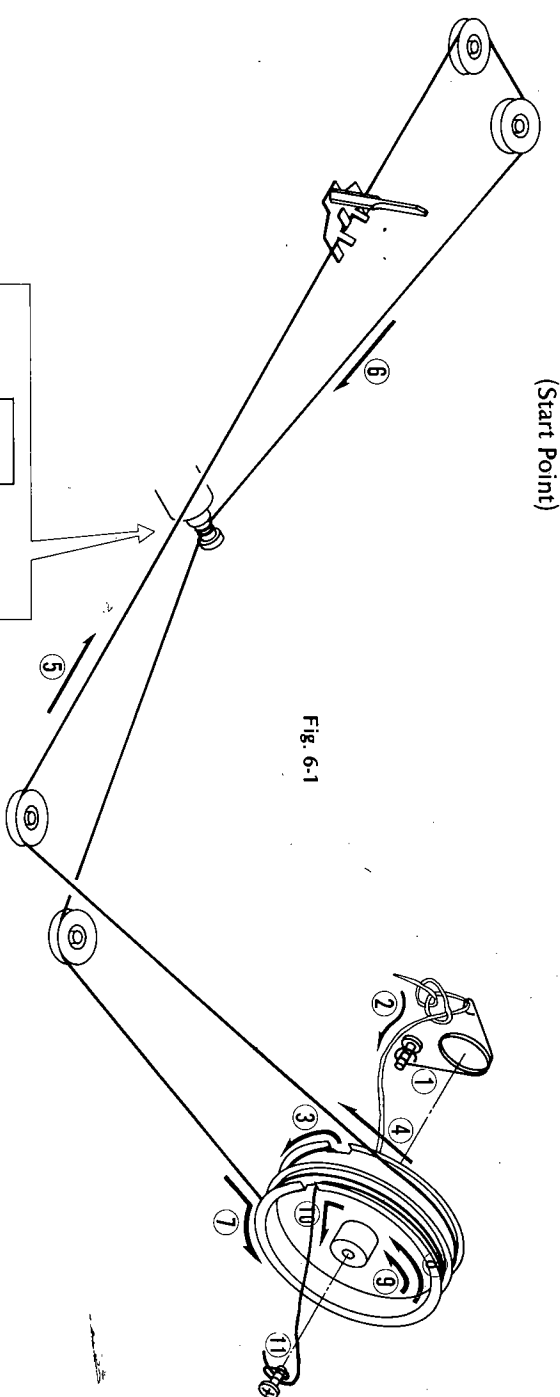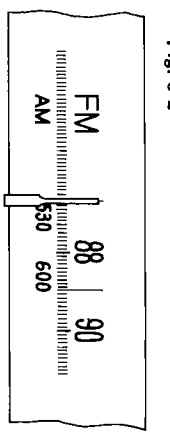

Threading of Dial Cord

Thread the dial cord in numerical order from 1 to 11 as Fig. 6-1. *Close the variable capacitor completely.


Stock No.	Description
6036050	Dial Cord (0.5 mm ϕ)
6146681	Dial pulley

Attachment of Dial Pointer

1) Close the variable capacitor completely.
2) Set the dial pointer to the start point, the line at the left edge of the dial scale. (Fig. 6-2).
*Confirm that the dial pointer runs smoothly on the dial scale by turning the tuning shaft.

SANSUI G-7500 SCHEMATIC DIAGRAM

La présentation de nos spécifications sont susceptibles d'être modifiées sans préavis par suites d'améliorations éventuelles.
 Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 Design and specifications subject to change without notice for improvement.

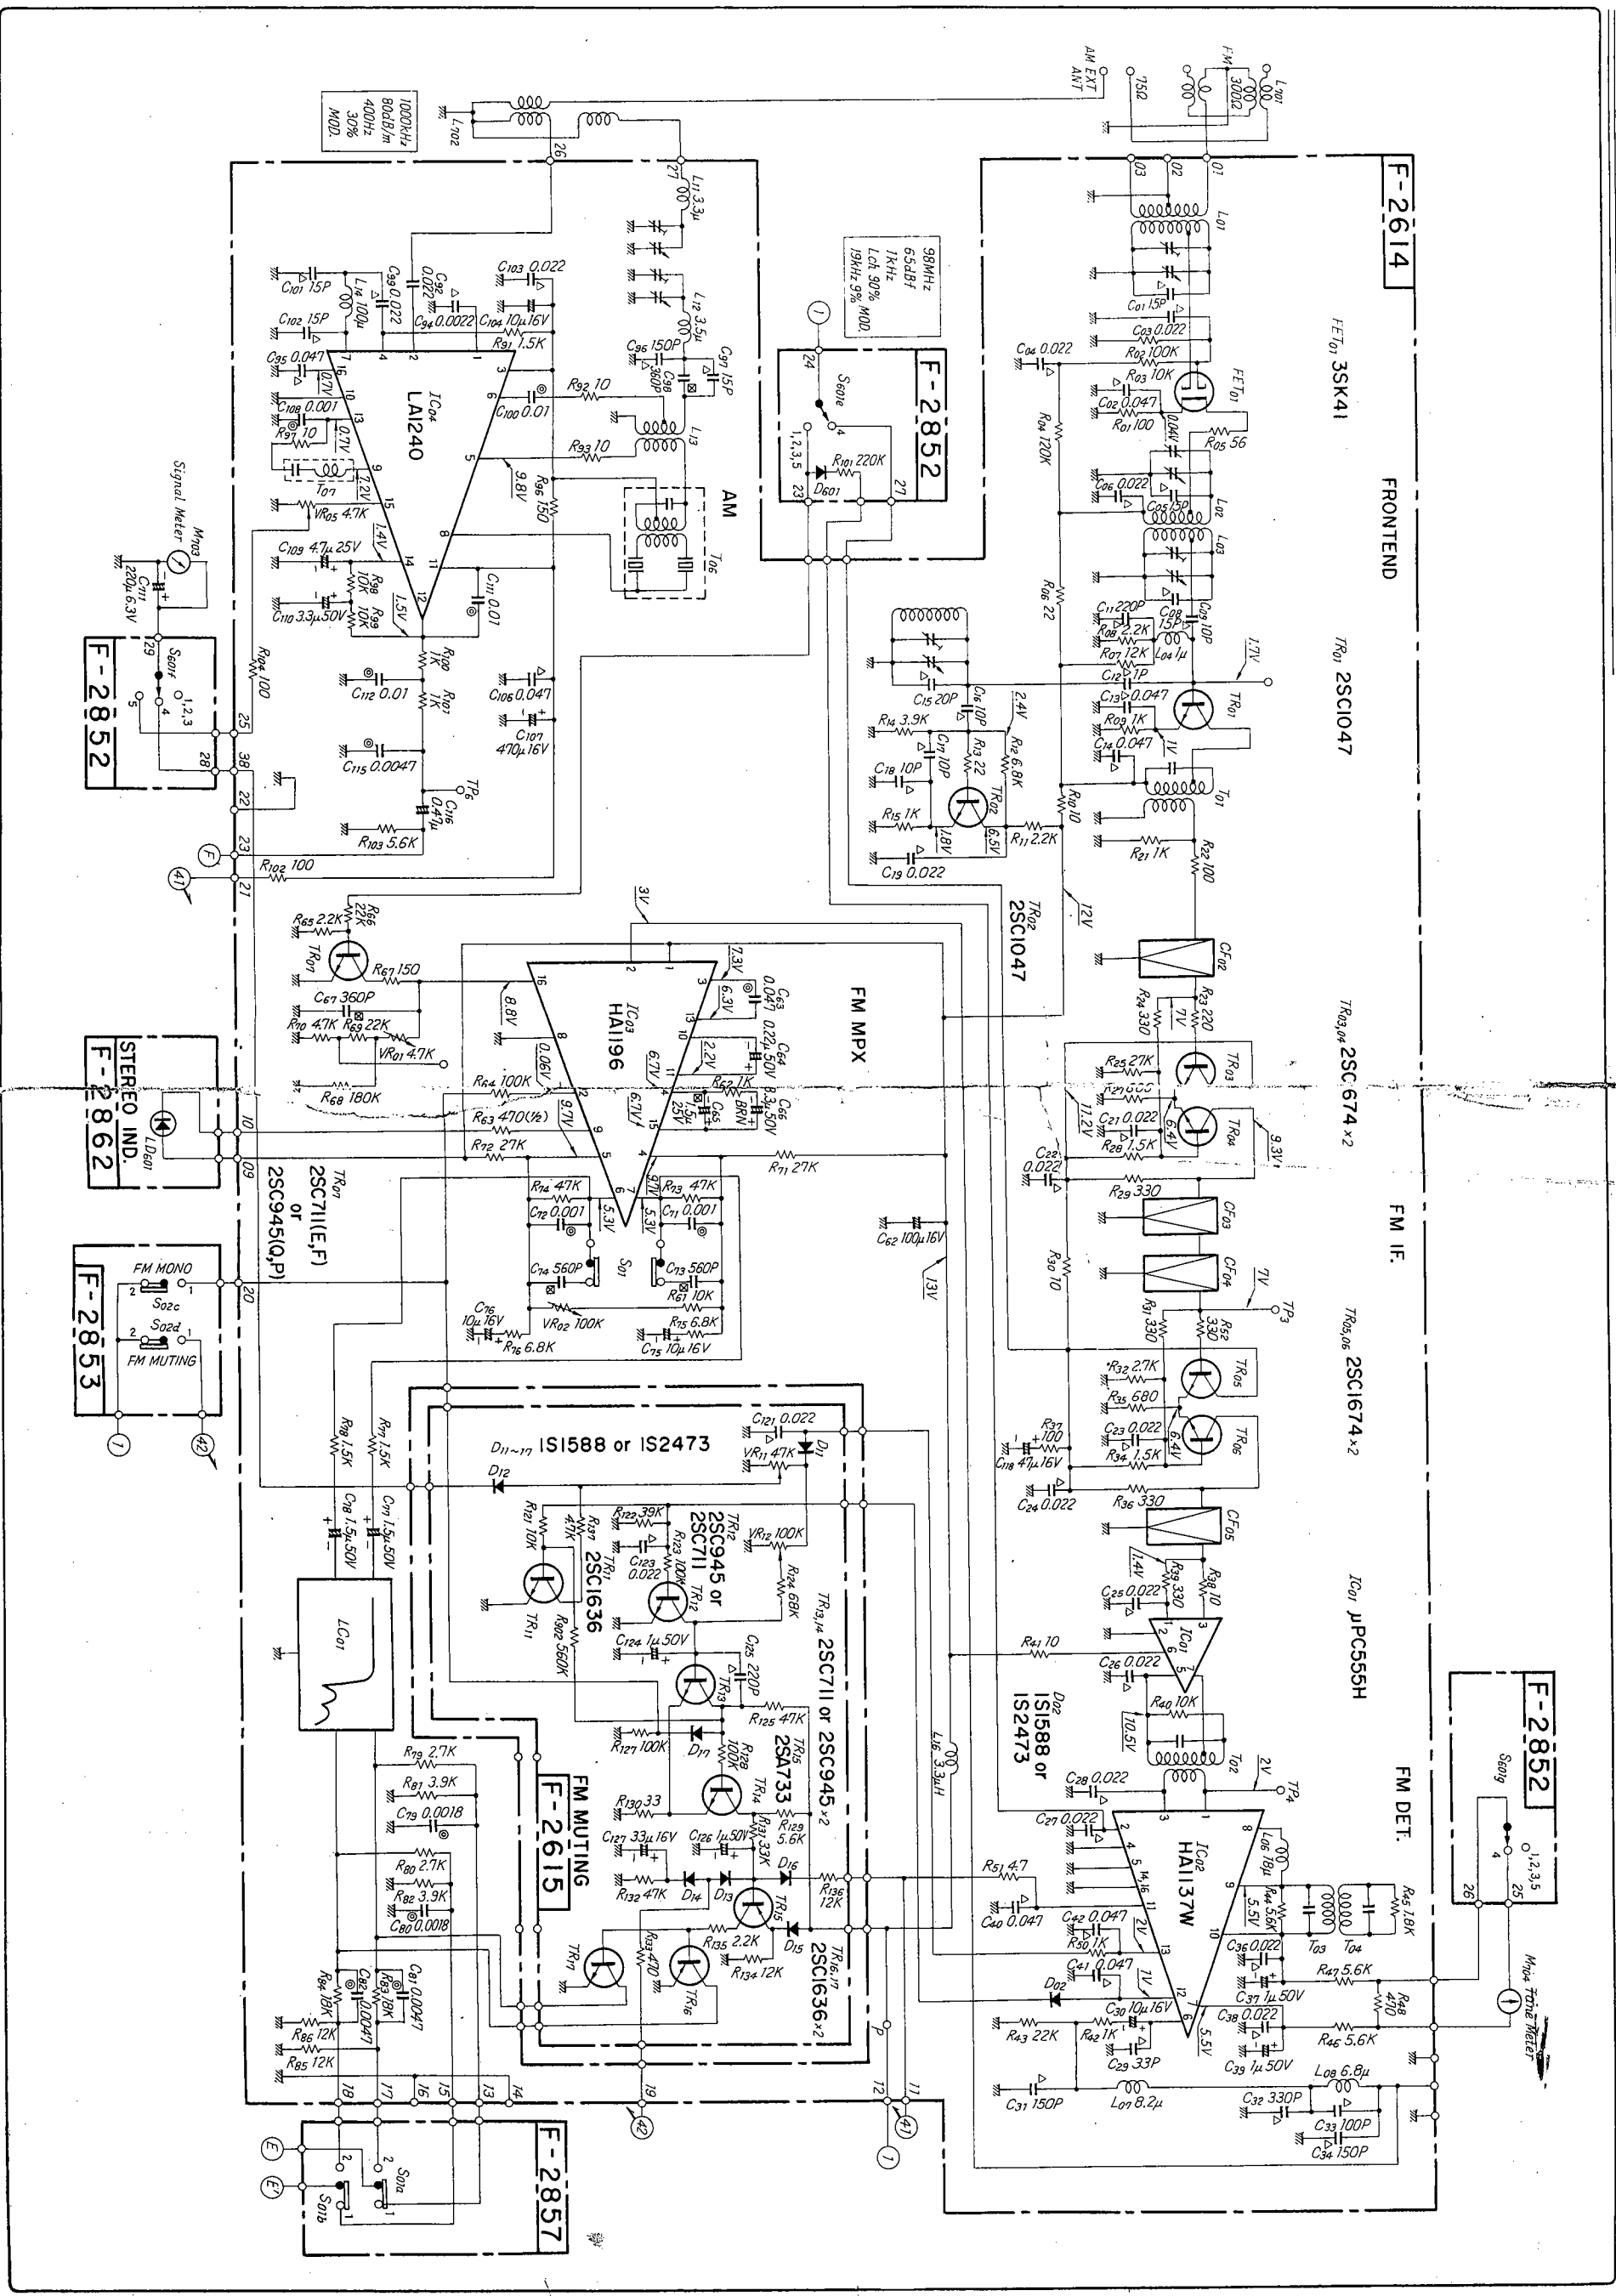


8. PACKING LIST

Parts No.	Stock No.	Description
1	9116810	Vinyl Cover
2	9028260	Stylofoam Packing (Upper)
3	9028270	Stylofoam Packing (Lower)
4	9001630	Carton Case
5	5996080	Curl Stopper

9. ACCESSORY PARTS LIST

Stock No.	Description
9204420	Operating Instructions
9237900	Schematic Diagram
2410560	Short Pinplug 2 pcs.
3820100	FM Antenna

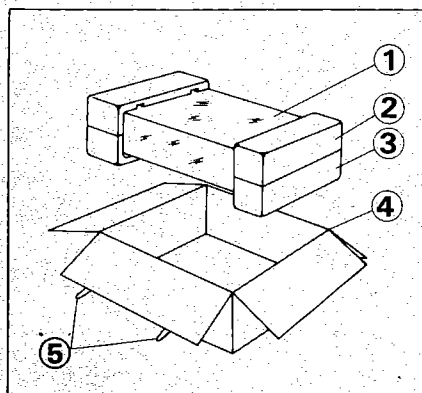

MEMO



SANSUI ELECTRONICS CORPORATION: 55-11 Queens Blvd. Woodside, N.Y. 11377 U.S.A.
 333 West Alondra Blvd. Gardena, California 90247 U.S.A.
 3036 Koapaka St. Honolulu, Hawaii 96819 U.S.A.
 SANSUI AUDIO EUROPE N.V.: North Trade Bldg (9th floor) Noorderlaan 133-Bus 1, 2030 Antwerp, Belgium
 SANSUI AUDIO EUROPE S.A.: Arabella center, 6 Frankfurt AM Main, Lyoner Strasse 44-48, West Germany
 SANSUI ELECTRIC COMPANY LTD.: 14-1, Izumi 2-chome, Suginamiku, Tokyo 168 Japan PHONE: (03) 323-1111/TELEX:232-2076

SM113

Printed in Japan (O88230M)

130- 50 75

