

JVC

SERVICE MANUAL

MODEL
JR-S301
DC INTEGRATED RECEIVER



No. 2434
DEC. 1977

Contents

	Page
1. Specifications	2
2. Level Diagram	2
3. Removal Procedures	
3-(1) Top Cover and Bottom Plate	3
3-(2) Front Panel and Window Screen	4
3-(3) Pushbuttons	5
3-(4) TXX-112-1 P.C. Board Ass'y	5
4. Main Parts Location and Part Numbers	6
5. Exploded Views and Part Numbers	
5-(1) Front Panel	7
5-(2) Rear Panel	8
6. Dial Stringing Procedures	9
7. FM/AM Tuner Alignment Procedures	
7-(1) FM Section	10
7-(2) AM Section	11
8. Power Amplifier Adjustment Procedures	
8-(1) Center Voltage	12
8-(2) Idling Current	12
9. Printed Circuit Board Ass'y and Parts List	
9-(1) TXX-112A Audio P.C. Board Ass'y	13
9-(2) TXX-113A Equalizer Amp., Switches and Indicator P.C. Board Ass'y	18
9-(3) TXX-117A (or TXX-130A) AC Block P.C. Board Ass'y	21
9-(4) TAC-488A S.E.A. (Sound Effect Amp.) P.C. Board Ass'y	22
9-(5) TFM914GUA1 FM/AM Tuner P.C. Board Ass'y	25
10. JR-S301 Schematic Diagram	30
11. Packing Materials and Part Numbers	32
12. Accessories List	32
13. Parts List with Specified Numbers for Designated Areas	Back page

Warning:
When replacing the parts marked with \triangle , be sure to use the designated parts to ensure safety.

1. Specifications

Dimensions	: 166 mm(H) x 500 mm(W) x 378 mm(D) (6-9/16" x 19-3/4" x 14-15/16")
Weight	: 12.4 kg (27.3 lbs.)
Amplifier Section	
Output power	: 60 watts per channel, min. RMS, both channels driven, into 8 ohms from 20 Hz to 20 kHz, with no more than 0.03 % total harmonic distortion 65 watts per channel into 8 ohms (1 kHz, THD 0.03 %) 80 watts per channel into 4 ohms (1 kHz, THD 0.03 %)
THD at half rated power, 1 kHz, 8 Ω	: 0.008 %
Intermodulation Distortion	: 0.01 % at rated output
Damping Factor	: 70 at 8 ohms/1 kHz
Load Impedance	: 4 – 16 ohms
Input Sensitivity (Impedance)	: PHONO: 2.5 mV (47k ohms) AUX: 190 mV (50k ohms) TAPE PLAY (pin/DIN): 190 mV (50k ohms)
Signal-to-Noise Ratio (IHF Short-Circuit A Network)	: PHONO: 75 dB AUX: 95 dB TAPE: 95 dB
Recording Output	: Pin: 190 mV DIN: 30 mV (80k ohms)
Frequency Response	: 5 Hz – 40 kHz + 0.0 dB, -1.0 dB
Phono Equalizer Deviation	: ±0.2 dB from 20 Hz to 20 kHz
Phono Overload	: 190 mV (RMS) (THD 0.03 %)
S.E.A. Center Frequencies	: 40, 250, 1 k, 5 k, 15 kHz
S.E.A. Control Range	: ±12 dB
FM Tuner Section	
Usable Sensitivity*	: 10.8 dBf (1.0 μV/75 Ω, 1.9 μV/300 Ω)
50 dB Quieting Sensitivity	: MONO: 14.8 dBf (3.0 μV/300 Ω) STEREO: 37.3 dBf (39.7 μV/300 Ω)
Stereo Separation (at REC OUT)	: 50 dB (1 kHz) 40 dB (50 Hz – 10 kHz)
Distortion	: 100 Hz: 0.1 % (Mono) 0.1 % (Stereo) 1 kHz: 0.08 % (Mono) 0.1 % (Stereo) 6 kHz: 0.15 % (Mono) 0.4 % (Stereo)
Signal-to-Noise Ratio (IHF weighted)	: MONO: 78 dB STEREO: 70 dB
Alternate Channel Selectivity	: 80 dB
Capture Ratio	: 1.0 dB
Image Response Ratio	: 55 dB at 98 MHz
IF Response Ratio	: 80 dB at 98 MHz
AM Suppression	: 65 dB
Frequency Response	: 20 Hz – 15 kHz + 0.3 dB, -0.8 dB
AM Tuner Section	
Sensitivity	: 290 μV/m (Bar Antenna) 30 μV (Ex. Antenna)
Selectivity ± 10 kHz	: 50 dB
Signal-to-Noise Ratio	: 55 dB

* Figures in () are based upon '58 IHF standard. Specifications subject to change without notice.

2. Level Diagram

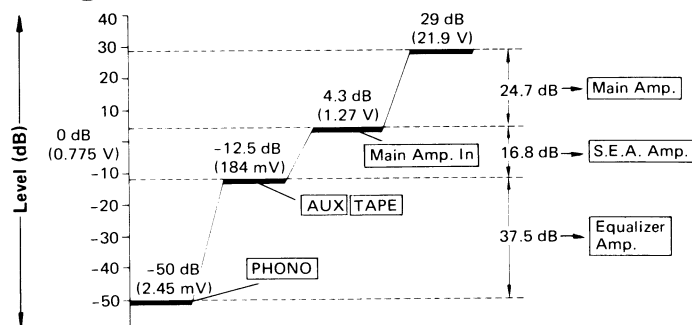


Fig. 1

3. Removal Procedures

3-(1) Top Cover and Bottom Plate

Procedure

1. Remove 4 screws (Item No. 5) and also 4 screws (Item No. 6) through the both sides of the cover and 3 screws (Item No. 7) from the back of the top cover. See Fig. 2.
2. Remove the top cover.

Note: When removing the top plate (Item No. 1) only, remove 7 screws (Item No. 4, No. 7).

3. Remove 4 screws (Item No. 10) from the bottom plate (Item No. 11) and remove it from the chassis.

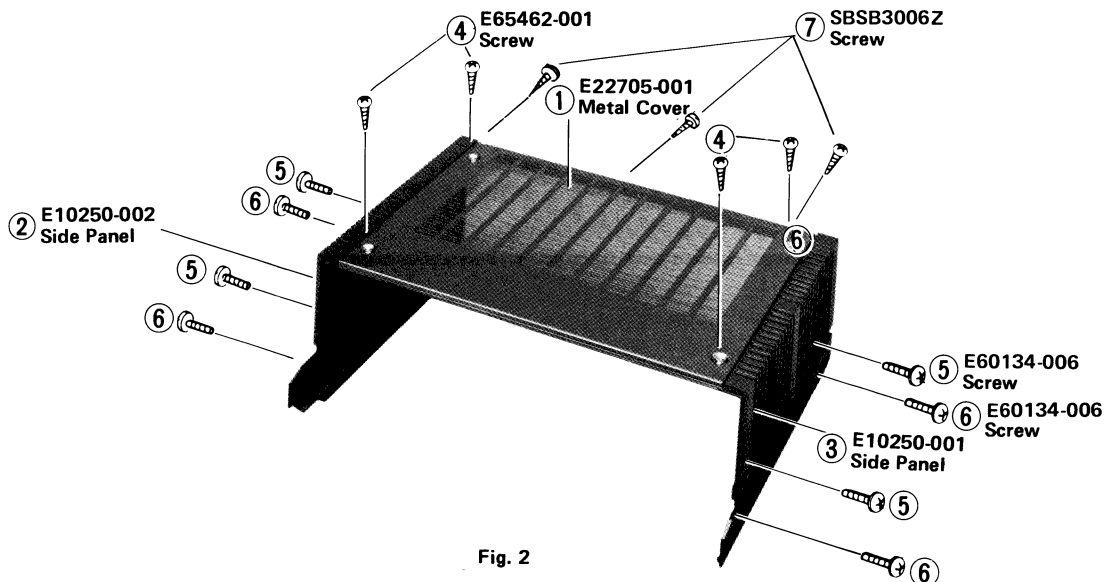


Fig. 2

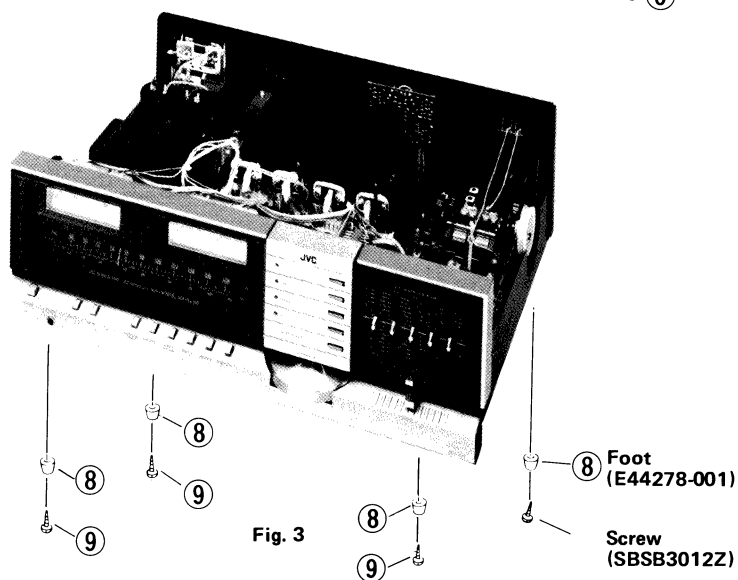


Fig. 3

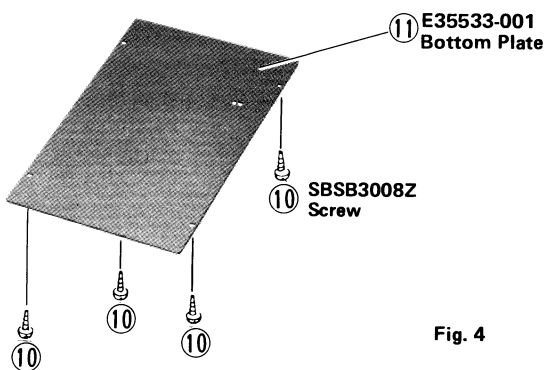


Fig. 4

3-(2) Front Panel and Window Screen

Procedure (Front Panel)

1. Remove 4 screws (Item No. 12) from the both sides of chassis and remove 3 screws (Item No. 14) from the bottom. See Fig. 6.
2. Remove 2 screws (Item No. 13) from the "L" typed brackets (Item No. 15, 16).

Procedure (Window Screen)

1. Remove 3 screws (Item No. 17) and a holder (Item No. 18).
2. Remove a window screen (Item No. 19).

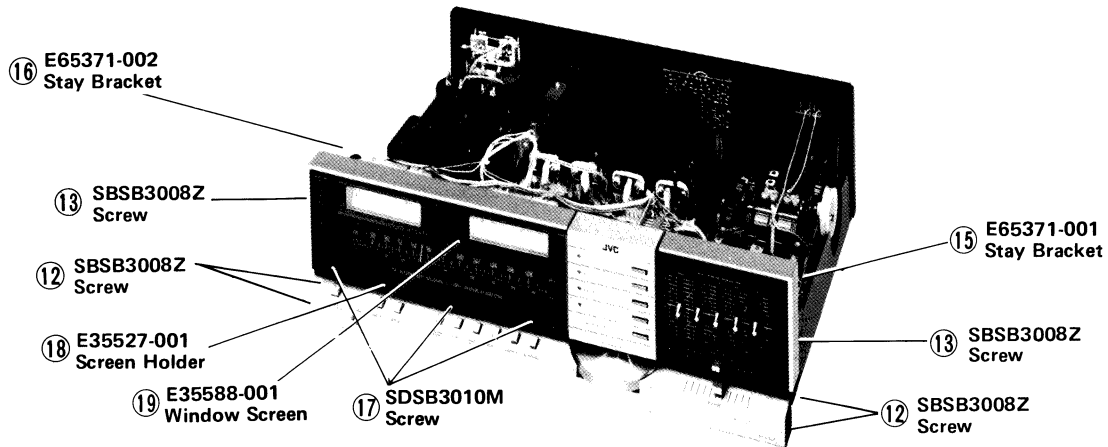


Fig. 5

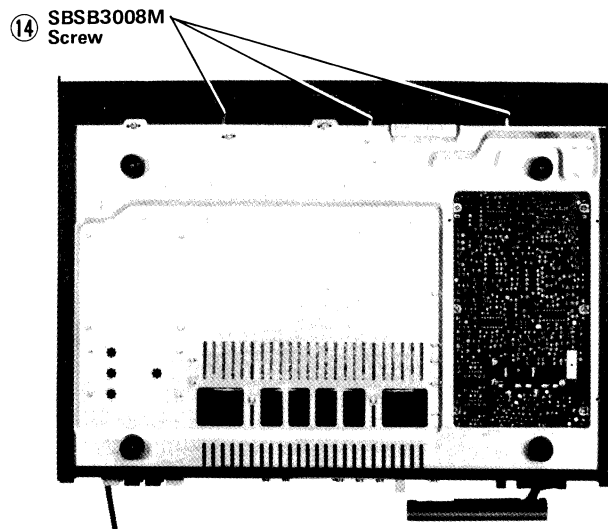


Fig. 6

3-(3) Pushbuttons

Procedure (Functions)

1. Remove "E" typed ring (Item No. 36) and a shaft (Item No. 35) from the button holder (Item No. 34) carefully.
2. Pushbuttons will be removed. Refer to Fig. 7A.

Procedure (Source)

1. Remove a nut (Item No. 41) and a source panel (Item No. 42) from the front panel.
2. Remove the escutcheons (Item No. 37).
3. Squeeze the both ends of escutcheon then, pull out the pushbuttons (Item No. 38) slightly. Refer to Fig. 7B.

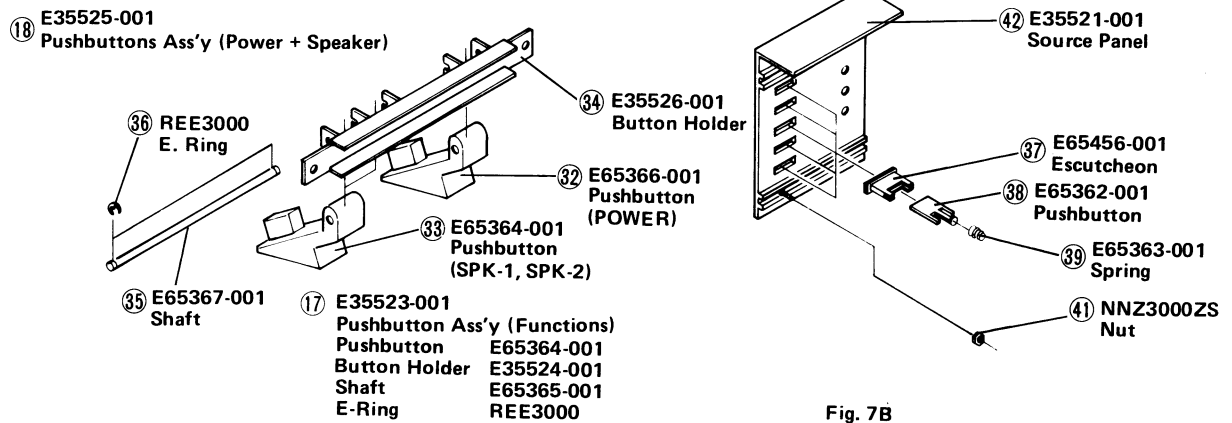


Fig. 7A

Fig. 7B

3-(4) TXX-112-1 P. C. Board Ass'y

Procedure

1. Remove 2 screws (Item No. 43) from the bottom chassis.
2. Remove 4 screws (Item No. 44) from both sides of a heat sink bracket.
3. Remove 2 fasteners (Item No. 45) located on TXX-112 P.C. Board Ass'y.
4. Remove TXX-112 with the heat sink and place it carefully as shown in Fig. 8.

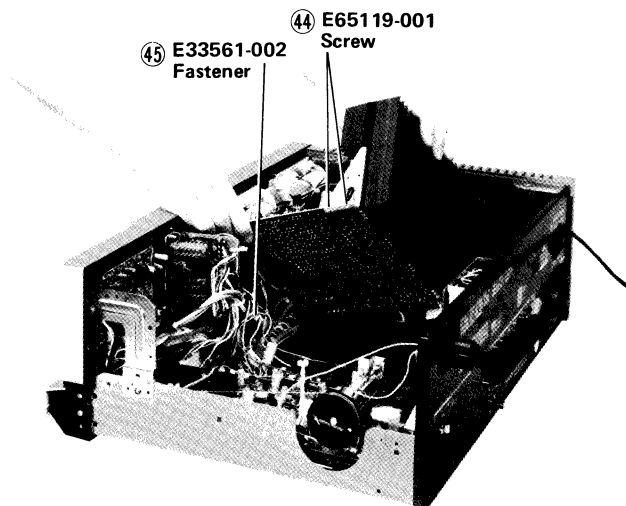


Fig. 8

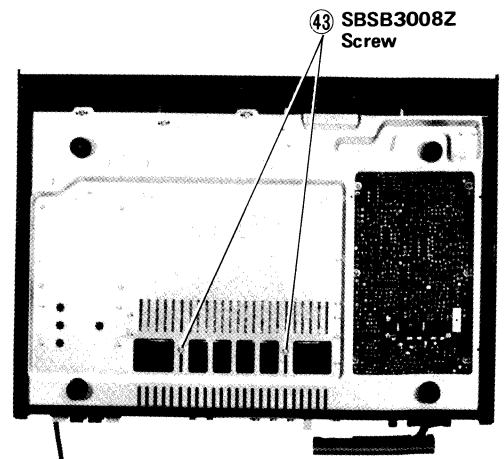


Fig. 9

4. Main Parts Location and Part Numbers

Top View

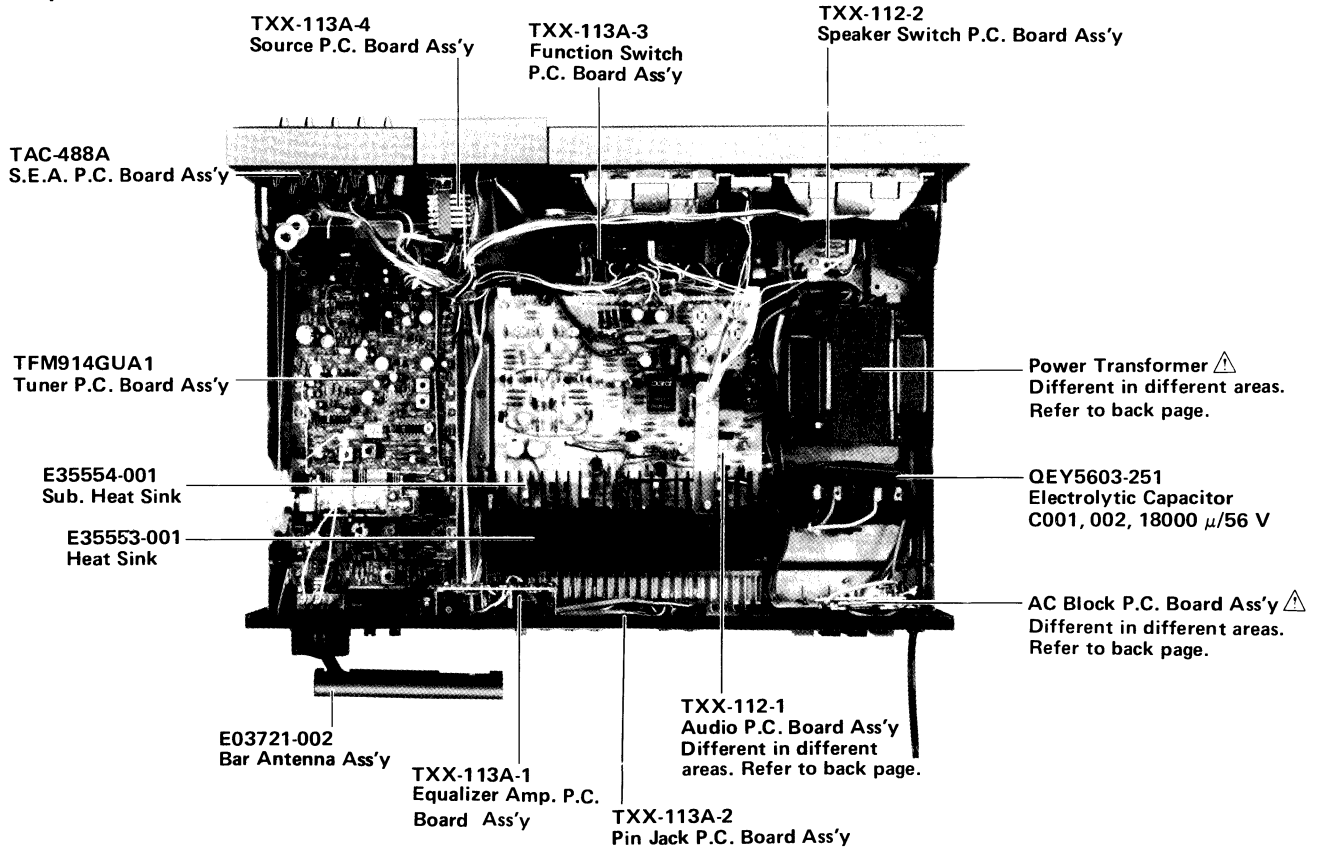


Fig. 10

Bottom View

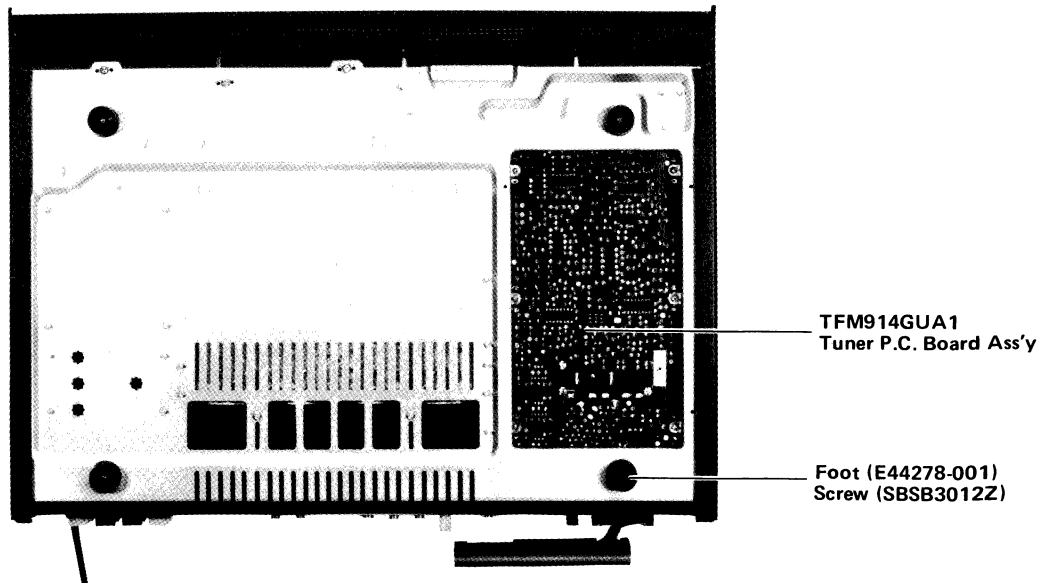


Fig. 11

NOTE: \triangle SAFETY PARTS

5. Exploded Views and Part Numbers

5-(1) Front Panel

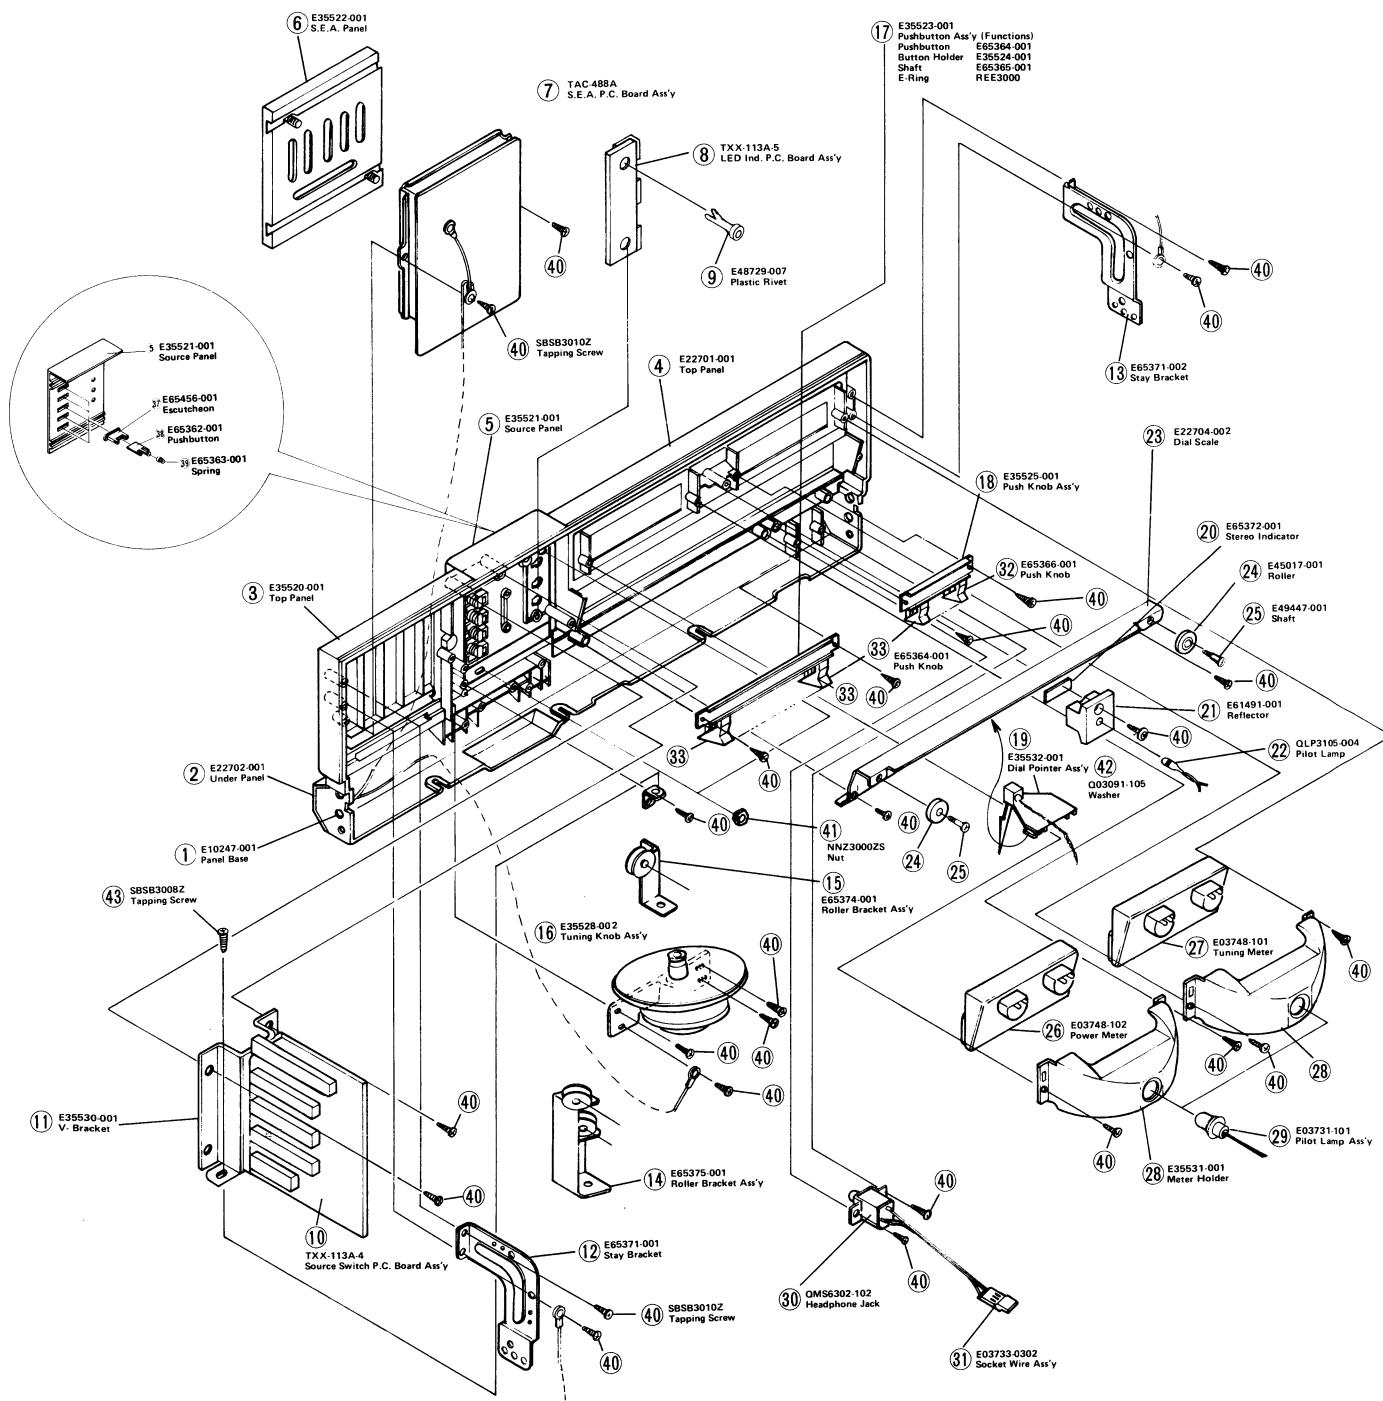


Fig. 12

5-(2) Rear Panel

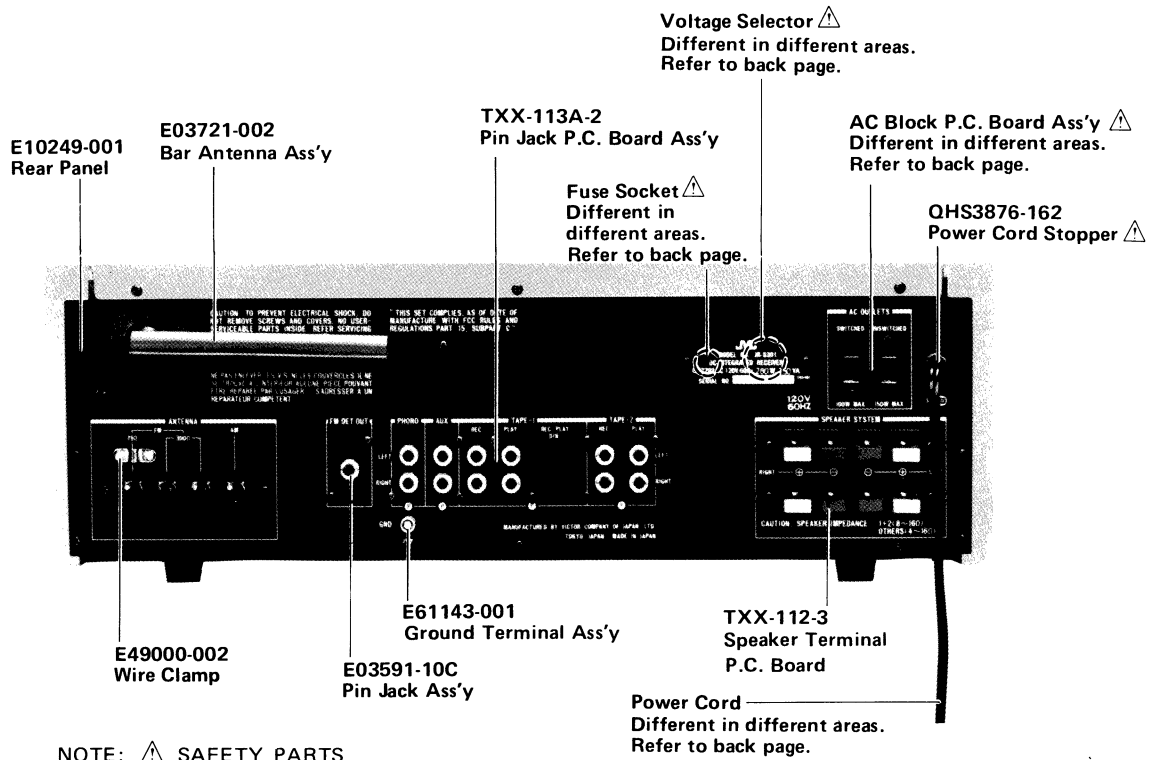


Fig. 13

6. Dial Stringing Procedures

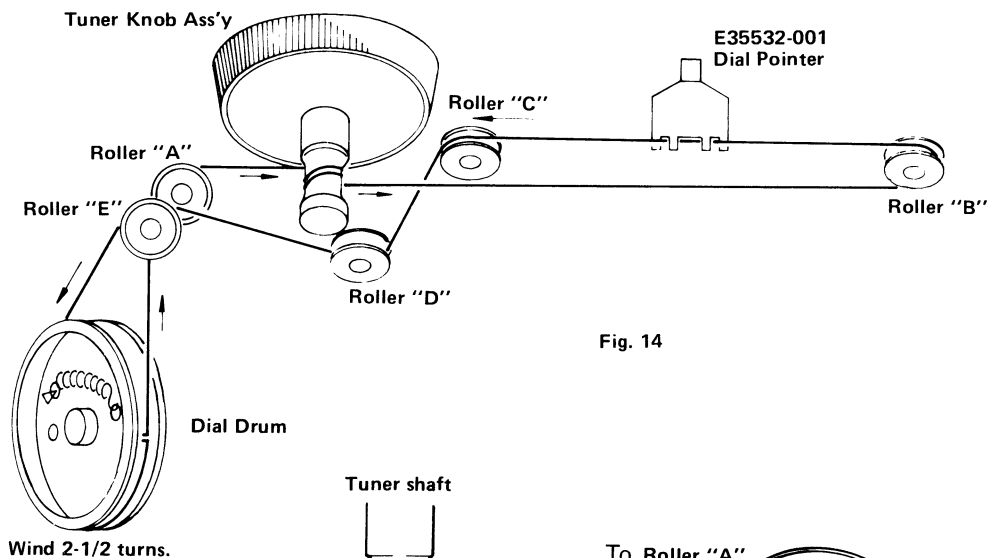


Fig. 14

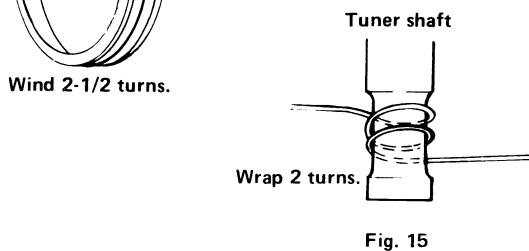


Fig. 15

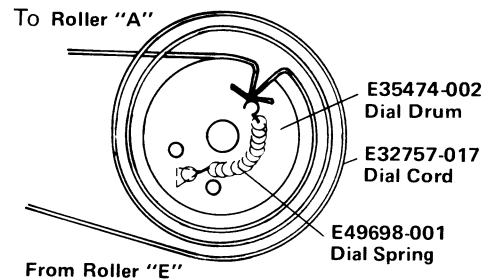


Fig. 16

Procedure

1. Remove the dial pointer and the old cord.
2. Tie end of new dial cord to one end of dial spring. Connect other end of dial spring of bottom right eye inside dial drum. See Fig. 16.
3. Rotate tuning capacitor dial drum to its maximum clockwise.
4. Run the dial cord through the slot in the rim of the dial drum.
5. Guide the dial cord under and around roller "A".
6. Pull the dial cord taut and wrap 2 turns clockwise. See Fig. 15.
7. Guide the dial cord under and around roller "B", "C" and "D". Keep the dial cord taut during this procedure.
8. Guide the dial cord over the dial drum and wind 2-1/2 turns clockwise. See Fig. 16.
9. Guide the dial cord over and around roller "E".
10. Turn the tuning shaft to rotate the dial drum fully counterclockwise and fully clockwise to distribute the tensioning along the dial cord.
11. Place the dial cord over and under the tabs on the rear of the dial pointer and place the dial pointer on the top of the dial panel rail. See Fig. 14.
12. Turn the tuning shaft clockwise. Slide the dial pointer to ZERO (0) calibration marker on the logging scale while holding tuning shaft fully clockwise. Cement the dial pointer to dial cord to prevent slippage. Allow cement to dry thoroughly.
13. Replace the top (Metal) cover.

7. FM/AM Tuner Alignment Procedures

TFM914GUA1 FM/AM Tuner P.C. Board Ass'y

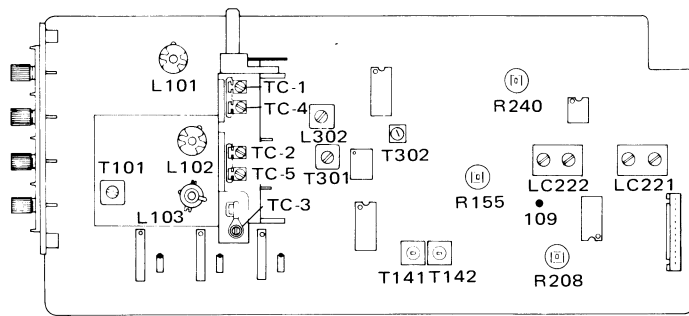


Fig. 17

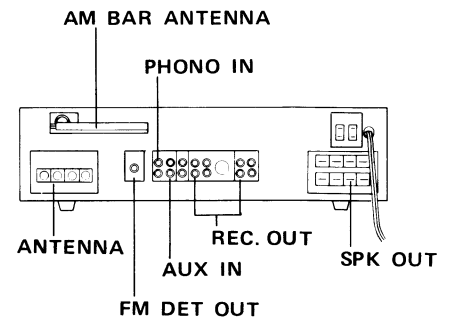


Fig. 18

7-(1) FM Section

Discriminator, FM Tuning Meter and Distortion

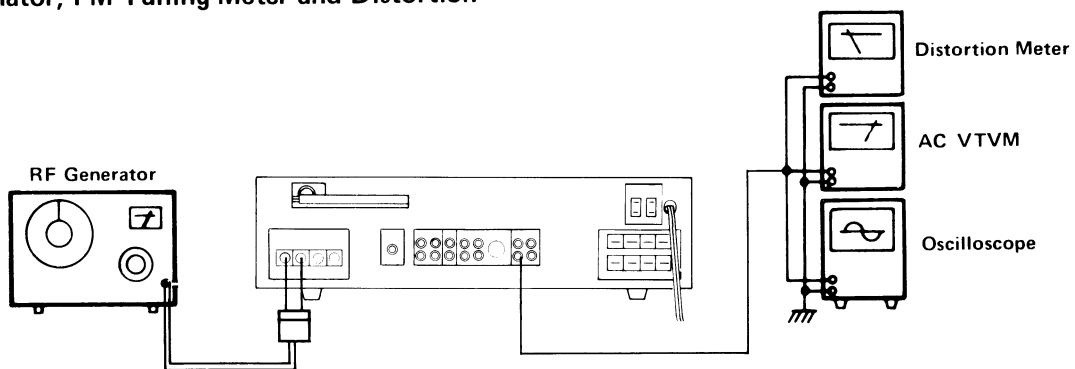


Fig. 19

1. Connect an RF generator, 400 Hz modulation and 75 kHz deviation, to the antenna terminals on the rear panel through a dummy antenna.
2. Connect an oscilloscope, distortion meter and VTVM to the Rec. Out Jacks on the rear panel.
3. Tune to a frequency where there is no broadcasting.
4. Adjust the core of T141 so that the FM Tuning Meter deflects to the center position.
5. Set the generator to 98 MHz.
6. Tune to 98 MHz signal.
7. Adjust the core of T142 so that the distortion is minimized.

Tracking and Sensitivity

Precaution: No adjustment is required. The tracking and sensitivity has been adjusted properly and completely at the factory. If any special reason occasioned, take the following procedures very carefully:

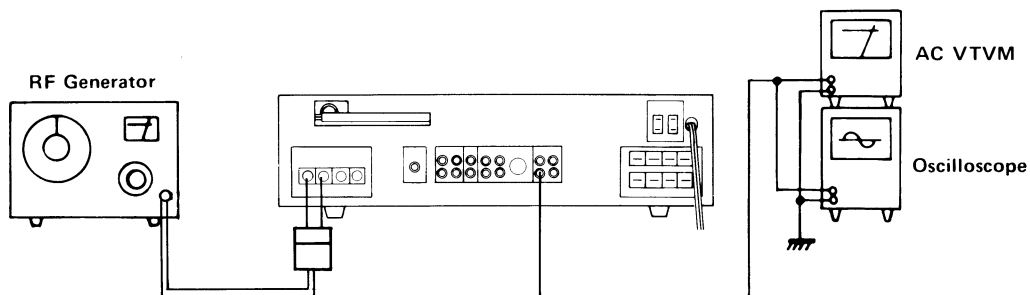


Fig. 20

Low Frequency

1. Connect an RF generator to the antenna terminals on the rear panel through a dummy antenna.
2. Set the RF generator to 88 MHz, a modulation of 400 Hz and a deviation of 75 kHz, to provide an input of $2 \mu V$.
3. Connect a VTVM and an oscilloscope to the Rec. Out Jacks on the rear panel.
4. Set the dial pointer to 88 MHz.
5. Adjust three coils L103, L102 and L101 in the tuning gang to maximize the output.

High Frequency

6. Set the RF generator 108 MHz, a modulation of 400 Hz and a deviation of 75 MHz, to provide an input of $2 \mu\text{V}$.
7. Set the dial pointer to 108 MHz.
8. Adjust the FM trimmers TC3, TC2 and TC1 in the tuning gang to maximize the output.
9. Repeat these high and low frequency adjustments alternately until maximum sensitivity is obtained.

Muting Level (Check Up) (See Fig. 20)

Note: No adjustment is necessary. However, if the check up is required, take the following steps.

1. Connect a VTVM and an oscilloscope to the Rec. Out Jacks.
2. Set the RF generator to 108 MHz, a modulation of 1 kHz and a deviation of 75 kHz, to provide an input of $10 \mu\text{V}$. Keep the front muting switch on.
3. Turn R155 clockwise and remember the point at which the muting ceases operating.
4. Turn R155 counterclockwise slightly so that the output level drops by 1 dB.
5. Attenuate the output of the RF generator to 2 dB from $10 \mu\text{V}$ of Step 2 and check that the muting is still operating.

P.L.L. Free Running Frequency and Stereo Separation

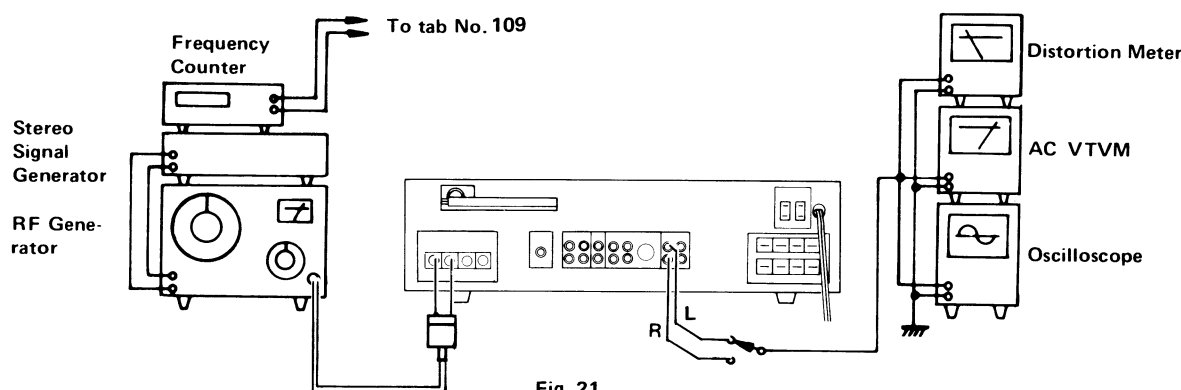


Fig. 21

P.L.L. Free Running Frequency

1. Connect the RF generator to the antenna terminals through a dummy antenna.
2. Connect a VTVM, an oscilloscope and a distortion meter to the Rec. Out Jacks.
3. Set the RF generator to 98 MHz and an output of 1 mV at 400Hz modulation and 75kHz deviation.
4. Set the dial pointer to 98 MHz.
5. Connect a frequency counter to Tab. No. 109.
6. Adjust R208 so that the frequency counter indicates 19 kHz (± 0.01 kHz).

Stereo Separation

1. Set a stereo signal generator as follows: Modulation frequency 400 Hz, Deviation pilot 7.5 kHz, Main and Sub. carrier 67.5 kHz. Connect its output to an RF generator. Set the RF generator to 98 MHz and output of 1 mV.
2. Switch the selector of the stereo modulator to left channel modulation.
3. Adjust R240 so that the output of the right channel is minimized.
4. Switch the selector of the modulator to right channel modulation.
5. Adjust R240 so that the output of the left channel is minimized.
6. Set R240 to average, if the separation of right and left are different.

Note: Keep the mono pushbutton out during this adjustment procedure of stereo separation.

7-(2) AM Section

Tracking and Sensitivity

Low Frequency

1. Connect an RF generator to the antenna terminals on the rear panel, set this to 600 kHz with 30 % modulation at 400 Hz.
2. Connect an AC VTVM and an oscilloscope to Rec. Out Jacks on the rear panel.
3. Set the dial pointer to 600 kHz.
4. Adjust Osc. transformer L302 and the ferrite bar antenna core to maximize the output signal.

High Frequency

5. Set the RF generator to 1 400 kHz with 30 % modulation at 400 Hz.
6. Set the dial pointer to 1 400 kHz.
7. Adjust the trimmers TC4 and TC5 in the AM tuning gang so that the output signal is maximized.
8. Repeat these high and low frequency adjustments alternately until maximum sensitivity is obtained.

8. Power Amplifier Adjustment Procedures

8-(1) Center Voltage

() : For Right Channel Adjustment

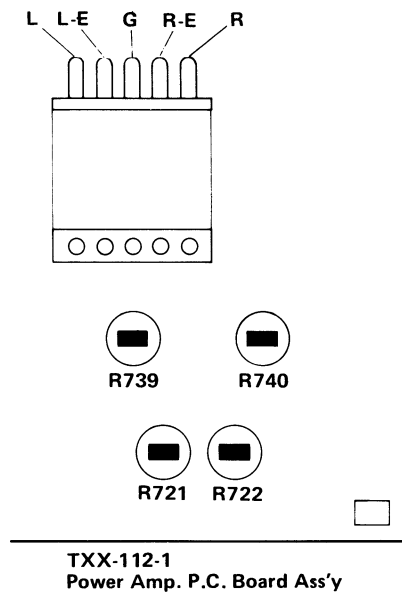


Fig. 22A

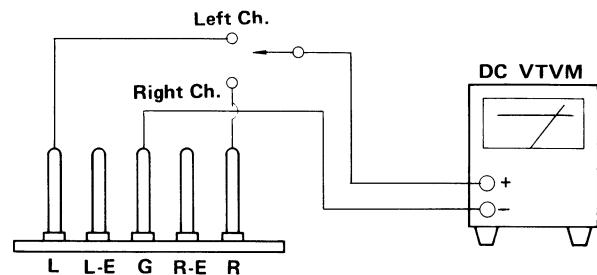


Fig. 22B

Procedure

Precaution: Allow the set to warm up at least 5 minutes before connecting a DC VTVM.

1. Set R721 (R722) located on TXX-112-1 to center position before pressing the power switch on. Refer to Fig. 22A.
2. Connect a DC VTVM to test points "L" and "G" ("R" and "G"). Refer to Fig. 22B.
3. Adjust R721 (R722) for DC VTVM reading of 0 mV. Refer to Fig. 22A.

8-(2) Idling Current

() : For Right Channel Adjustment

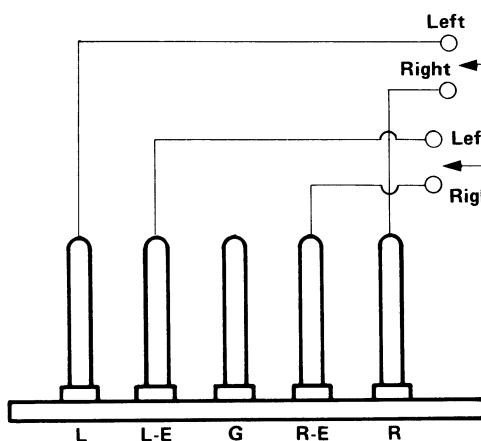


Fig. 23A

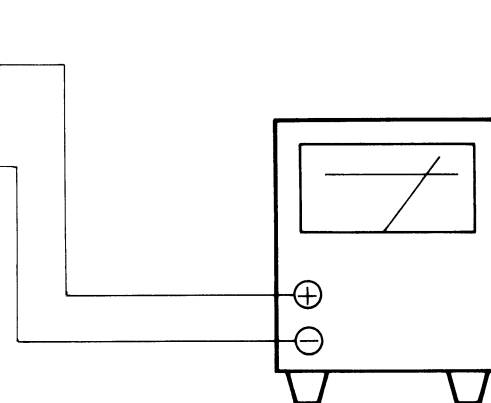


Fig. 23B

Procedure


Precaution: Allow the set to warm up at least 5 minutes before connecting a DC VTVM.

1. Turn R739 and R740 fully counterclockwise before pressing the power switch on. Refer to Fig. 23A.
2. Connect a DC VTVM to test points "L" and "L-E" ("R" and "R-E"). Refer to Fig. 23B.
3. Adjust R739 (R740) for a DC VTVM reading of -10 mV.

Note: The heat sinks must be cooled and the volume control set to minimum during these adjustment procedures.

9. Printed Circuit Board Ass'y and Parts List

9-(1) TXX-112 Audio P. C. Board Ass'y

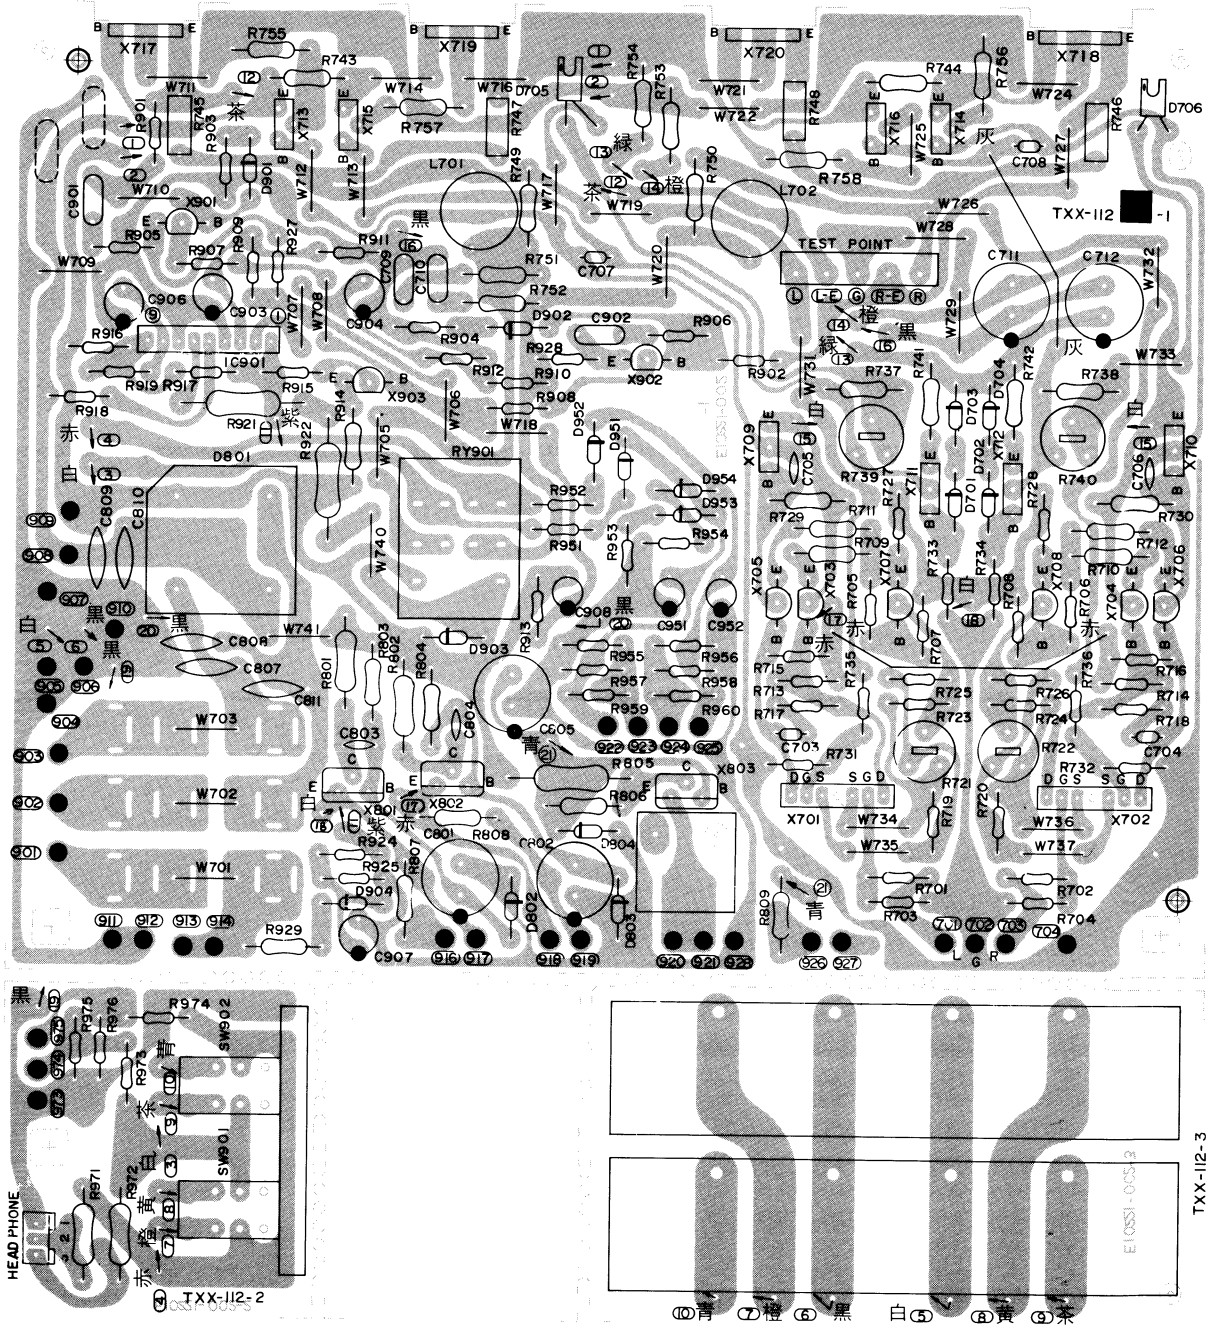

Locations

1. TXX-112-1 Power Amp. P.C. Board Ass'y
2. TXX-112-2 Speaker Switch P.C. Board Ass'y
3. TXX-112-3 Speaker Terminals P.C. Board Ass'y

Note: The number of TXX-112 varies according to the area employed. See table below.

P.C. Board Ass'y	Areas	Fuse clip	Fuse label
TXX-112A	for U.S.A., Military Market and Other Countries	E45524-001	E65489-001
TXX-112B	for Canada only	E45524-001	E65407-001
TXX-112C	for Europe, Australia and U.K.	E48965-002	E65407-002
			E65407-002BS (U.K. only)

CAUTION

If this section (shaded) of the printed wiring is different from the above, see CAUTION TABLE at page 17.

Fig. 24

Transistors

Item No.	Part Number	Rating		Description	Maker
		Pc	fT		
X701	MPA63H(1)	0.2 W		F.E.T.	NEC
X702	MPA63H(1)	"		"	"
X703	2SC1775AV(F)	0.3 W	200 MHz	Silicon	Hitachi
X704	2SC1775AV(F)	"	"	"	"
X705	2SC1775AV(F)	"	"	"	"
X706	2SC1775AV(F)	"	"	"	"
X707	2SC1775AV(F)	"	"	"	"
X708	2SC1775AV(F)	"	"	"	"
X709	2SA899(B, V)	1 W	100 MHz	"	Fujitsu
X710	2SA899(B, V)	"	"	"	"
X711	2SC1904(B, V)	"	"	"	"
X712	2SC1904(B, V)	"	"	"	"
X713	2SD669A(B, C)	20 W	140 MHz	"	Hitachi
X714	2SD669A(B, C)	"	"	"	"
X715	2SB649A(B, C)	"	"	"	"
X716	2SB649A(B, C)	"	"	"	"
X717	2SD738(B, C)	125 W	10 MHz	"	"
X718	2SD738(B, C)	"	"	"	"
X719	2SB702(B, C)	"	18 MHz	"	"
X720	2SB702(B, C)	"	"	"	"
X801	2SB514V(D, E)	20 W	8 MHz	"	Sanyo
X802	2SD330V(D, E)	"	"	"	"
X803	2SD330V(D, E)	"	"	"	"
X901	2SC1775AV(F)	0.3 W	200 MHz	"	Hitachi
X902	2SC1775AV(F)	"	"	"	"
X903	2SA872AV(E)	"	120 MHz	"	"

Integrated Circuit

Item No.	Part Number	Rating (Pc)		Description	Maker
IC901	TA7317P	0.5 W		I.C.	Toshiba

Diodes

Item No.	Part Number	Rating		Description	Maker
D701	1S2473			Silicon	Toyo Dengu
D702	1S2473			"	"
D703	1S2473			"	"
D704	1S2473			"	"
D705	STV3H			Varistor	Sanken
D706	STV3H			"	"
D801	S5VB20			Silicon	Shindengen
D802	WZ-280			"	JRC
D803	WZ-280			"	"
D804	XZ-132			"	"
D901	1S2473			"	Toyo Dengu
D902	1S2473			"	"
D903	1S2473			"	"
D904	1S2473			"	"
D951	1S2473			"	"
D952	1S2473			"	"
D953	1S2473			"	"
D954	1S2473			"	"

Coils & Transformers

Item No.	Part Number	Rating		Description
L701	E04059-1R2	1.2 μ F		Choke Coil
L702	E04059-1R2	"		"

Capacitors

Item No.	Part Number	Rating		Description
C703	QFM31HK-102	1000 pF	50 V	Mylar
C704	QFM31HK-102	"	"	"
C705	QCS31HJ-270	27 pF	"	Ceramic
C706	QCS31HJ-270	"	"	"
C707	QFM31HK-103	0.01 μ F	"	Mylar
C708	QFM31HK-103	"	"	"
C709	QFM31HK-473	0.047 μ F	"	"
C710	QFM31HK-473	"	"	"
C711	QEW51JA-107	100 μ F	63 V	Electrolytic
C712	QEW51JA-107	"	"	"
C801	QEW51VA-107	"	35 V	"
C802	QEW51VA-107	"	"	"
C803	QCF31HP-103	0.01 μ F	50 V	Ceramic
C804	QCF31HP-103	"	"	"
C805	QEW51VA-227	220 μ F	35 V	Electrolytic
C807	QCF12HP-103	0.01 μ F	500 V	Ceramic
C808	QCF12HP-103	"	"	"
C809	QCF12HP-103	"	"	"
C810	QCF12HP-103	"	"	"
C901	QFM31HK-104	0.1 μ F	50 V	Mylar
C902	QFM31HK-104	"	"	"
C903	QEW51AA-107	100 μ F	10 V	Electrolytic
C904	QEW51AA-107	"	"	"
C906	QEW51AA-226	22 μ F	"	"
C907	QEW51HA-105	1 μ F	50 V	"
C908	QEW51HA-106	10 μ F	"	"
C951	QEW51AA-106	"	"	"
C952	QEW51AA-106	"	"	"

Resistors

Item No.	Part Number	Rating		Description
R701	QRD141J-122S	1.2 k Ω	1/4 W	Carbon
R702	QRD141J-122S	"	"	"
R703	QRD141J-563S	56 k Ω	"	"
R704	QRD141J-563S	"	"	"
R705	QRD141J-183S	18 k Ω	"	"
R706	QRD141J-183S	"	"	"
R707	QRD141J-822S	8.2 k Ω	"	"
R708	QRD141J-822S	"	"	"
R709	QRG129J-121	120 Ω	1/2 W	Oxide Metal Film
R710	QRG129J-121	"	"	"
R711	QRG129J-121	"	"	"
R712	QRG129J-121	"	"	"
R713	QRD141J-123S	12 k Ω	1/4 W	Carbon
R714	QRD141J-123S	"	"	"
R715	QRD141J-123S	"	"	"
R716	QRD141J-123S	"	"	"
R717	QRD141J-122S	1.2 k Ω	"	"
R718	QRD141J-122S	"	"	"
R719	QRD141J-560S	56 Ω	"	"

Resistors

Item No.	Part Number	Rating		Description
R720	QRD141J-560S	56 Ω	1/4 W	Carbon
R721	QVP4A0B-221	220 Ω		Variable
R722	QVP4A0B-221	"		"
R723	QRD141J-222S	2.2 k Ω	1/4 W	Carbon
R724	QRD141J-222S	"	"	"
R725	QRD141J-222S	"	"	"
R726	QRD141J-222S	"	"	"
R727	QRD141J-472S	4.7 k Ω	"	"
R728	QRD141J-472S	"	"	"
R729	QRG129J-102	1 k Ω	1/2 W	Oxide Metal Film
R730	QRG129J-102	"	"	"
R731	QRD141J-332S	3.3 k Ω	1/4 W	Carbon
R732	QRD141J-332S	"	"	"
R733	QRD141J-473S	47 k Ω	"	"
R734	QRD141J-473S	"	"	"
R735	QRD141J-563S	56 k Ω	"	"
R736	QRD141J-563S	"	"	"
R737	QRG129J-391	390 Ω	1/2 W	Oxide Metal Film
R738	QRG129J-391	"	"	"
R739	QVP4A0B-221	220 Ω		Variable
R740	QVP4A0B-221	"		"
R741	QRG129J-101	100 Ω	1/2 W	Oxide Metal Film
R742	QRG129J-101	"	"	"
R743	QRG129J-271	270 Ω	"	"
R744	QRG129J-271	"	"	"
R745	QRM054K-R47	0.47 Ω	5 W	Metal Plate
R746	QRM054K-R47	"	"	"
R747	QRM054K-R47	"	"	"
R748	QRM054K-R47	0.47 Ω	5 W	Metal Plate
R749	QRX129J-4R7	4.7 Ω	1/2 W	Oxide Metal Film
R750	QRX129J-4R7	"	"	"
R751	QRX129J-100	10 Ω	"	"
R752	QRX129J-100	"	"	"
R753	QRG129J-470	47 Ω	"	"
R754	QRG129J-470	"	"	"
R755	QRD126J-100	10 Ω	"	Carbon
R756	QRD126J-100	"	"	"
R757	QRD126J-100	"	"	"
R758	QRD126J-100	"	"	"
R801	QRG017J-151S	150 Ω	1 W	Oxide Metal Film
R802	QRG017J-151S	"	"	"
R803	QRG129J-472	4.7 k Ω	1/2 W	"
R804	QRG129J-472	"	"	"
R805	QRG027J-820	82 Ω	2 W	"
R806	QRG129J-332	3.3 k Ω	1/2 W	"
R807	QRG129J-151	150 Ω	"	"
R808	QRG129J-151	"	"	"
R809	QRG129J-222	2.2 k Ω	"	"
R901	QRD141J-222S	"	1/4 W	Carbon
R902	QRD141J-222S	"	"	"
R903	QRD141J-562S	5.6 k Ω	"	"
R904	QRD141J-562S	"	"	"
R905	QRD141J-101S	100 Ω	"	"
R906	QRD141J-101S	"	"	"
R907	QRD141J-123S	12 k Ω	"	"
R908	QRD141J-123S	"	"	"
R909	QRD141J-104S	100 k Ω	"	"
R910	QRD141J-104S	"	"	"
R911	QRD141J-563S	56 k Ω	"	"
R912	QRD141J-563S	"	"	"
R913	QRD141J-103S	10 k Ω	"	"



Resistors

Item No.	Part Number	Rating		Description
R914	QRG129J-471	470 Ω	1/2 W	Oxide Metal Film
R915	QRD141J-563S	56 kΩ	1/4 W	Carbon
R916	QRD141J-183S	18 kΩ	"	"
R917	QRD141J-683S	68 kΩ	"	"
R918	QRD141J-153S	15 kΩ	"	"
R919	QRD141J-224S	220 kΩ	"	"
R921	QRG027J-331	330 Ω	2 W	Oxide Metal Film
R922	QRG027J-331	"	"	"
R924	QRD141J-563S	56 kΩ	1/4 W	Carbon
R925	QRD141J-223S	22 kΩ	"	"
R927	QRD141J-471S	470 Ω	"	"
R928	QRD141J-471S	"	"	"
R929	QRG129J-102	1 kΩ	1/2 W	Oxide Metal Film
R951	QRD141J-562S	5.6 kΩ	1/4 W	Carbon
R952	QRD141J-562S	"	"	"
R953	QRD141J-221S	220 Ω	"	"
R954	QRD141J-221S	"	"	"
R955	QRD141J-222S	2.2 kΩ	"	"
R956	QRD141J-222S	"	"	"
R957	QRD141J-273S	27 kΩ	"	"
R958	QRD141J-273S	"	"	"
R959	QRD141J-822S	8.2 kΩ	"	"
R960	QRD141J-822S	"	"	"
R971	QRG017J-221S	220 Ω	1 W	Oxide Metal Film
R972	QRG017J-221S	"	"	"
R973	QRD141J-332S	3.3 kΩ	1/4 W	Carbon
R974	QRD141J-332S	"	"	"
R975	QRD141J-681S	680 Ω	"	"

Others

Item No.	Part Number	Rating	Description
	E03728-3-15-1 E03732-003A E61537-002 E65376-001 E65376-002		Parallel Wire 3 Pins Plug Heat Sink (X803) C.B. Holder (Right) C.B. Holder (Left)
RY901	E03572-008B QSP0220-102 E03628-5UD E35553-001 E35554-001 ESK6D24-211		SPK. Terminal Push-switch 5 Pins Plug Heat Sink Sub Heat Sink Relay Switch

Caution Table

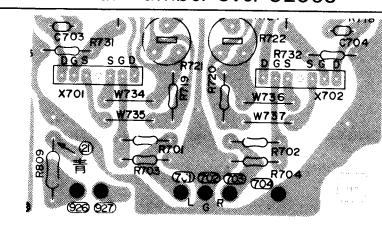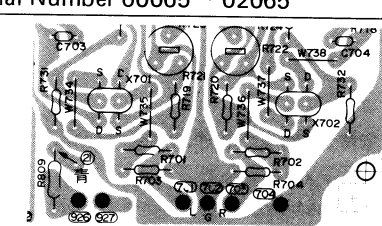Apply to:	Serial Number over 02066		Serial Number 00065 ~ 02065		
Printed Wiring (part of shadow)	 <p>Same as Fig. 24</p>		 <p>Different Wiring</p>		
	Item No.	Part Number	Rating	Part Number	Rating
Transistors	X701 X702	MPA63H(1) MPA63H(1)	0.2 W 0.2 W	2SK129 2SK129	0.25 W 0.25 W

The serial numbers shown in the table are pointed out the last five digits of the serial number located on the rear panel.

For example, 02066 → □□□02066

9-(2) TXX-113A Equalizer Amp., Switches and Indicator P. C. Board Ass'y


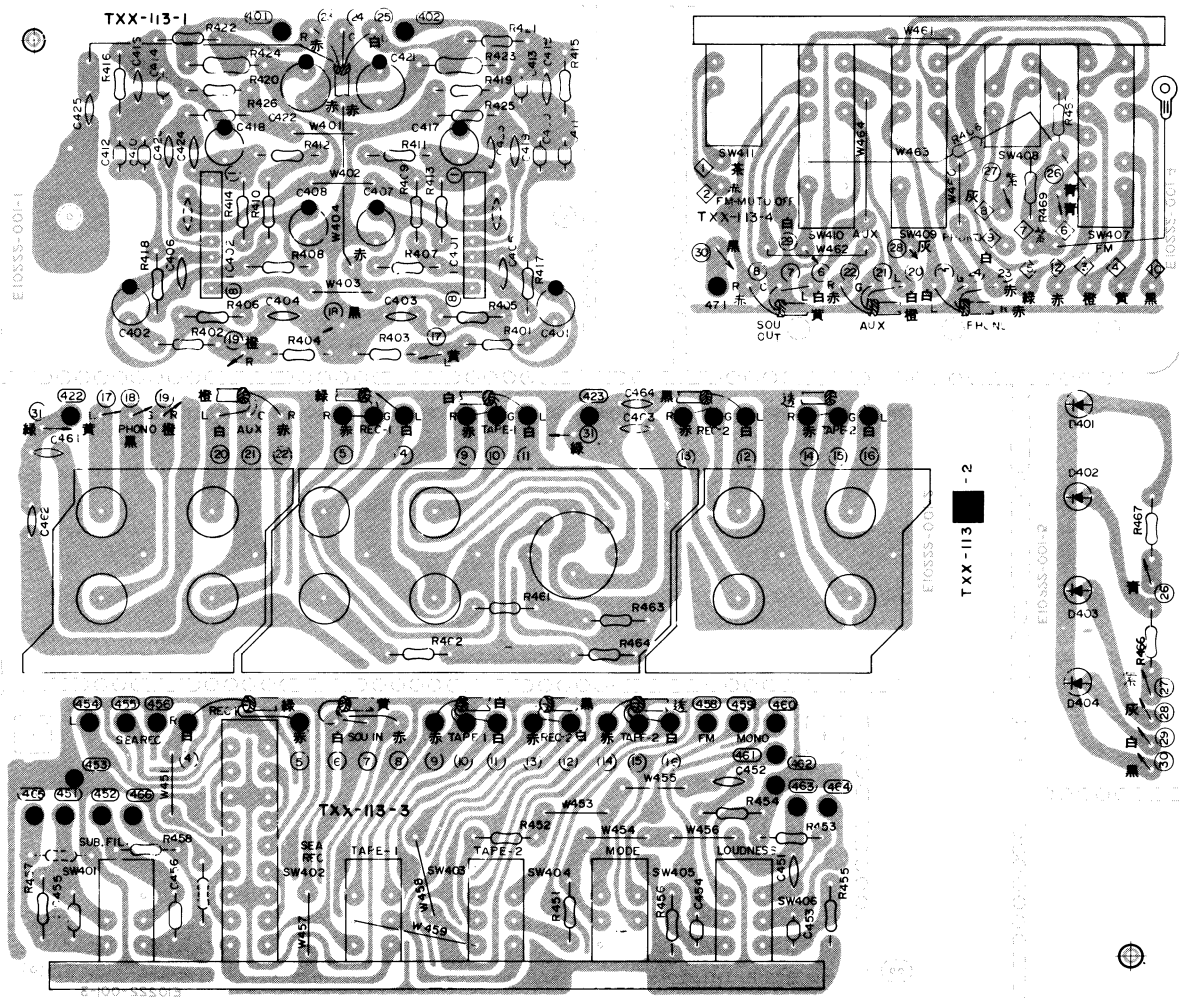


Fig. 25

Locations

- | | |
|--|---|
| 1. TXX-113A-1
Equalizer Amp. P.C. Board Ass'y | 3. TXX-113A-3
Function Switches P.C. Board Ass'y |
| 2. TXX-113A-2
Pin Jack P.C. Board Ass'y | 4. TXX-113A-4
Source Switches P.C. Board Ass'y |
| | 5. TXX-113A-5
LED Indicators P.C. Board Ass'y |



Integrated Circuits

Item No.	Part Number	Rating (Pc)	Description	Maker
IC401	HA1457	0.5 W	I.C.	Hitachi
IC402	HA1457	"	"	"

Diodes

Item No.	Part Number	Rating	Description	Maker
D401	TLR102		L.E.D.	Toshiba
D402	TLR102		"	"
D403	TLR102		"	"
D404	TLR102		"	"

Capacitors

Item No.	Part Number	Rating		Description
C401	QEB51EM-475	4.7 μ F	25 V	Low Leak Current Electrolytic
C402	QEB51EM-475	"	"	"
C403	QCS31HJ-470	47 pF	50 V	Ceramic
C404	QCS31HJ-470	"	"	"
C405	QCS31HJ-101	100 pF	"	"
C406	QCS31HJ-101	"	"	"
C407	QEW51AA-107	100 μ F	10 V	Electrolytic
C408	QEW51AA-107	"	"	"
C409	QFP32AG-332	3300 pF	100 V	Polypropylene
C410	QFP32AG-332	"	"	"
C411	QFP32AG-122	1200 pF	"	"
C412	QFP32AG-122	"	"	"
C413	QFP32AG-152	1500 pF	"	"
C414	QFP32AG-152	"	"	"
C415	QCS31HJ-560	56 pF	50 V	Ceramic
C416	QCS31HJ-560	"	"	"
C417	QEB51EM-225	2.2 μ F	25 V	Low Leak Current Electrolytic
C418	QEB51EM-225	"	"	"
C419	QCS31HJ-560	56 pF	50 V	Ceramic
C420	QCS31HJ-560	"	"	"
C421	QEW51EA-226	22 μ F	25 V	Electrolytic
C422	QEW51EA-226	"	"	"
C423	QCS31HJ-271	270 pF	50 V	Ceramic
C424	QCS31HJ-271	"	"	"
C425	QCF31HP-223	0.022 μ F	"	"
C451	QCS31HJ-271	270 pF	"	"
C452	QCS31HJ-271	"	"	"
C453	QFM31HJ-273	0.027 μ F	"	Mylar
C454	QFM31HJ-273	"	"	"
C455	QFM31HJ-154	0.15 μ F	"	"
C456	QFM31HJ-154	"	"	"
C461	QCF31HP-103	0.01 μ F	"	Ceramic
C462	QCF31HP-103	"	"	"
C463	QCF31HP-103	"	"	"
C464	QCF31HP-103	"	"	"

Resistors

Item No.	Part Number	Rating		Description
R401	QRD141J-222S	2.2 k Ω	1/4 W	Carbon
R402	QRD141J-222S	"	"	"
R403	QRD141J-104S	100 k Ω	"	"
R404	QRD141J-104S	"	"	"
R405	QRD141J-104S	"	"	"
R406	QRD141J-104S	"	"	"
R407	QRD141J-821S	820 Ω	"	"
R408	QRD141J-821S	"	"	"
R409	QRD141J-564S	560 k Ω	"	"
R410	QRD141J-564S	"	"	"
R411	QRD141J-683S	68 k Ω	"	"
R412	QRD141J-683S	"	"	"
R413	QRD141J-474S	470 k Ω	"	"
R414	QRD141J-474S	"	"	"
R415	QRD141J-513S	51 k Ω	"	"
R416	QRD141J-513S	"	"	"
R417	QRD141J-101S	100 Ω	"	"
R418	QRD141J-101S	"	"	"
R419	QRD141J-224S	220 k Ω	"	"

Resistors

Item No.	Part Number	Rating		Description
R420	QRD141J-224S	220 k Ω	1/4 W	Carbon
R421	QRD141J-471S	470 Ω	"	"
R422	QRD141J-471S	"	"	"
R423	QRG129J-681	680 Ω	1/2 W	Oxide Metal Film
R424	QRG129J-681	"	"	"
R425	QRD141J-102S	1 k Ω	1/4 W	Carbon
R426	QRD141J-102S	"	"	"
R451	QRD141J-472S	4.7 k Ω	"	"
R452	QRD141J-472S	"	"	"
R453	QRD141J-564S	560 k Ω	"	"
R454	QRD141J-564S	"	"	"
R455	QRD141J-153S	15 k Ω	"	"
R457	QRD141J-105S	1 M Ω	"	"
R458	QRD141J-105S	"	"	"
R461	QRD141J-334S	330 k Ω	"	"
R462	QRD141J-334S	"	"	"
R463	QRD141J-104S	100 k Ω	"	"
R465	QRD141J-102S	330 Ω	"	"
R466	QRD141J-102S	1 k Ω	"	"
R467	QRD141J-102S	"	"	"
R468	QRD141J-102S	"	"	"
R469	QRD141J-102S	"	"	"

Others

Item No.	Part Number	Rating		Description
	E03733-1202			Socket Wire Ass'y
	E35530-001			Bracket (Source)
	E65377-001			C.B. Holder (EQ)
	E65419-001			L.E.D. Holder
	52868-3			Terminal (GND)
	QSP0261-101			Push-switch (Function)
	QSP0251-102			Push-switch (Source)
	E03591-40D			Pin Jack (PHONO, AUX, TAPE-2)
	E03591-001			Terminal Ass'y (TAPE-1)

9-(3) TXX-117A(or TXX-130A) AC Block P. C. Board Ass'y

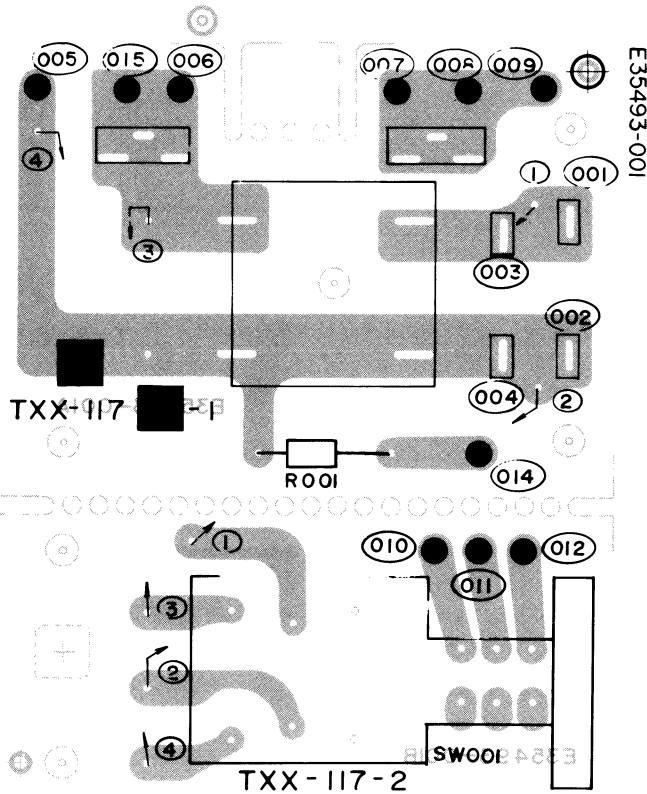


Fig. 26

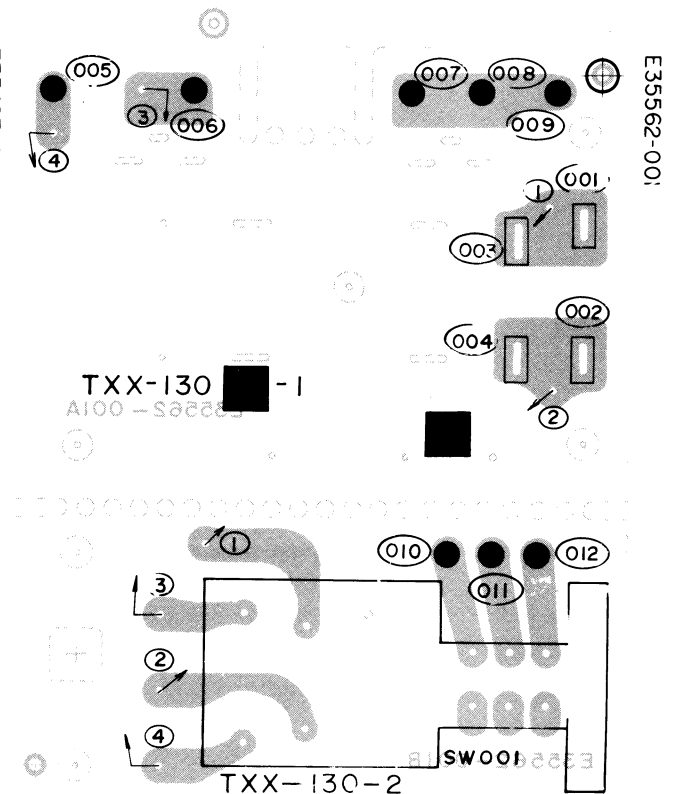


Fig. 27

TXX-117 (or TXX-130) AC Block P.C. Board Ass'y varies according to the area employed. See the table shown below.

Designated Area	U.S.A. and Canada	U.S. Military Market and Other Countries	Australia and Europe	U.K.
P.C. Board Ass'y	TXX-117A	TXX-117B	TXX-130A	TXX-130BBS

P.C. Board Ass'y	Item No.	Parts Number	Rating		Description
TXX-117A	R001	QRC121K-275E	2.7 MΩ	1/2 W	Composition Resistor Δ
	SW001	E03675-003 QSP0020-001 QMC0437-001			Fuse Clip Push-switch Δ AC Outlet Δ
TXX-117B	R001	QRC121K-475E	4.7 MΩ	1/2 W	Composition Resistor Δ
	SW001	E03675-003 QSP0020-001 QMC0437-001			Fuse Clip Push-switch Δ AC Outlet
TXX-130A	SW001	QSP0020-001 E65412-001			Push-switch Δ C.B. Holder
TXX-130B	SW001	QSP0020-001BS E65412-001			Push-switch Δ C.B. Holder

NOTE: Δ SAFETY PARTS

9-(4) TAC-488A S.E.A. (Sound Effect Amp.)P. C. Board Ass'y

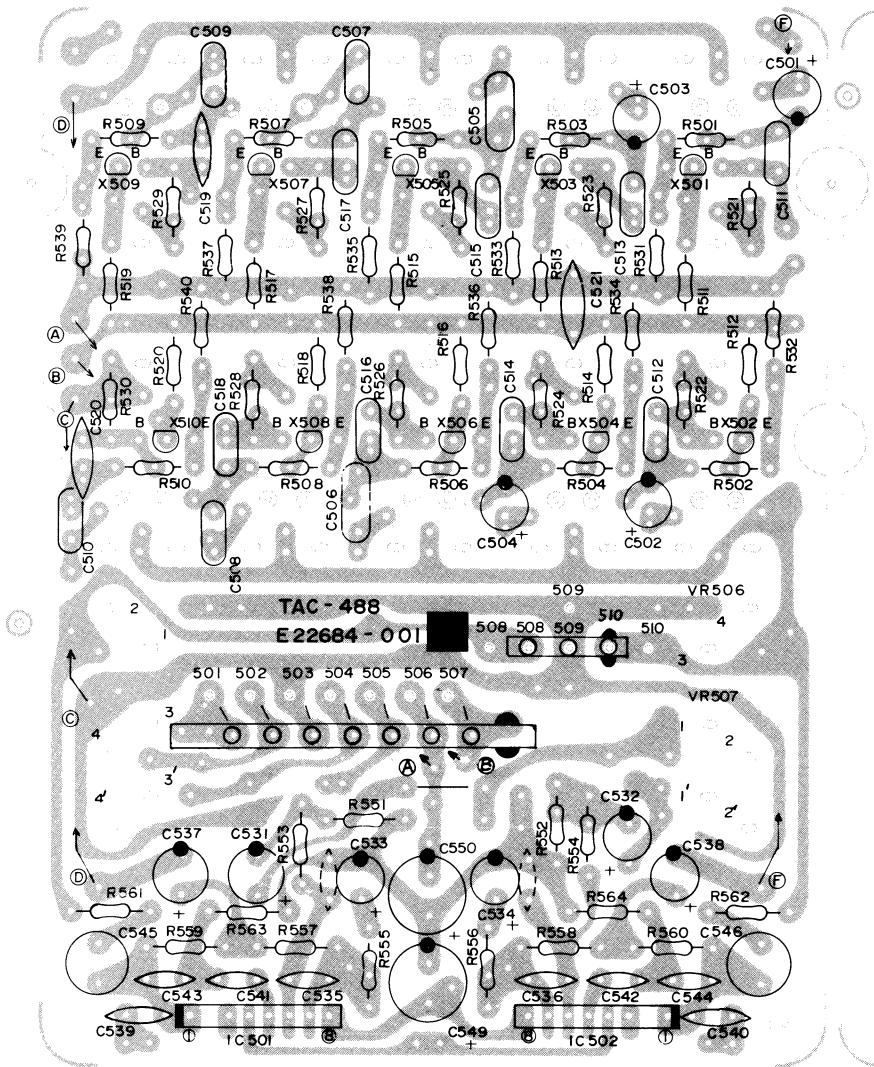


Fig. 28

Transistors

Item No.	Part Number	Rating		Description	Maker
		Pc	fT		
X501	2SC1775AV(F)	0.3 W	200 MHz	Silicon	Hitachi
X502	2SC1775AV(F)			"	"
X503	2SC1775AV(F)			"	"
X504	2SC1775AV(F)			"	"
X505	2SC1775AV(F)			"	"
X506	2SC1775AV(F)			"	"
X507	2SC1775AV(F)			"	"
X508	2SC1775AV(F)	"	"	"	"
X509	2SC1775AV(F)	"	"	"	"
X510	2SC1775AV(F)	"	"	"	"

Integrated Circuits

Item No.	Part Number	Rating (Pc)	Description	Maker
IC501	HA1457	0.5 W	I.C.	Hitachi
IC502	HA1457	"	"	"

Capacitors

Item No.	Part Number	Rating		Description
C501	QEB51EM-475	4.7 μ F	25 V	Low Leak Current Electrolytic
C502	QEB51EM-475	"	"	"
C503	QEB51HM-474	0.47 μ F	50 V	"
C504	QEB51HM-474	"	"	"
C505	QFM31HK-124	0.12 μ F	"	Mylar
C506	QFM31HK-124	"	"	"
C507	QFM31HK-273	0.027 μ F	"	"
C508	QFM31HK-273	"	"	"
C509	QFM31HK-562	5600 pF	"	"
C510	QFM31HK-562	"	"	"
C511	QFM31HK-223	0.022 μ F	"	"
C512	QFM31HK-223	"	"	"
C513	QFM31HK-822	8200 pF	"	"
C514	QFM31HK-822	"	"	"
C515	QFM31HK-332	3300 pF	"	"
C516	QFM31HK-332	"	"	"
C517	QFM31HK-102	1000 pF	"	"
C518	QFM31HK-102	"	"	"
C519	QCS31HJ-681	680 pF	"	Ceramic
C520	QCS31HJ-681	"	"	"
C531	QEB51EM-475	4.7 μ F	25 V	Low Leak Current Electrolytic
C532	QEB51EM-475	"	"	"
C533	QEW51AA-476	47 μ F	10 V	Electrolytic
C534	QEW51AA-476	"	"	"
C535	QCS31HJ-101	100 pF	50 V	Ceramic
C536	QCS31HJ-101	"	"	"
C537	QEW51AA-476	47 μ F	10 V	Electrolytic
C538	QEW51AA-476	"	"	"
C539	QCS31HJ-820	82 pF	50 V	Ceramic
C540	QCS31HJ-820	"	"	"
C541	QCS31HJ-560	56 pF	"	"
C542	QCS31HJ-560	"	"	"
C543	QCS31HJ-271	270 pF	"	"
C544	QCS31HJ-271	"	"	"
C545	QEZ0046-475	4.7 μ F	"	Electrolytic
C546	QEZ0046-475	"	"	"
C549	QEW51EA-476	47 μ F	25 V	"
C550	QEW51EA-476	"	"	"

Resistors

Item No.	Part Number	Rating		Description
R501	QRD141J-122S	1.2 k Ω	1/4 W	Carbon
R502	QRD141J-122S	"	"	"
R503	QRD141J-122S	"	"	"
R504	QRD141J-122S	"	"	"
R505	QRD141J-122S	"	"	"
R506	QRD141J-122S	"	"	"
R507	QRD141J-122S	"	"	"
R508	QRD141J-122S	"	"	"
R509	QRD141J-122S	"	"	"
R510	QRD141J-122S	"	"	"
R511	QRD141J-391S	390 Ω	"	"
R512	QRD141J-391S	"	"	"
R513	QRD141J-391S	"	"	"
R514	QRD141J-391S	"	"	"
R515	QRD141J-391S	"	"	"
R516	QRD141J-391S	"	"	"
R517	QRD141J-391S	"	"	"

Resistors

Item No.	Part Number	Rating		Description
R518	QRD141J-391S	390 Ω	1/4 W	Carbon
R519	QRD141J-391S	"	"	"
R520	QRD141J-391S	"	"	"
R521	QRD141J-134S	130 kΩ	"	"
R522	QRD141J-134S	"	"	"
R523	QRD141J-913S	91 kΩ	"	"
R524	QRD141J-913S	"	"	"
R525	QRD141J-513S	51 kΩ	"	"
R526	QRD141J-513S	"	"	"
R527	QRD141J-333S	33 kΩ	"	"
R528	QRD141J-333S	"	"	"
R529	QRD141J-243S	24 kΩ	"	"
R530	QRD141J-243S	"	"	"
R531	QRD141J-682S	6.8 kΩ	"	"
R532	QRD141J-682S	"	"	"
R533	QRD141J-682S	"	"	"
R534	QRD141J-682S	"	"	"
R535	QRD141J-682S	"	"	"
R536	QRD141J-682S	"	"	"
R537	QRD141J-682S	"	"	"
R538	QRD141J-682S	"	"	"
R539	QRD141J-682S	"	"	"
R540	QRD141J-682S	"	"	"
R551	QRD141J-184S	180 kΩ	"	"
R552	QRD141J-184S	"	"	"
R553	QRD141J-102S	1 kΩ	"	"
R554	QRD141J-102S	"	"	"
R555	QRD141J-222S	2.2 kΩ	"	"
R556	QRD141J-222S	"	"	"
R557	QRD141J-682S	6.8 kΩ	"	"
R558	QRD141J-682S	"	"	"
R559	QRD141J-103S	10 kΩ	"	"
R560	QRD141J-103S	"	"	"
R561	QRD141J-562S	5.6 kΩ	"	"
R562	QRD141J-562S	"	"	"
R563	QRD141J-102S	1 kΩ	"	"
R564	QRD141J-102S	"	"	"

Others

Item No.	Part Number	Rating	Description
	E35529-001		Bracket
	E65381-001		Felt
VR501	QVZ5010-002	250 kΩ x 2	Slide Volume
VR502	QVZ5010-002	"	"
VR503	QVZ5010-002	"	"
VR504	QVZ5010-002	"	"
VR505	QVZ5010-002	"	"
VR506	QVT6C2W-6F5	250 kΩ (W)	"
VR507	QVT9C2B-5G5E	150 kΩ x 2 (B)	"

9-(5) TFM914GUA1 FM/AM Tuner P. C. Board Ass'y

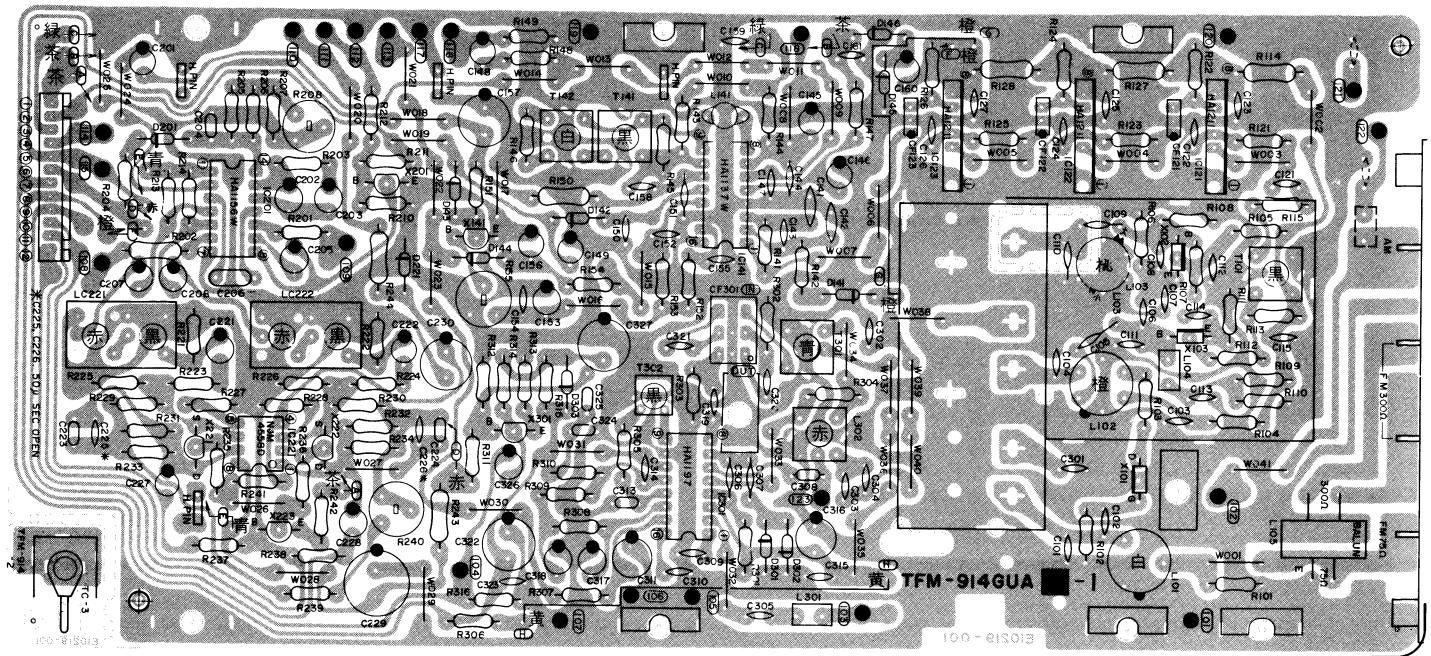


Fig. 29

Transistors

Item No.	Part Number	Rating		Description	Maker
		Pc	fT		
X101	2SK55D	0.15 W	100 MHz	F.E.T.	Hitachi
X102	2SC1342(B, C)	0.1 W	250 MHz	Silicon	"
X103	2SC535(C)	"	940 MHz	"	"
X141	2SC458(C)	0.2 W	230 MHz	"	"
X201	2SC458(C)	"	"	"	"
X221	2SK68(M, N)	0.25 W		F.E.T.	NEC
X222	2SK68 (M, N)	"		"	"
X223	2SA872AV(E)	0.3 W	120 MHz	Silicon	Hitachi
X301	2SC458(C)	0.2 W	230 MHz	"	"

Integrated Circuits

Item No.	Part Number	Rating (Pc)		Description	Maker
IC121	HA1211	0.2 W		I.C.	Hitachi
IC122	HA1211	"		"	"
IC123	HA1211	"		"	"
IC141	HA1137W	0.55 W		"	"
IC201	HA1156W	0.4 W		"	"
IC221	NJM4558D	0.5 W		"	JRC
IC301	HA1197	0.45 W		"	Hitachi

Diodes

Item No.	Part Number	Rating		Description	Maker
D141	1S2473			Silicon	Toyo Dengu
D142	1S2473			"	"
D143	1S2473			"	"
D144	1S2473			"	"
D145	1S2473			"	"
D146	1S2473			"	"
D201	1S2473			"	"
D221	XZ-132	0.5 W	(13 Volt)	Zener	JRC
D301	1S2473			Silicon	Toyo Dengu
D302	1S2473			"	"
D303	1S2473			"	"

Coils & Transformers

Item No.	Part Number	Rating		Description
L101	E03477-031			RF Coil
L102	E03477-35			"
L103	E03477-026			OSC Coil
L104	E03522-1R5KY			Choke Coil
L105	E03177-001			Balun Coil
L141	E03746-220J			Choke Coil
L301	E03522-2R2KY			"
L302	E03079-29			AM OSC Coil
T101	E03078-39			FM IFT
T141	E03078-43			Detector Transformer
T142	E03078-44			"
T301	E03613-009			AM IFT
T302	E03062-36			"

Capacitors

Item No.	Part Number	Rating		Description
C101	QCS31HJ-150	15 pF	50 V	Ceramic
C102	QCS31HJ-330Z	33 pF	"	"
C103	QCF31HP-103ZU	0.01 μ F	"	"
C104	QCS31HJ-180Z	18 pF	"	"
C105	QCS11HJ-4R0	4 pF	"	"
C106	QCS31HJ-4R0	"	"	"
C107	QCT05CH-100	10 pF	"	"
C108	QCT05CH-220	22 pF	"	"
C109	QCT05CH-7R0	7 pF	"	"
C110	QCT05PH-220	22 pF	"	"
C111	QCS31HJ-3R0Z	3 pF	"	"
C112	QCF31HP-103ZU	0.01 μ F	50 V	"
C113	QCS31HJ-151Z	150 pF	"	"
C114	QCF31HP-103U	0.01 μ F	"	"
C115	QCF31HP-103ZU	"	"	"
C121	QCF31HP-223Z	0.022 μ F	"	"
C122	QCF31HP-223Z	"	"	"
C123	QCF31HP-223Z	"	"	"
C124	QCF31HP-223Z	"	"	"
C125	QCF31HP-223Z	"	"	"
C126	QCF31HP-223Z	"	"	"
C127	QCF31HP-223Z	"	"	"
C141	QCZ0107-473	0.047 μ F	"	"
C142	QCZ0107-473	"	"	"
C143	QCF31HP-223Z	0.022 μ F	50 V	"
C144	QCF31HP-223	"	"	"
C145	QEW61HA-105Z	1 μ F	"	Electrolytic
C146	QEW61EA-475Z	4.7 μ F	25 V	"
C147	QCS31HJ-330Z	33 pF	50 V	Ceramic
C148	QEW61EA-475Z	4.7 μ F	25 V	Electrolytic
C149	QEW61HA-105Z	1 μ F	50 V	"
C150	QCF31HP-223Z	0.022 μ F	"	Ceramic
C151	QCF31HP-223	"	"	"
C152	QCF31HP-223Z	"	"	"
C153	QEW51HA-474	0.47 μ F	"	Electrolytic
C154	QCF31HP-223Z	0.022 μ F	"	Ceramic
C155	QCF31HP-223Z	"	"	"
C156	QEW51AA-476	47 μ F	10 V	Electrolytic
C157	QEW51CA-107	100 μ F	16 V	"
C158	QCF31HP-223Z	0.022 μ F	50 V	Ceramic
C159	QCF31HP-223Z	"	"	"
C160	QEW61CA-106Z	10 μ F	16 V	Electrolytic
C161	QCF31HP-223Z	0.022 μ F	50 V	Ceramic
C162	QEW50JA-477	470 μ F	6.3 V	Electrolytic

Capacitors

Item No.	Part Number	Rating		Description
C201	QEW61CA-106Z	10 μ F	16 V	Electrolytic
C202	QEB51HM-224	0.22 μ F	50 V	Low Leak Current Electrolytic
C203	QEB51EM-106	10 μ F	25 V	"
C204	QFP31HJ-471	470 pF	50 V	Polypropylene
C205	QEB51HM-105	1 μ F	"	Low Leak Current Electrolytic
C206	QFM31HK-473	0.047 μ F	"	Mylar
C207	QEW61EA-475Z	4.7 μ F	25 V	Electrolytic
C208	QEW51EA-475	"	"	"
C221	QEW61EA-475Z	"	"	"
C222	QEW61EA-475Z	"	"	"
C223	QFP31HG-102	1000 pF	50 V	Polypropylene
C224	QFP31HG-102	"	"	"
C225	QFP31HJ-511	510 pF	"	"
C226	QFP31HJ-511	"	"	"
C227	QEW51EA-475	4.7 μ F	25 V	Electrolytic
C228	QEW61EA-475Z	"	"	"
C229	QEW51CA-477	470 μ F	16 V	"
C230	QEW51CA-107	100 μ F	"	"
C231	QFM31HK-104	0.01 μ F	50 V	Mylar
C301	QCS31HJ-3R0Z	3 pF	50 V	Ceramic
C302	QCS31HJ-150Z	15 pF	"	"
C303	QFP31HG-301	300 pF	"	Polypropylene
C304	QCS31HJ-220Z	22 pF	"	Ceramic
C305	QCF31HP-223Z	0.022 μ F	"	"
C306	QCF31HP-223	"	"	"
C307	QCF31HP-223	"	"	"
C308	QFM41HK-103	0.01 μ F	"	Mylar
C309	QCF31HP-223Z	0.022 μ F	"	Ceramic
C310	QCZ0107-473	0.047 μ F	"	"
C311	QEW61AA-476Z	47 μ F	10 V	Electrolytic
C313	QFM31HK-102Z	1000 pF	50 V	Mylar
C314	QCF31HP-223Z	0.022 μ F	"	Ceramic
C315	QCF31HP-223Z	"	"	"
C316	QEW51CA-476	47 μ F	16 V	Electrolytic
C317	QEW51HA-105	1 μ F	50 V	"
C318	QEW61CA-106Z	10 μ F	16 V	"
C319	QCF31HP-223	0.022 μ F	50 V	Ceramic
C320	QCS31HJ-101Z	100 pF	"	"
C321	QCS31HJ-101Z	"	"	"
C322	QEW51CA-107	100 μ F	16 V	Electrolytic
C323	QCF31HP-223Z	0.022 μ F	50 V	Ceramic
C324	QFM31HK-562Z	5600 pF	"	Mylar
C325	QFM31HK-473	0.047 μ F	"	"
C326	QEW61HA-474Z	0.47 μ F	"	Electrolytic
C327	QEW51CA-107	100 μ F	16 V	"

Resistors

Item No.	Part Number	Rating		Description
R102	QRD141J-105S	1 M Ω	1/4 W	Carbon
R103	QRD141J-470S	47 Ω	"	"
R104	QRD141J-101S	100 Ω	"	"
R105	QRD141J-561S	560 Ω	"	"
R106	QRD141J-222S	2.2 k Ω	"	"
R107	QRD141J-103S	10 k Ω	"	"
R108	QRD141J-103S	10 k Ω	"	"
R109	QRD141J-223S	22 k Ω	"	"
R110	QRD141J-472S	4.7 k Ω	"	"
R111	QRD141J-102S	1 k Ω	"	"
R112	QRD141J-101S	100 Ω	"	"
R114	QRX129J-100	10 Ω	1/2 W	Oxide Metal Film

Resistors

Item No.	Part Number	Rating		Description
R115	QRD141J-101S	100 Ω	1/4 W	Carbon
R121	QRD141J-471S	470 Ω	"	"
R122	QRD141J-331S	330 Ω	"	"
R123	QRD141J-331S	"	"	"
R124	QRD141J-331S	"	"	"
R125	QRD141J-331S	"	"	"
R126	QRD141J-331S	"	"	"
R127	QRX129J-100	10 Ω	1/2 W	Oxide Metal Film
R128	QRX129J-100	"	"	"
R141	QRD141J-331S	330 Ω	1/4 W	Carbon
R142	QRD141J-682S	6.8 kΩ	"	"
R143	QRD141J-103S	10 kΩ	"	"
R144	QRD141J-391S	390 Ω	"	"
R145	QRD141J-123S	12 kΩ	"	"
R146	QRD141J-222S	2.2 kΩ	"	"
R147	QRD141J-123S	12 kΩ	"	"
R148	QRD141J-223S	22 kΩ	"	"
R149	QRD141J-473S	47 kΩ	"	"
R150	QRX129J-100	10 Ω	1/2 W	Oxide Metal Film
R151	QRD141J-103S	10 kΩ	1/4 W	Carbon
R152	QRD141J-104S	100 kΩ	"	"
R153	QRD141J-332S	3.3 kΩ	"	"
R154	QRD141J-123S	12 kΩ	"	"
R155	QVP4A0B-473	47 kΩ	"	Variable
R201	QRD141J-105S	1 MΩ	1/4 W	Carbon
R202	QRG129J-221	220 Ω	1/2 W	Oxide Metal Film
R203	QRD141J-102S	1 kΩ	1/4 W	Carbon
R204	QRD141J-332S	3.3 kΩ	"	"
R205	QRD141J-183S	18 kΩ	"	"
R206	QRD141J-474S	470 kΩ	"	"
R207	QRD141J-153S	15 kΩ	"	"
R208	QVP4A0B-472	4.7 kΩ	"	Variable
R210	QRD141J-223S	22 kΩ	1/4 W	Carbon
R211	QRD141J-563S	56 kΩ	"	"
R212	QRD141J-333S	33 kΩ	"	"
R213	QRD141J-472S	4.7 kΩ	"	"
R214	QRD141J-472S	"	"	"
R221	QRD141J-333S	33 kΩ	"	"
R222	QRD141J-333S	"	"	"
R223	QRD141J-472S	4.7 kΩ	"	"
R224	QRD141J-472S	"	"	"
R225	QRD141J-333S	33 kΩ	"	"
R226	QRD141J-333S	"	"	"
R227	QRD141J-102S	1 kΩ	"	"
R228	QRD141J-102S	"	"	"
R229	QRD141J-471S	470 Ω	"	"
R230	QRD141J-471S	"	"	"
R231	QRD141J-104S	100 kΩ	"	"
R232	QRD141J-104S	"	"	"
R233	QRD141J-913S	91 kΩ	"	"
R234	QRD141J-913S	"	"	"
R235	QRD141J-184S	180 kΩ	"	"
R236	QRD141J-184S	"	"	"
R237	QRD141J-473S	47 kΩ	"	"
R238	QRD141J-473S	"	"	"
R239	QRD141J-272S	2.7 kΩ	"	"
R240	QVP4A0B-103	10 kΩ	"	Variable
R241	QRD141J-184S	180 kΩ	1/4 W	Carbon
R242	QRD141J-183S	18 kΩ	"	"
R243	QRG129J-560	56 Ω	1/2 W	Oxide Metal Film
R244	QRG129J-222	2.2 kΩ	"	"

Resistors

Item No.	Part Number	Rating		Description
R301	QRD141J-152S	1.5 kΩ	1/4 W	Carbon
R302	QRD141J-103S	10 kΩ	"	"
R303	QRD141J-272S	2.7 kΩ	"	"
R304	QRD141J-561S	560 Ω	"	"
R305	QRD141J-331S	330 Ω	"	"
R306	QRD141J-151S	150 Ω	"	"
R307	QRD141J-681S	680 Ω	"	"
R308	QRD141J-103S	10 kΩ	"	"
R309	QRD141J-103S	"	"	"
R310	QRD141J-472S	4.7 kΩ	"	"
R311	QRD141J-224S	220 kΩ	"	"
R312	QRD141J-683S	68 kΩ	"	"
R313	QRD141J-222S	2.2 kΩ	"	"
R314	QRD141J-472S	4.7 kΩ	"	"
R315	QRD141J-102S	1 kΩ	"	"
R316	QRD141J-473S	47 kΩ	"	"

Others

Item No.	Part Number	Rating	Description
	E03572-007C E03732-012A E03757-001 E33535-004 E49784-002		Antenna Terminal 12 Pins Plug Variable Tuning Capacitor Shield Cover Connect Pin
TC3	QAT3001-005		Trimmer
CF121	E03357-008		Ceramic Filter
CF122	E03357-008		"
CF123	E03357-008		"
CF301	E03613-008		AM Ceramic Filter
LC221	E03427-013		Low Pass Filter
LC222	E03427-013		"


} These filters must be used in the same rank. The kit number of these filters is PC016. Please order in this kit number.

NOTE

FM DE-EMPHASIS Network (TFM914GUA1)


Item No.	Part Number	
	75 μsec	50 μsec
C223	QFP31HG-102	QFP31HG-102
C224	QFP31HG-102	QFP31HG-102
C225	QFP31HJ-511	Open
C226	QFP31HJ-511	Open

10. JR-S301 Schematic Diagram

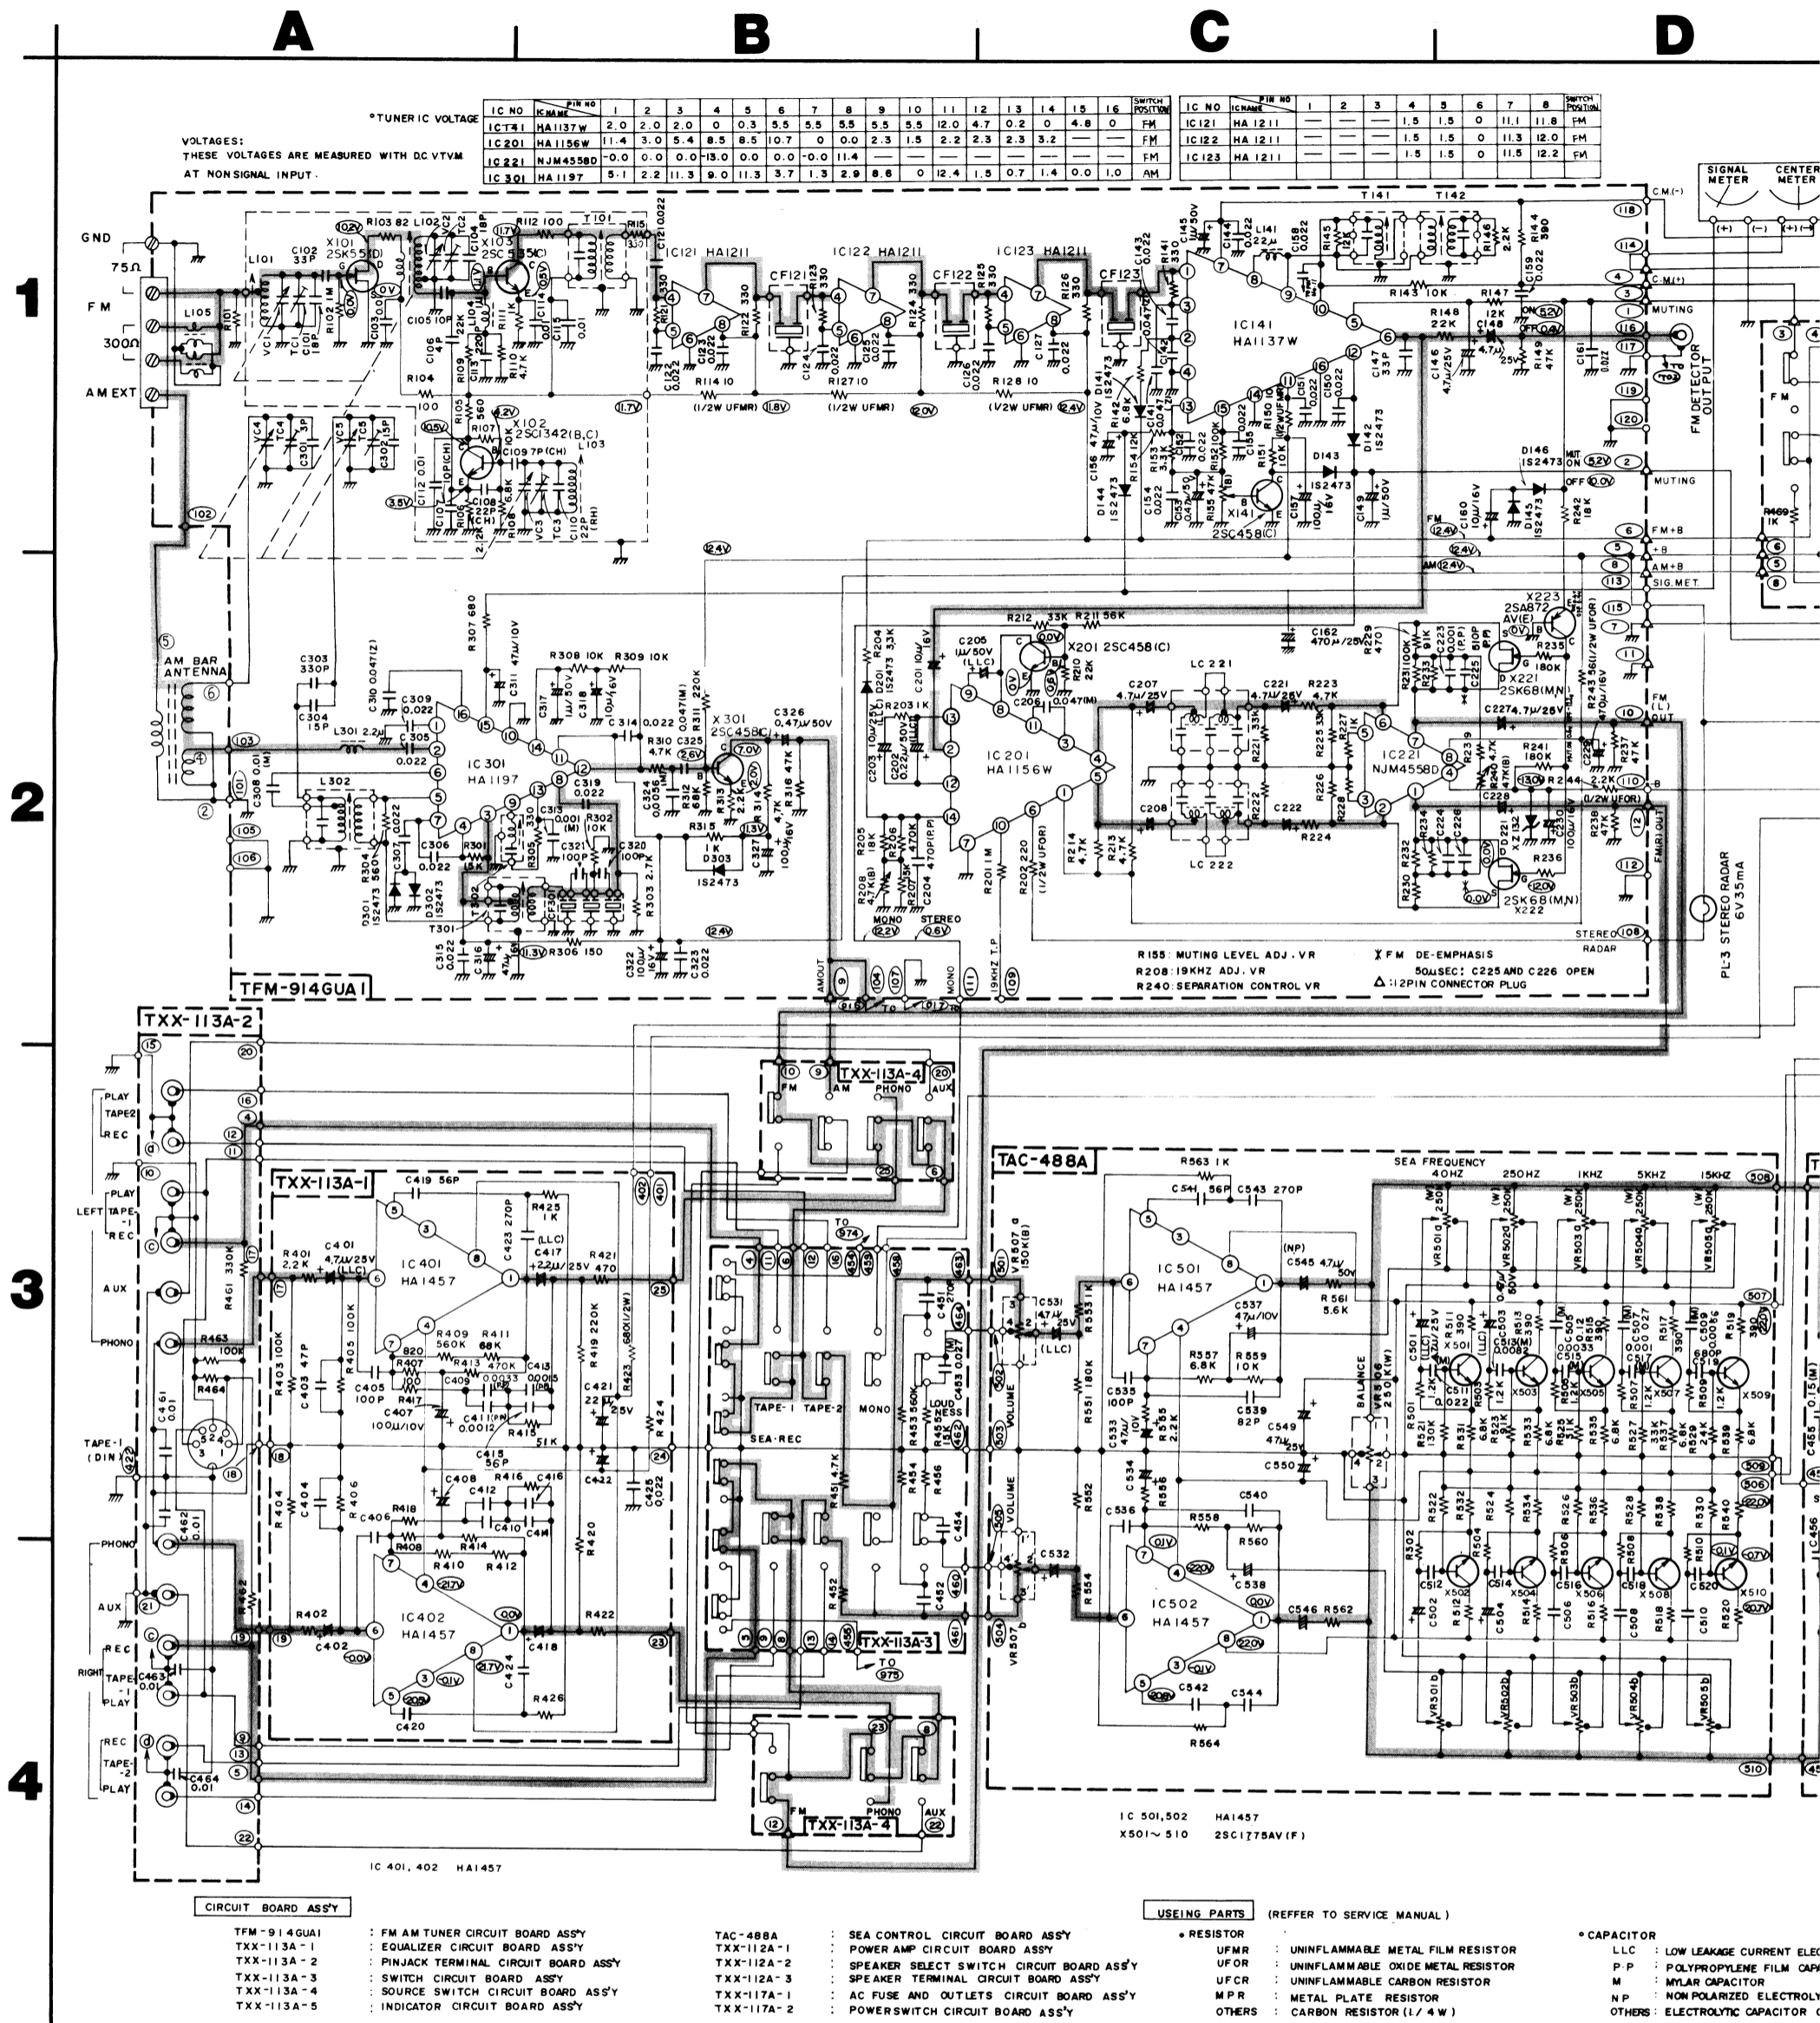

Printed Circuit Board Ass'y Locations

P.C. Board Ass'y	Description	Page
TXX-112A	Audio P.C. Board Ass'y	13
TXX-113A	Equalizer Amp., Switches and Indicator P.C. Board Ass'y	18
TXX-117A (or TXX-130A)	AC Block P.C. Board Ass'y	21
TAC-488A	S.E.A. (Sound Effect Amp.) P.C. Board Ass'y	22
TFM914GUA1	FM/AM Tuner P.C. Board Ass'y	25

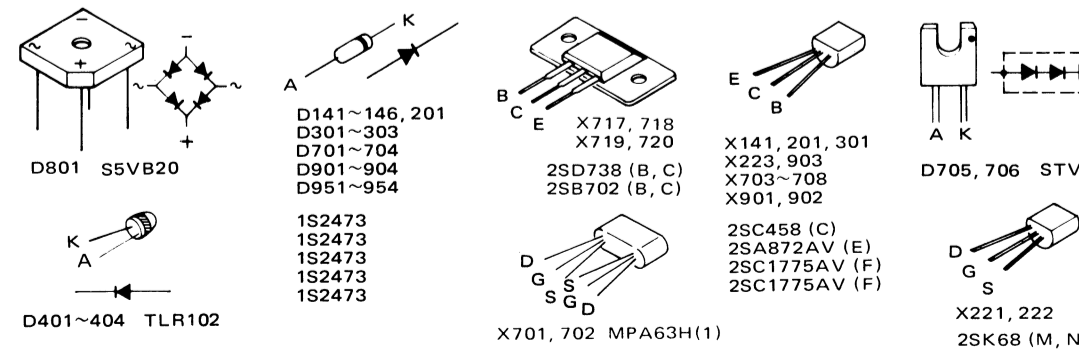


D

E

F

1	2	3	4	5	6	7	8	SWITCH POSITION
			1.5	1.5	0	11.1	11.8	FM
			1.5	1.5	0	11.3	12.0	FM
			1.5	1.5	0	11.5	12.2	FM

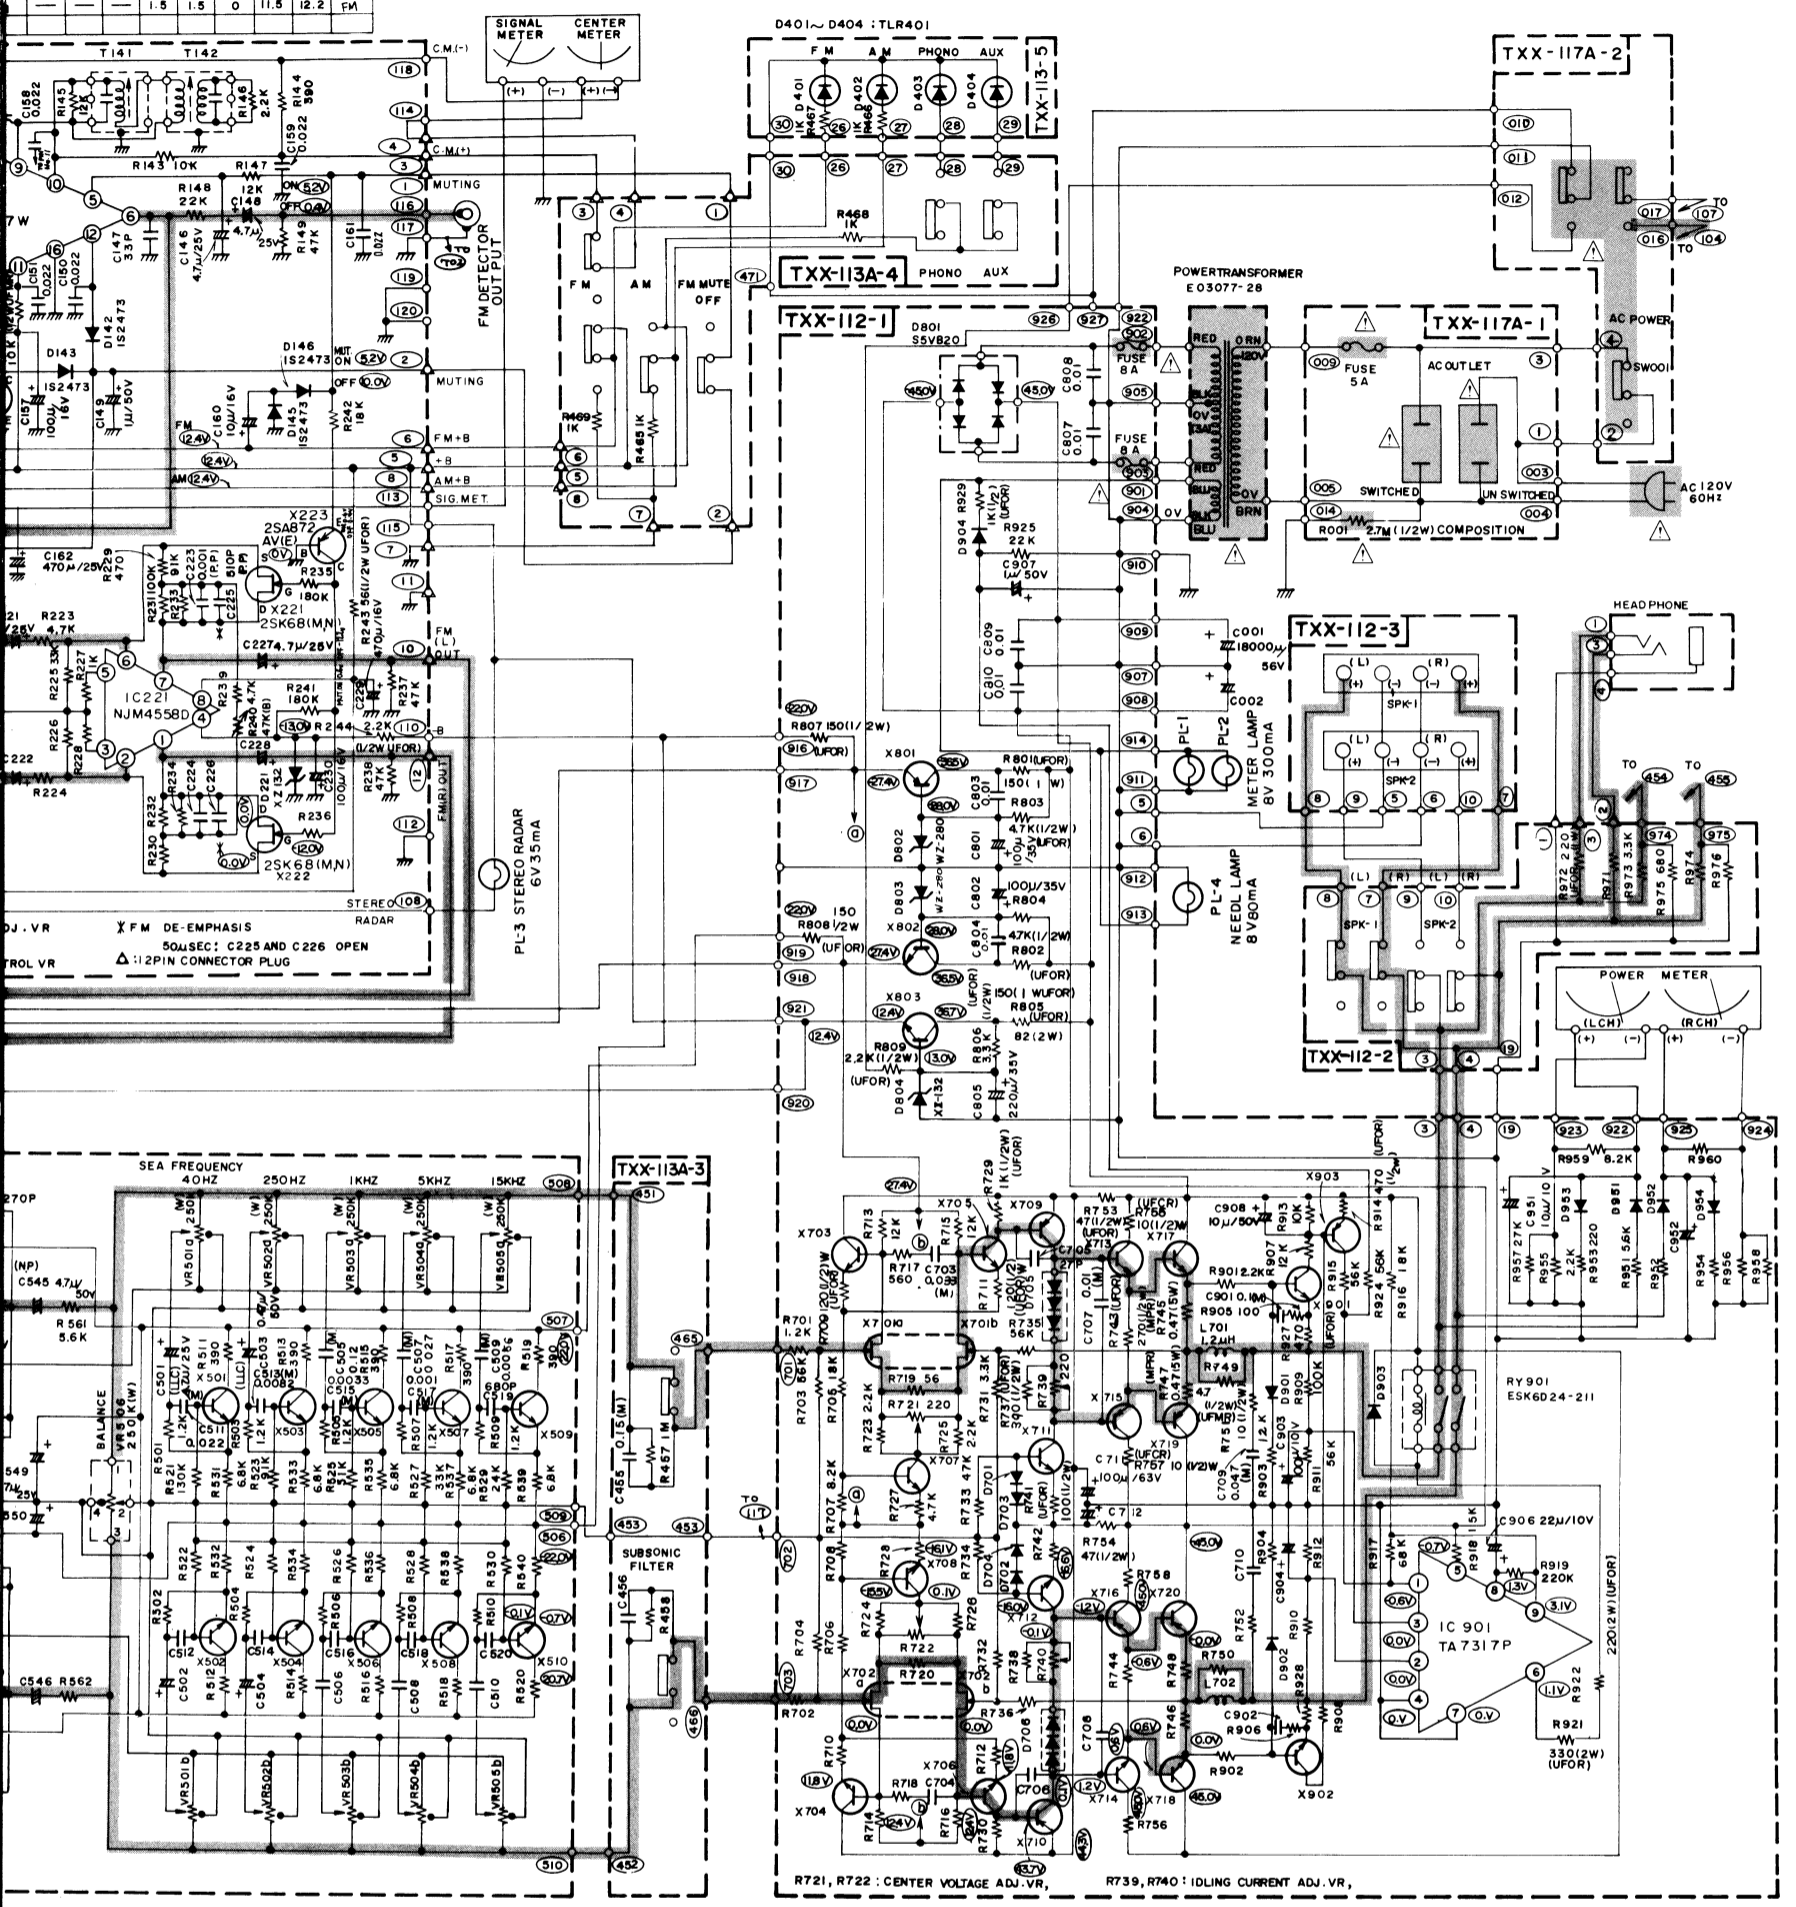

1

2

3

4

REFER TO SERVICE MANUAL)

- UNFLAMMABLE METAL FILM RESISTOR
- UNFLAMMABLE OXIDE METAL RESISTOR
- UNFLAMMABLE CARBON RESISTOR
- METAL PLATE RESISTOR
- CARBON RESISTOR (1/4 W)

- * CAPACITOR
- LLC : LOW LEAKAGE CURRENT ELECTROLYTIC CAPACITOR
 - P P : POLYPROPYLENE FILM CAPACITOR
 - M : MYLAR CAPACITOR
 - N P : NON POLARIZED ELECTROLYTIC CAPACITOR
 - OTHERS : ELECTROLYTIC CAPACITOR OR CERAMIC CAPACITOR

X701, 702	MPA63H(1)	X901, 902	2SC1775AV(F)
X703~708	2SC1775AV(F)	X903	2SA872AV(E)
X709, 710	2SA899(B,V)	D901~904	1S2473
X711, 712	2SC1904(B,V)	IC901	TA7317P
X713, 714	2SD669A(B,C)	D951~954	1S2473
X715, 716	2SB649A(B,C)	X801	2SB514V(D,E)
X717, 718	2SD738(B,C)	X802, 803	2SD330V(D,E)
X719, 720	2SB702(B,C)	D801	8SVB20
		D802, 803	WZ-280
		D804	XZ-132

CAUTION TABLE


Apply to:	Serial Number over 02066	Serial Number 00066 ~ 02065			
Item No.	Part Number	Rating	Part Number	Rating	
Transistors	X701	MPA63H(1)	0.2 W	2SK129	0.25 W
	X702	MPA63H(1)	0.2 W	2SK129	0.25 W

The serial numbers shown in table are pointed out the last five digits of the serial number located on the rear panel.
For example, 02066 → □□□02066

D

E


F

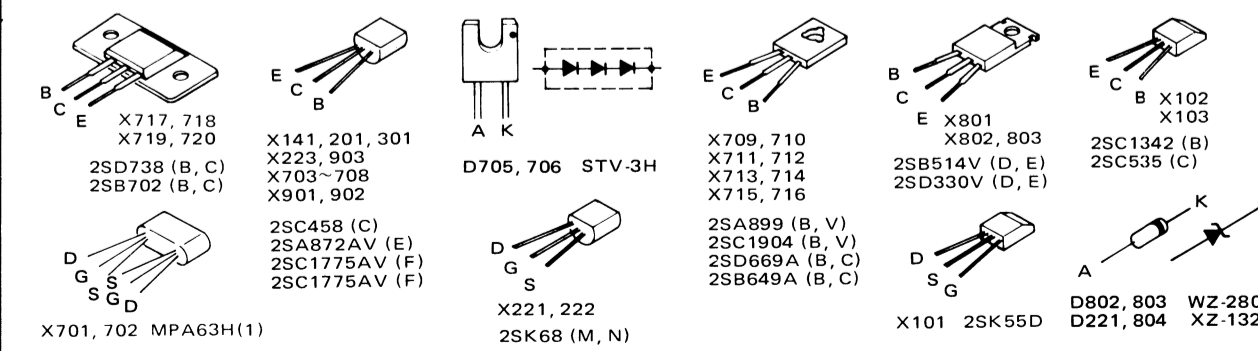

Notes:

- Parts in red indicate transistors or ICs.
- indicates signal path.
- indicates positive B power supply.
- indicates negative B power supply.
- When replacing the parts in the darkened area and those marked with Δ , be sure to use the designated parts to ensure safety.
- This is the standard circuit diagram.
The design and contents are subject to change without notice.



IC BLOCK DIAGRAM

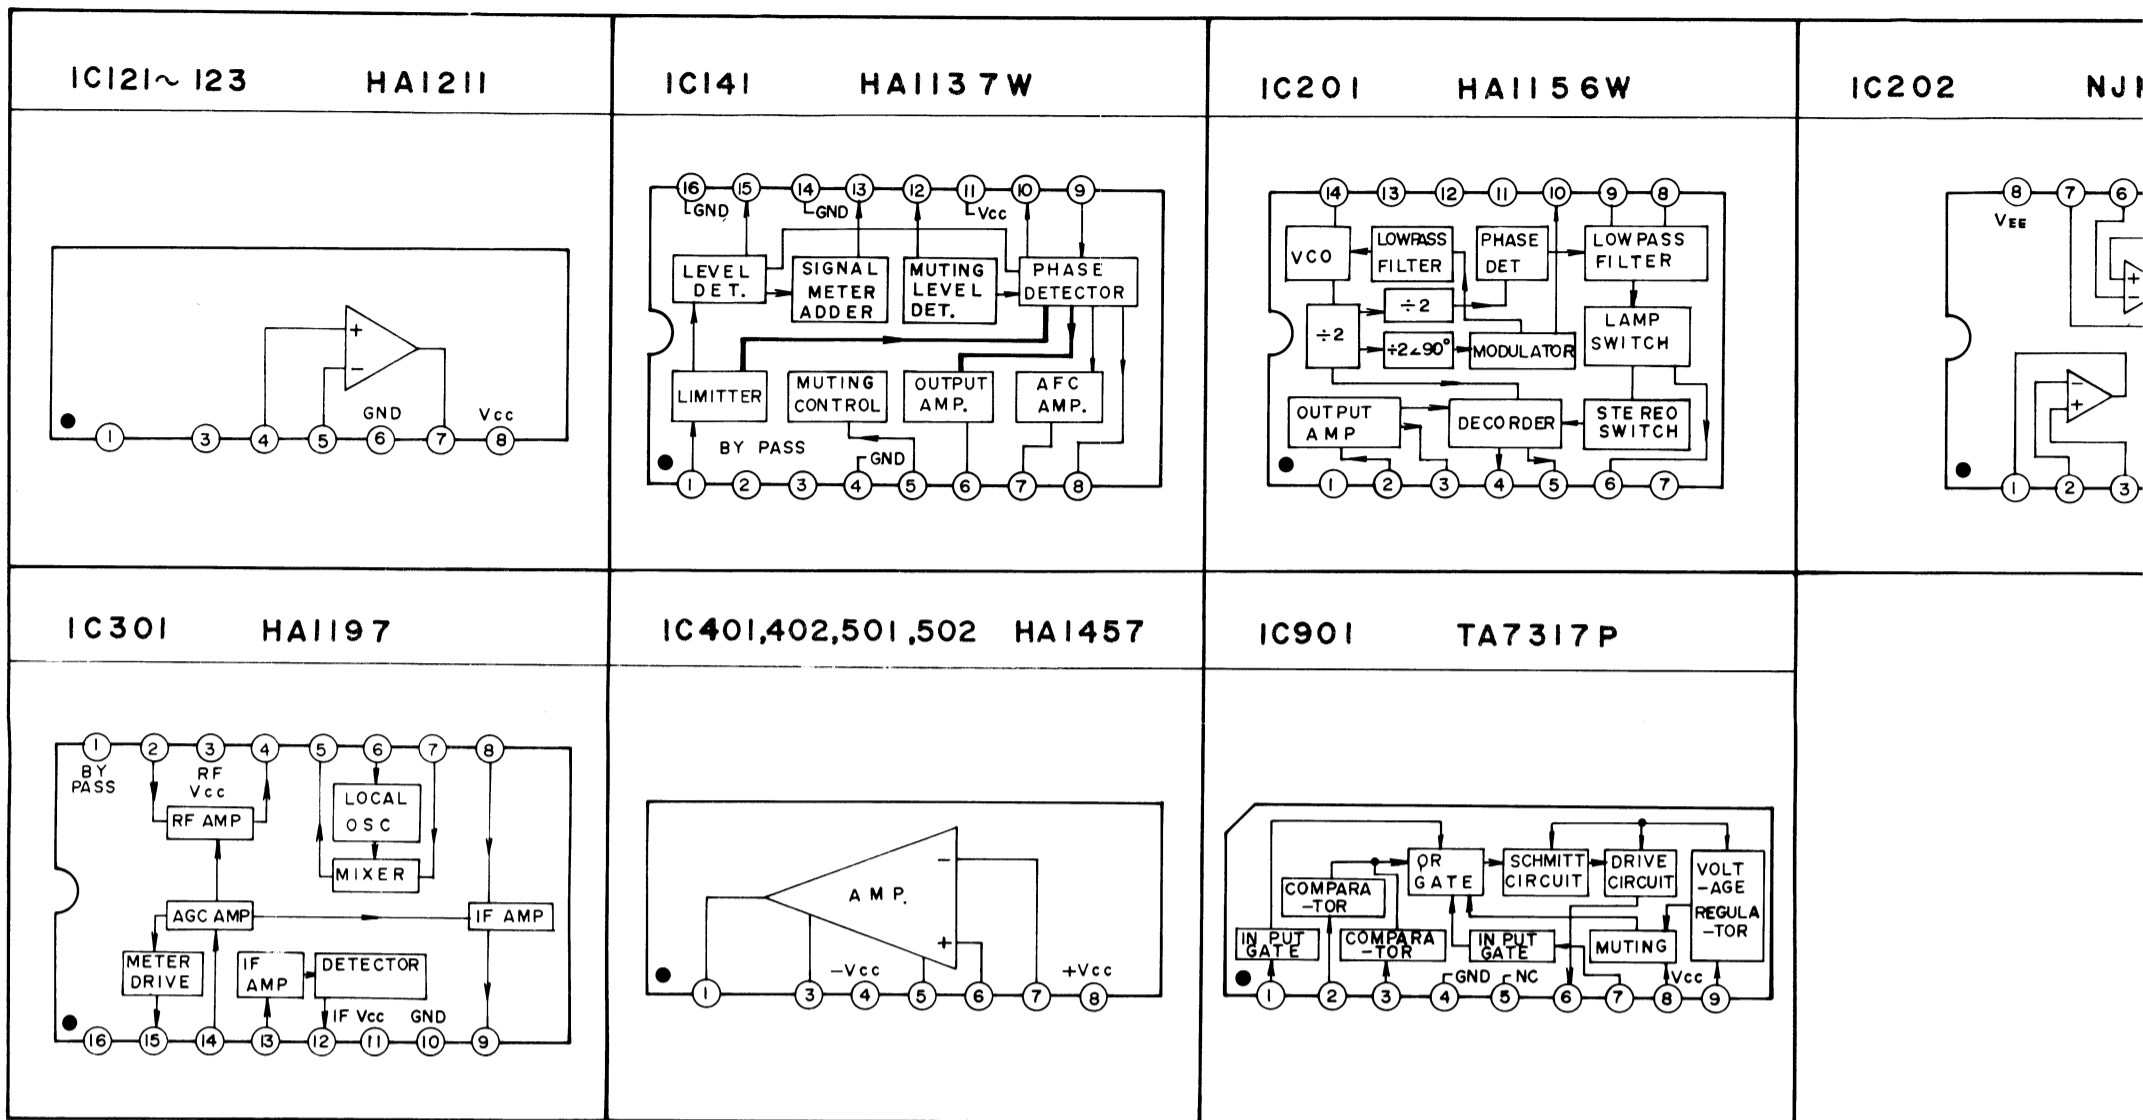

AC POWER SUPPLY BLOCK AND FM DE-EMPHASIS


(E, A, BS) (E) FOR EUROPE; AC 220V, 50Hz ~. FM DE-EMPHASIS : 50μ SEC.
 (A) FOR AUSTRALIA; AC 240V, 50Hz ~. FM DE-EMPHASIS : 50μ SEC.
 (BS) FOR UK; AC 240V, 50Hz ~. FM DE-EMPHASIS : 50μ SEC.

(U, P) (U) FOR OTHER COUNTRIES; FM DE-EMPHASIS : 75μ SEC.
 (P) FOR PACEX; FM DE-EMPHASIS : 75μ SEC.








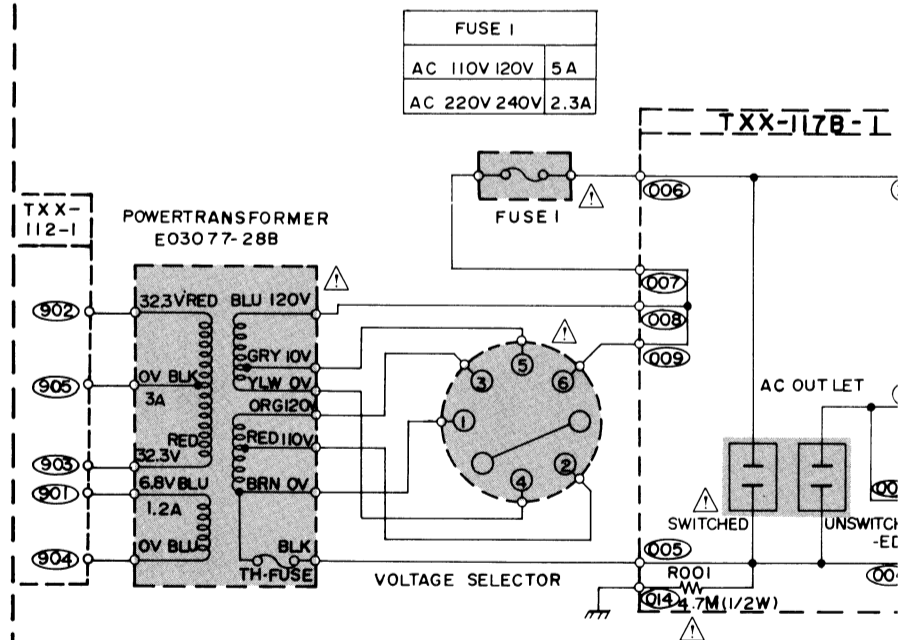
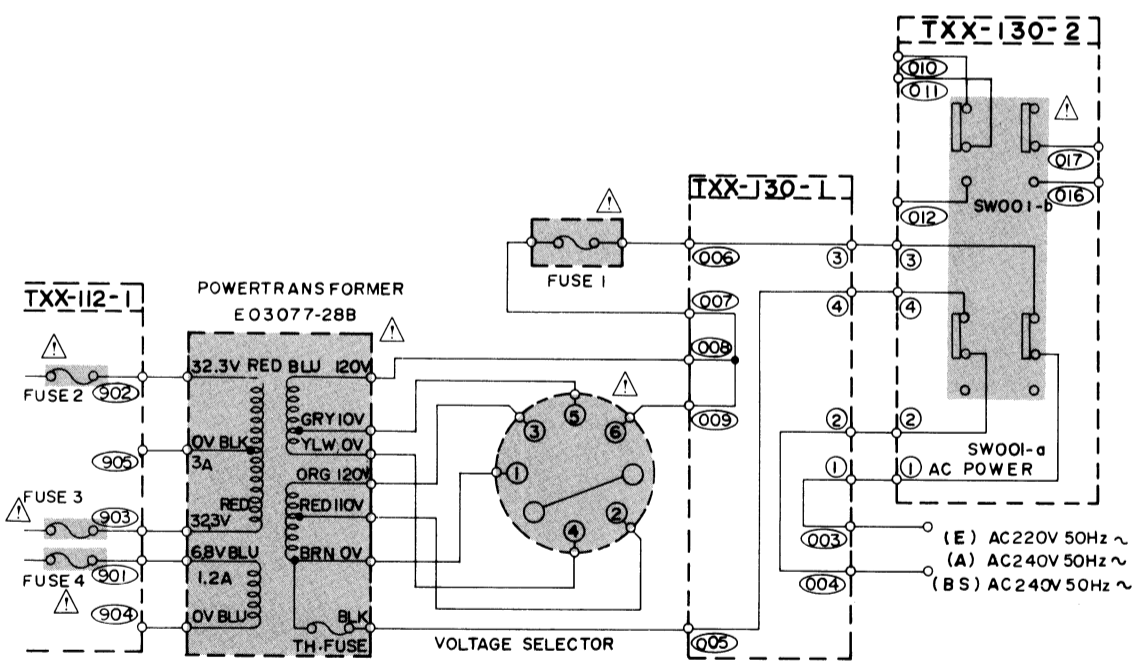


	TXX-112	TXX-130	FUSE1	FUSE2	FUSE3	FUSE4
(E) EUROPE	TXX-112B	TXX-130(A)	2.5AT	6.3AT	6.3AT	2AT
(A) AUSTRALIA	TXX-112B	TXX-130(A)	2.5AT	6.3AT	6.3AT	2AT
(BS) FOR UK	TXX-112B	TXX-130(B)	2.5AT	6.3AT	6.3AT	2AT

VOLTAGE SELECTOR CONNECTION

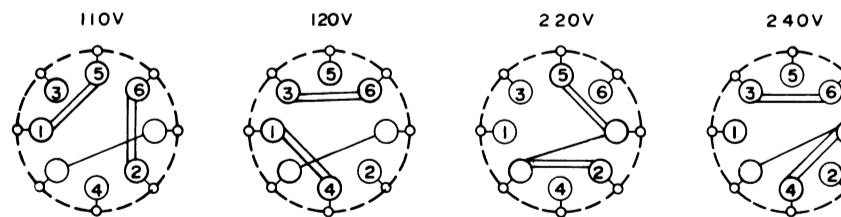



TRANSISTOR AND DIODE LEAD IDENTIFICATION

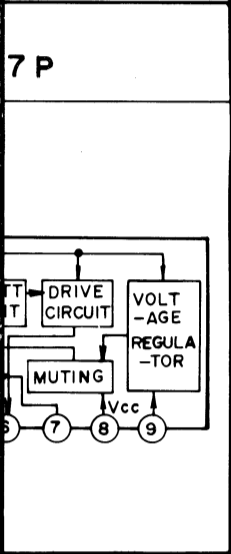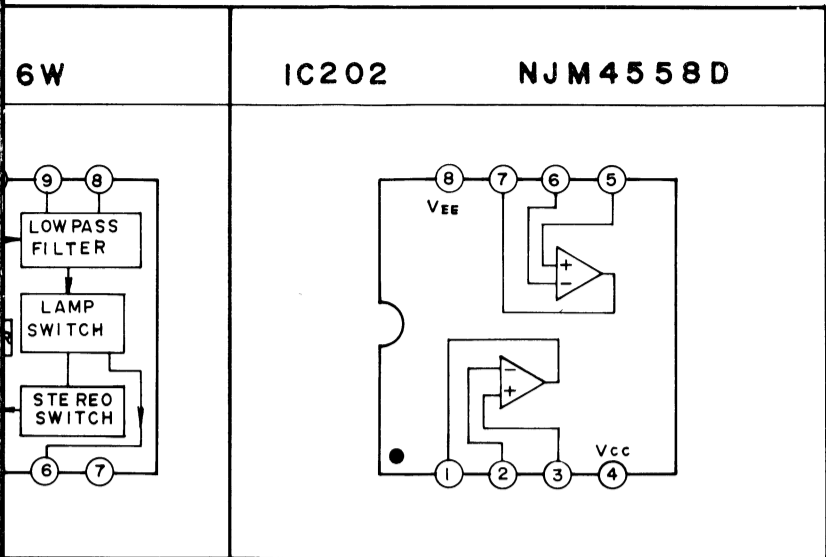


DE-EMPHASIS

FOR COUNTRIES; FM DE-EMPHASIS : 75μ SEC.
X; FM DE-EMPHASIS : 75μ SEC.

(C) FOR CANADA; AC 120V, 60Hz. FM DE-EMPHASIS : 75μ SEC.

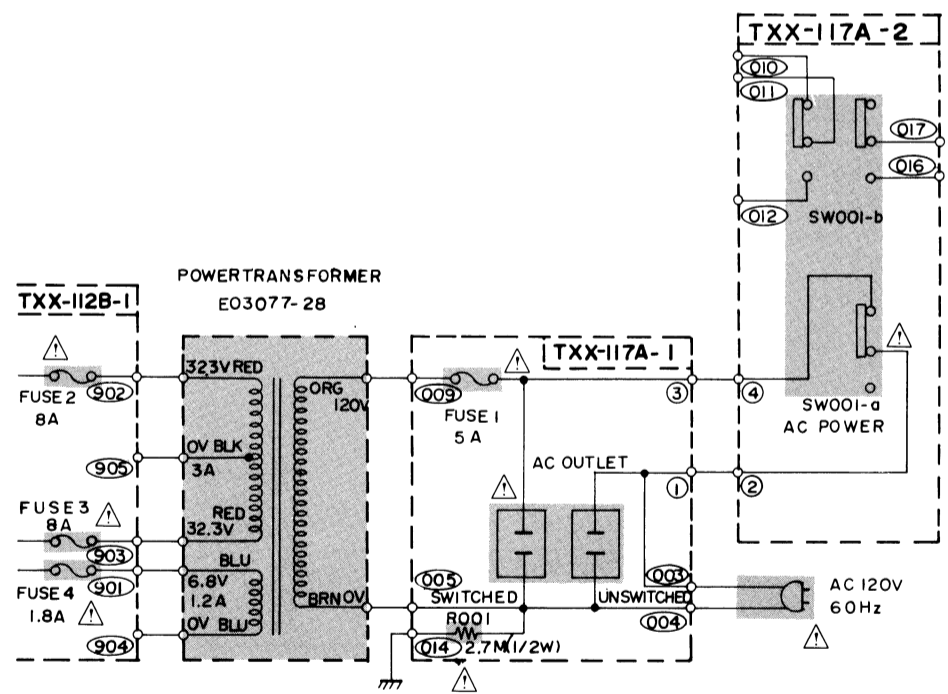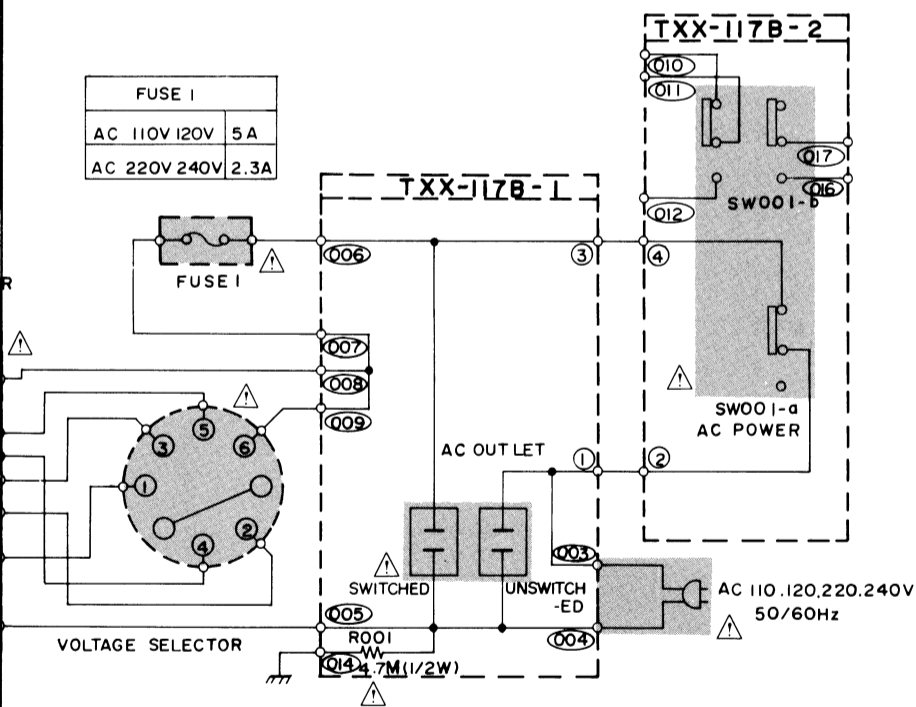

FOR CONNECTION

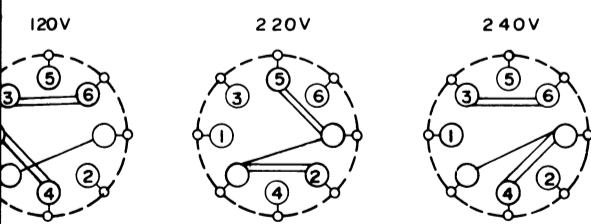

11. Packing Materials and Part Numbers












Fig. 30

12. Accessories List

Item No.	Part Number	Description	Q'ty
1	See back page	Instruction Book	1
2	See back page	Warranty Card	1
3	E64207-002	Envelope for Instruction Book and Others	1
4	E03614-002	FM Antenna	1
5	BT20023	Service Procedures (U.S.A. only)	1
6	BT20024	"Do It Better" (U.S.A. only)	1
7	QMF60R1-5R0	5 A Fuse (U.S. Military Market and Other Countries only)	1
8	QMF60R1-2R3	2.3 A Fuse (U.S. Military Market and Other Countries only)	1
9	E7958-N	Fuse Lavel (U.S. Military Market and Other Countries only)	1
10	E64208-001	Envelope for Fuses (U.S. Military Market and Other Countries only)	1
11	E04056	Siemes Plug (U.S. Military Market and Other Countries only)	1

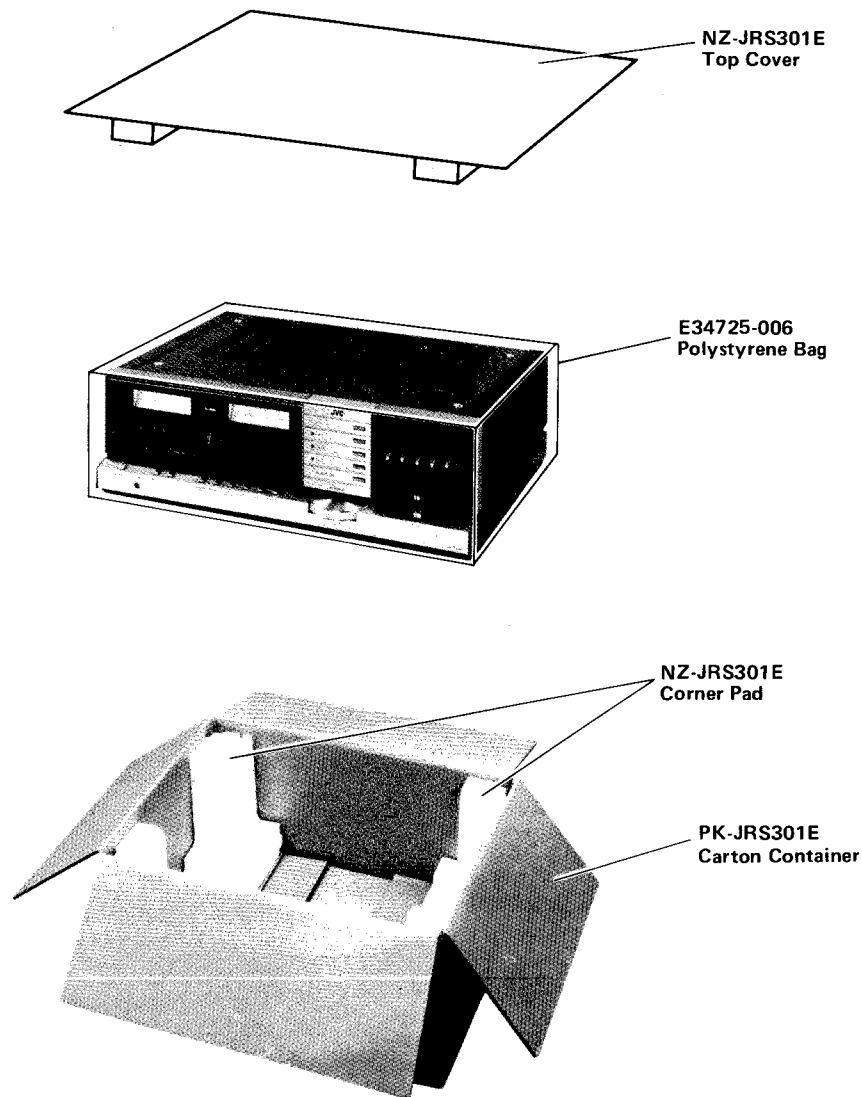13. Parts List with Specified Numbers for Designated Areas

Page	Item No.	Description	U.S.A.	CANADA	U.S. Military Market & Other Countries	Europe	Australia	U.K.
6		Power Transformer 	E03077-28	E03077-28	E03077-28B	E03077-28B	E03077-28B	E03077-28BBS
8		AC Block						
		P.C. Board Ass'y 	TXX-117A	TXX-117A	TXX-117B	TXX-130A	TXX-130A	TXX-130BBS
6		Audio P.C. Board Ass'y	TXX-112A	TXX-112B	TXX-112A	TXX-112C	TXX-112C	TXX-112C
8		Power Cord 	QMP1200-244	QMP1200-244	QMP1200-244	QMP3910-244	QMP2610-200	QMP9017-008BS
8		Fuse Socket 	—	—	QMG0201-003	QMG0301-003	QMG0301-003	QMG0301-003BS
		Voltage Selector 	—	—	QSR0085-001	QSR0085-001	QSR0085-001	QSR0085-001BS
		Fuse Primary 	QMF61U1-5R0 (5 A)	QMF60R1-5R0 (5 A)	QMF60R1-5R0 (5 A)	QMF51A2-2R5 (2.5 AT)	QMF51A2-2R5 (2.5 AT)	QMF51A2-2R5BS (2.5 AT)
					QMF60R1-2R3 (2.3 A)			
		Secondary 1 	QMF61M2-8R0 (8 A)	QMF60R1-8R0 (8 A)	QMF60R1-8R0 (8 A)	QMF51A2-6R3 (6.3 AT)	QMF51A2-6R3 (6.3 AT)	QMF51A2-6R3BS (6.3 AT)
		Secondary 2 	—	QMF60R1-1R8 (1.8 A)	—	QMF51A2-2R0 (2 AT)	QMF51A2-2R0 (2 AT)	QMF51A2-2R0BS (2 AT)
32	1	Instruction Book	E30580-669A	E30580-670A	E30580-669A	E30580-670A	E30580-669A	E30580-670A
32	2	Warranty Card	BT20032	BT20025B	BT20032 (U.S. market)	—	BT20029	BT20013B

NOTE:  SAFETY PARTS

JVC

VICTOR COMPANY OF JAPAN, LIMITED, TOKYO, JAPAN