


SERVICE MANUAL

INTEGRATED STEREO AMPLIFIER

SANSUI AU-517/717

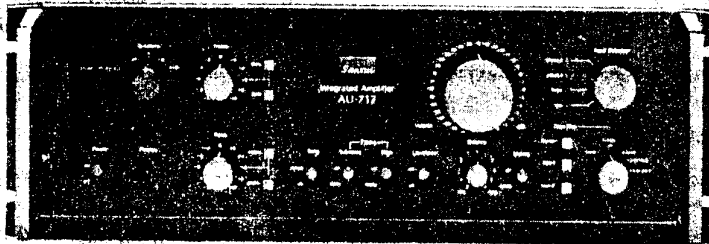

THE QUALITY OF
THIS MANUAL IS
THE BEST THAT
IS AVAILABLE

11, Maruli Road, Carbon,
Tel: 0602-870769



SANSUI ELECTRIC CO., LTD.

SPECIFICATIONS

AU-517

Power output	Min. RMS, both channels driven, from 20 to 20,000 Hz, with no more than 0.025% total harmonic distortion: 65 watts per channel into 8 ohms
Load impedance	8 ohms
Power bandwidth	20 to 20,000 Hz at or below rated min. RMS power output and total harmonic distortion
Total harmonic distortion (POWER AMP IN)	less than 0.025% at or below rated min. RMS power output
Intermodulation distortion (70 Hz: 7 kHz = 4:1 SMPTE method)	less than 0.025%
Frequency response (at 1 watt) (POWER AMP IN)	0 to 200,000 Hz +0 dB -3 dB
RIAA curve deviation (PHONO)	+0.2 dB -0.2 dB (20 to 20,000 Hz)
Damping factor	approximately 60 at 8 ohms load
Input sensitivity and impedances (1 kHz, for rated power output)	
PHONO	2.5 mV/47 kilohms (Max. input capability: 320 mV at 1 kHz, less than 0.01% harmonic distortion)
AUX, TAPE	150 mV/47 kilohms
Output level (1,000 Hz)	
TAPE REC (pin jack)	150mV/47 kilohms
PRE OUT	1V/47 kilohms
Channel separation (1 kHz, at rated power output)	
PHONO	better than 60 dB
AUX	better than 65 dB
Hum and noise (short-circuit, A-network)	
PHONO	78 dB
AUX	100 dB
Controls	
BASS	+10 dB (50 Hz)
TREBLE	+10 dB (15 kHz)
SUBSONIC FILTER	-3 dB (16 Hz), 6 dB/600
LOUDNESS (-30 dB)	9 dB at 50 Hz 7 dB at 10 kHz
Power requirements	
Power voltage	100, 120, 220, 240V (50/60Hz) 120V (Usable 110 - 130V) 60 Hz (for U.S.A. & Canada only)
Power consumption	
Maximum consumption	560 watts
Rated consumption	345 watts 420 VA
Dimensions	
	430 mm (16-15/16") W 108 mm (4-2/8") H 380 mm (15-3/8") D
Weight	16.5 kg (36.4 lbs) net 18.5 kg (40.8 lbs) packed

* Design and specifications subject to change without notice for improvements.

202
05
66

RTV servis Horvat

Tel: ++385-31-856-637

Tel/fax: ++385-31-856-139

Mob: 098-788-319


www.rtv-horvat-dj.hr

1. SPECIFICATIONS


AU-717

Power output	
Min. RMS, both channels driven, from 20 to 20,000 Hz, with no more than 0.025% total harmonic distortion	
85 watts per channel into 8 ohms	
Load impedance	8 ohms
Power bandwidth	20 to 20,000 Hz at or below rated min. RMS power output and total harmonic distortion
Total harmonic distortion (POWER AMP IN)	less than 0.025% at or below rated min. RMS power output
Intermodulation distortion (70 Hz: 7 kHz = 4:1 SMPTE method)	less than 0.025%
Frequency response (at 1 watt) (POWER AMP IN)	0 to 200,000 Hz +0 dB -3 dB
RIAA curve deviation (PHONO)	+0.2 dB -0.2 dB (20 to 20,000 Hz)
Damping factor	approximately 60 at 8 ohms load
Input sensitivity and impedance (1 kHz, for rated power output)	
PHONO	2.5 mV/47 kilohms (Max. input capability; 350 mV at 1 kHz, less than 0.01% total harmonic distortion)
AUX, TAPE	150 mV/47 kilohms
Output level (1,000 Hz)	
TAPE REC (pin jack)	150 mV/47 kilohms
PRE OUT	1 V/47 kilohms
Channel separation (1 kHz, at rated power output)	
PHONO	better than 60 dB
AUX	better than 65 dB
Hum and noise (short-circuit, A-network)	
PHONO	78 dB
AUX	100 dB
Controls	
BASS	±10 dB (50 Hz)
Tone selector	200, 400 Hz
TREBLE	±10 dB (15 kHz)
Tone selector	3, 6 kHz
SUBSONIC FILTER	-3 dB (16 Hz), 6 dB/oct
HIGH FILTER	-3 dB (10 kHz), 6 dB/oct
MUTING	-20 dB
LOUDNESS (-30 dB)	9 dB at 50 Hz 7 dB at 10 kHz
Power requirements	
Power voltage	100, 120, 220, 240V (50/60 Hz) 120V (Usable 110 - 130V) 60 Hz (for U.S.A. & Canada only)
Power consumption	
Maximum consumption	735 watts
Rated consumption	425 watts 500 VA
Dimensions	
	430 mm (16-15/16") W 168 mm (6-5/8") H 389 mm (15-3/8") D
Weight	
	17.8 kg (39.2 lbs) net 19.8 kg (43.7 lbs) packed

2. BLOCK DIAGRAM

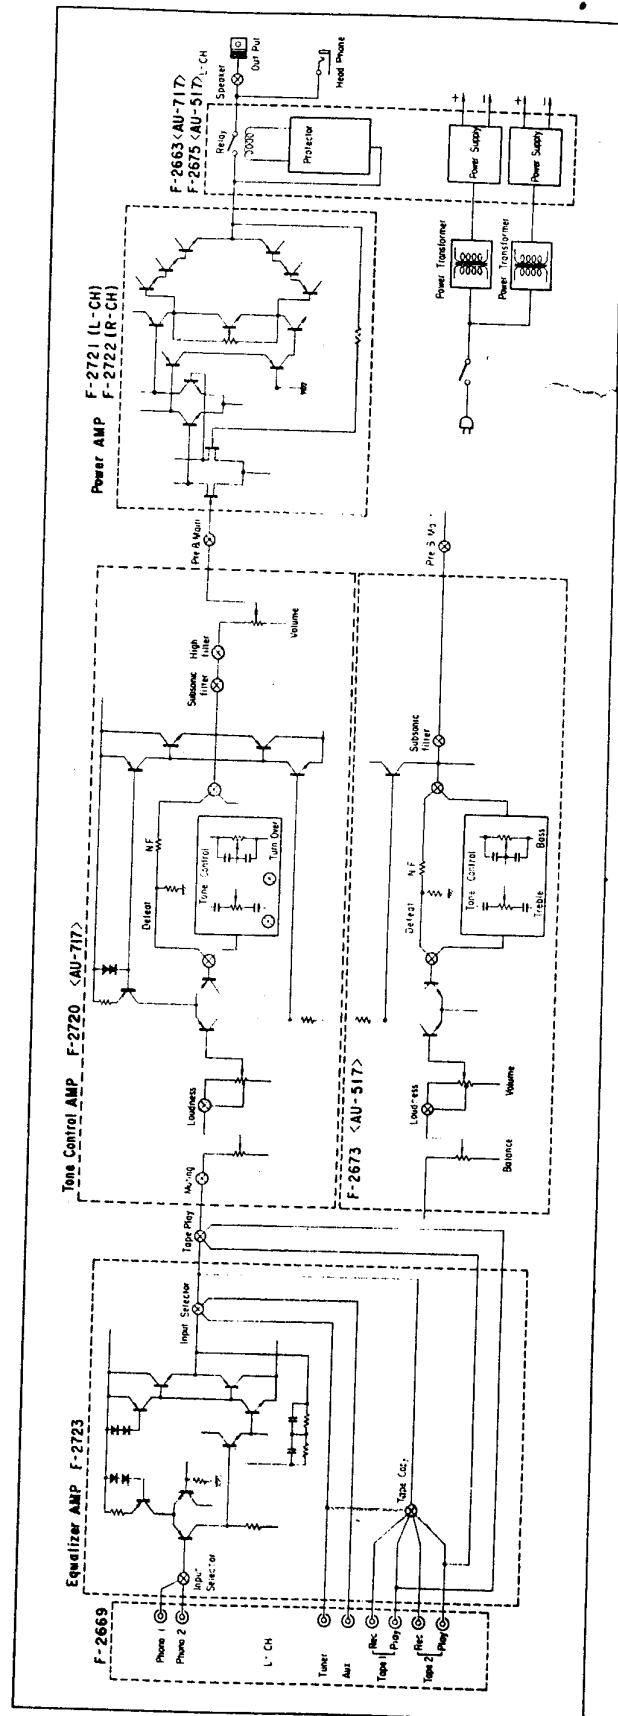

3. ADVANTAGE AND OPERATION OF POWER AMPLIFIER CIRCUITRY SECTION

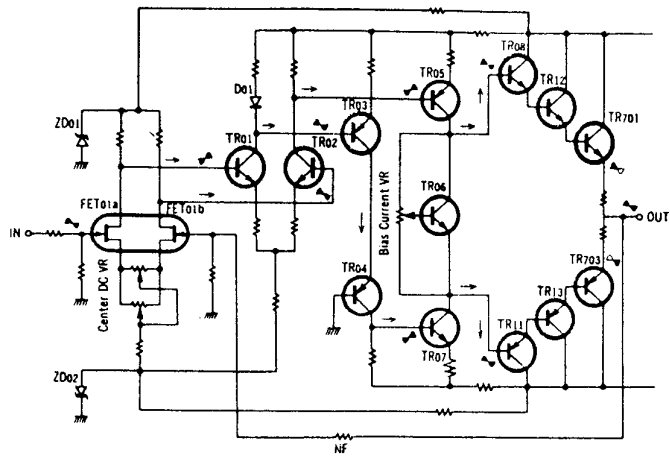

3-1. Advantage

- ◇ There is necessity not to decrease the phase response till DC range in order to increase the music signal response of extremely low frequency range. Therefore, this amplifier is employing no capacitors except ones for phase compensation, and has an almost perfect transient characteristics.
- ◇ The first stage FET (2SK97) is a dual FET of even characteristics and has a large Gm and no-leakage current at normal temperature.
To avoid the influence by temperature drift, such as center voltage (0V) deviation, this FET is used as differential amplifier and operates at cross point which is the optimum point of drain current (at about 3mA) against the temperature drift.
- ◇ Transistors, TR05 and TR07, the push-pull pre-driver stage functions as current differential amplifier that the stabilized operation can be obtained. In addition, the collector current of these transistors is enough high to make linearity excellent.
- ◇ Since this Amplifier employs phase advancer circuits [C06, C08, C15, R29, C16 and R30], which have not been frequently used, to compensate the phase characteristics on high frequency range and is also made to have enough

current on each stage to increase the through-rate, the performance on high frequency range is conspicuously improved.

◇ To avoid the voltage deviation, regulated power supply circuit composed of ZD01, ZD02 is employed.

3-2. Operation

The use of differential amplification at first stage dual FET, (FET01, FET02) and connection of the FET to the differential amplifier composed of TR01, TR02, make possible to obtain enough gain and remarkable low distortion. The output signals of TR01 and TR02 are antiphase. The output signal of TR02 adds to TR05, on the other hand, the output phase of TR01 is inverted by TR03, then, it becomes input signal of TR04 and TR07 which are cascaded connection. The output signals at TR05 and TR07 are inphase that the operation of this stage is push-pull drive and current differential amplification. The power amplifier of the final stage is composed of SEPP (Single Ended Push-Pull) symmetry complementary in 3-stage darlington connection type. TR09 and TR10 are composing current limiter circuit to protect power transistor from break-down by overload.

4. ADJUSTMENTS



4-1. Driver Circuit Board Adjustments (See the picture of top view on page 3.)

- Note: 1. Master Volume.....Minimum
 2. Room Temperature.....
 3. For adjustment, run the unit for more than 3 minutes after the power is switched on.

STEP	SUBJECT	EQUIPMENT	MEASURE OUTPUT	ADJUST	ADJUST FOR	CONDITION
1.	DC 0V L-CH	DC Volt Meter	Speaker Terminal	F-2721 VR01, VR02	DC 0V ± 5mV	<ul style="list-style-type: none"> ◦ Set VR01 and VR02 to center position. ◦ Then, for the purpose of proceeding the accurate adjustment, set the voltage to 0 volt by VR01 first and VR02 next.
2.	DC 0V R-CH	Same as above	Same as above	F-2722 VR01, VR02	DC 0V ± 5mV	
3.	Bias Current I-CH	Same as above	TP Terminal (+) (-) of F-2721	F-2721 VR03	DC 20mV ± 1mV	<ul style="list-style-type: none"> ◦ By turning VR03 counterclockwise, the bias current is decreased gradually.
4.	Bias Current R-CH	Same as above	TP Terminal (+) (-) of F-2723	F-2722 VR03	DC 20mV ± 1mV	

5. OTHER PARTS

5-1. Top View

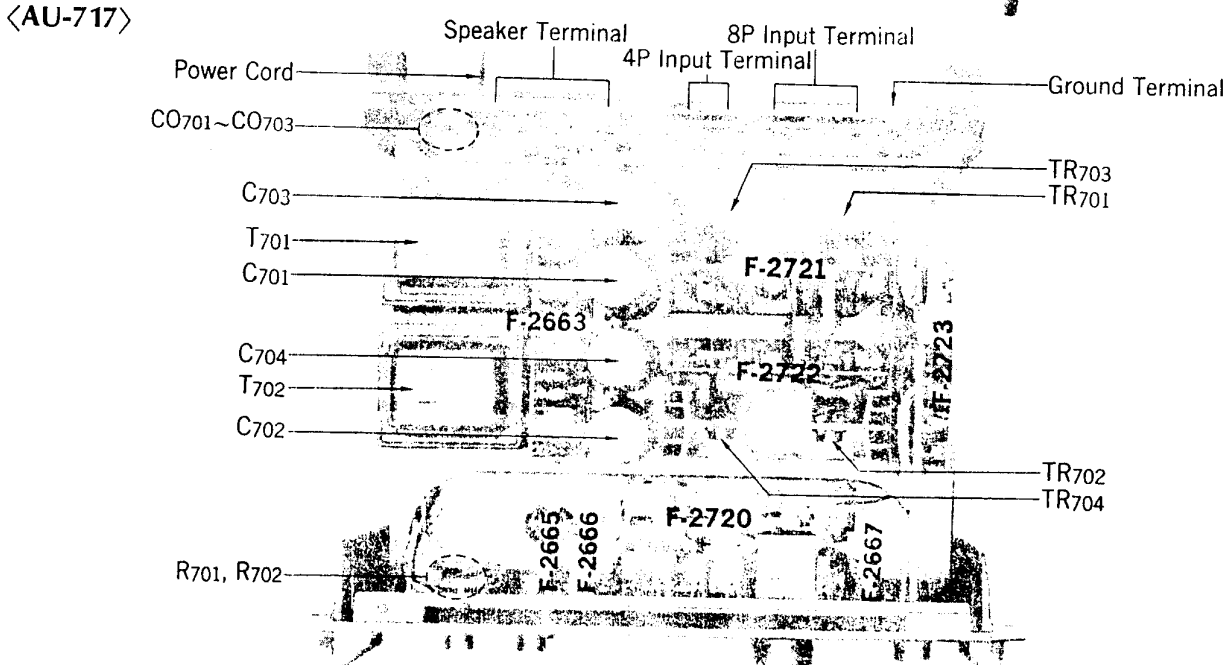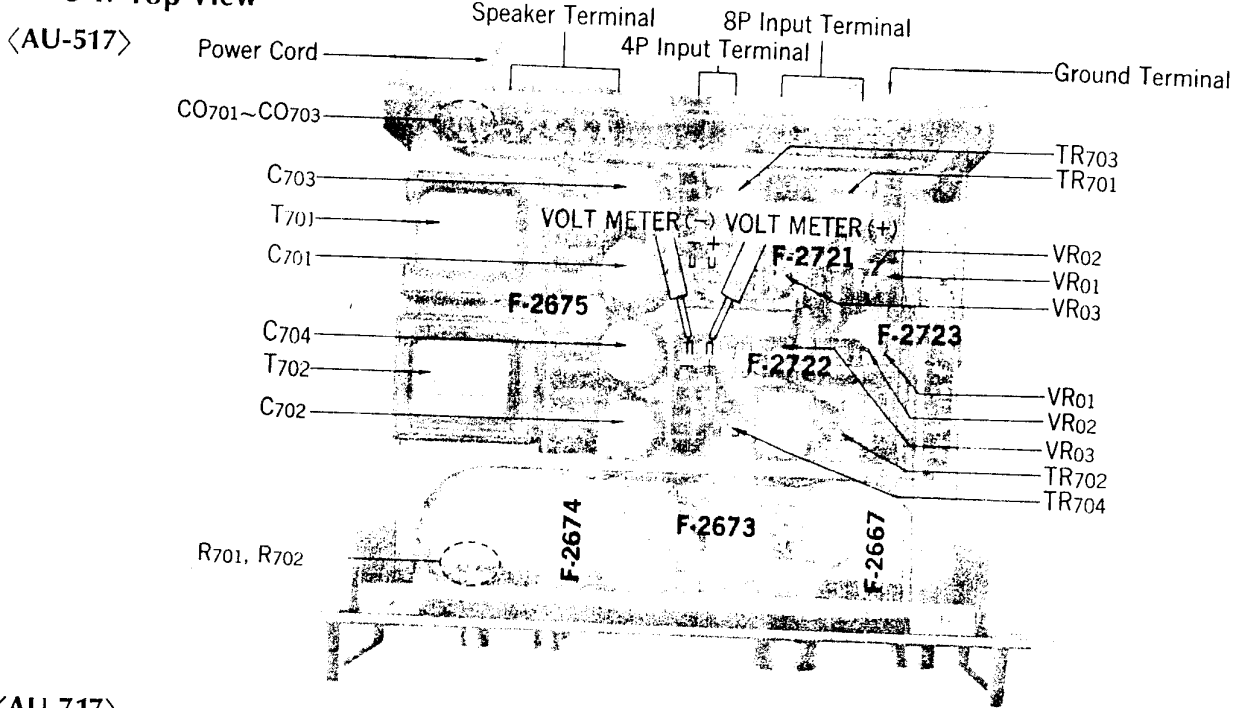


Parts List <AU-517/717>

Parts No.	Stock No.	Description
C703	0A37901	0.01µF 150V M.C.
C701-714	0602109	1.0µF 100V M.C.
R701, 702	0202221	220Ω 2W N.I.R.
CO701-703	2450060	AC Outlet XX
	5064280	AC Outlet EU, BS
	2290190	Speaker Terminal
	3800010	Power Cord XX
	3800190	Power Cord EU
	3800320	Power Cord BS
	2300060	Power Fuse Holder XX
	2300090	Power Fuse Holder EU, BS
	2410091	Voltage Selector Plug XX
	2410830	Voltage Selector Socket XX

Parts No.	Stock No.	Description
	2411240	Voltage Selector SW EU, BS
	2220052	Ground Terminal
AU-517 Only		
TR701, 702	0306450-2	25C1403A R, O, Y } Transistor
TR703, 704	0300830-2	25A745A R, O, Y }
C701-704	0559518	12000µF 63V E.C.
T701, 702	4002590	Power Transformer XX
	4002594	Power Transformer EU, BS
	4002592	Power Transformer UL, CSA
F701	0432270	3.5A 125V } Power Fuse XX
	0432500	7A 125V }
	0435140	2.5A Power Fuse EU, BS

Parts No.	Stock No.	Description
AU-717 Only		
TR701, 702	0305840-2	25C1116 R, O, Y } Transistor
TR703, 704	0300520-2	25A747 R, O, Y }
C701-704	0559520	13000µF 63V E.C.
T701, 702	4002580	Power Transformer XX
	4002584	Power Transformer EU, BS
	4002582	Power Transformer UL, CSA
F701	0432290	5A 125V } Power Fuse XX
	0434060	10A 250V }
	0435150	3.15A Power Fuse EU, BS

5-2. Front View <AU-717>

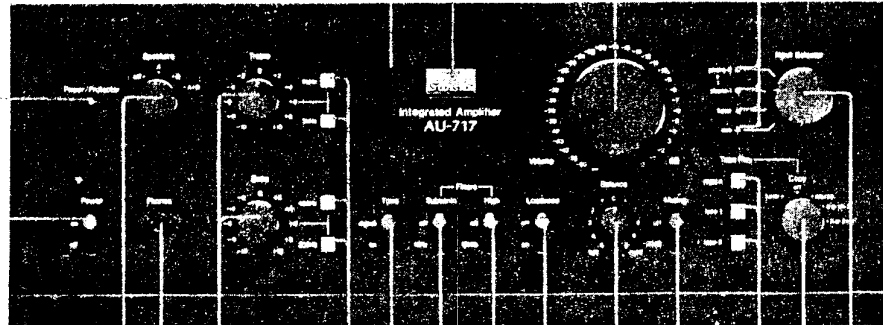

Parts List <AU-517/717>

Parts No.	Stock No.	Description	Parts No.	Stock No.	Description	Parts No.	Stock No.	Description	
1	5318850	N-7 Type Knob	10	5326620	Push Switch Knob	AU-717 Only	6	5326611	Lever Switch Knob
	1015170.1	250kΩ (MN) × 2 Balance Volume L=25 P=5		5286721	Knob Guide			1171130	Lever Switch, Loudnes
2	5318840	K-7 Type Knob		1131400	Push Switch, Tape Play		5326611	Lever Switch Knob	
	1015230.1	100kΩ (C) × 2 Treble, Bass Volume L=25 P=7	11	2430290	Head Phone Jack		1171130	Lever Switch, Subsonic Filter	
3	5318840	K-7 Type Knob	12	5006670	Bonnet		5318860	H-7 Type Knob	
	1101780.1	Rotary Switch, Speakers	13	5336400	Sansui Badge		1090280	150kΩ × 2 5kΩ × 2 Volume L=25 P=9	
4	5318840	K-7 Type Knob	14	0319110	Light Emitted Diode		5326611	Lever Switch Knob	
	1190410	Rotary Switch, Tape Copy	5507070	Leg	1171120		Lever Switch, Muting		
5	5318830	I-7 Type Knob	AU-517 Only				5326611	Lever Switch Knob	
	1190410	Rotary Switch, Input Selector	6	5326611	Lever Switch, Loudnes		1171130	Lever Switch Knob	
8	5326611	Lever Switch Knob	7	5326611	Lever Switch Knob	1171130	Lever Switch, High Filter		
	1171150	Lever Switch, Tone Defeat	15	5318860	H-7 Type Knob	5326620	Push Switch Knob		
9	5326611	Lever Switch Knob	19	1090250	150kΩ × 2 Volume L=25 P=7	5286721	Knob Guide		
	1171630	Lever Switch, Power	19	7007580	Front Panel Ass'y	1131400	Push Switch, Turn Over		
	1171610	Lever Switch, Power EU, BS	20	5058730	Bottom Plate	19	7007570	Front Panel Ass'y	
			20	5058740	Bottom Plate	20	5058730	Bottom Plate	
						21	0319110	Light Emitted Diode	

● Figures

Connectors & Pin Ass'y

Connectors

Type	Description	Stock No.
Type A (3~10 pins)		2 Pins 2420450
		3 Pins 2420460
Type B (2~6 pins)		3 Pins(REL) 2420650
		4 Pins 2420470
		5 Pins 2420480
		6 Pins 2420490

NOTE: Since stock number of female connectors (type B) with wires are not shown in each parts list of Complete circuit board, please refer to the above parts list when ordering the connector

Pin Ass'y

Type A (3~10 pins) 	Type B (3~10 pins) 	Type C (3~10 pins)
Type D (2~6 pins) 	Type E (2~6 pins) 	Type F (2~6 pins)

Abbreviations


C.R. : Carbon Resistor	E.C. : Electrolytic Capacitor
S.R. : Solid Resistor	BP.E.C.: Bi-Polar Electrolytic Capacitor
Ce.R. : Cement Resistor	C.C. : Ceramic Capacitor
M.R. : Metal Film Resistor	MI.C. : Mica Capacitor
F.R. : Fusing Resistor	O.C. : Oil Capacitor
N.I.R. : Non-Inflammable Resistor	P.C. : Polystyrene Capacitor
M.C. : Mylar Capacitor	T.C. : Tantalum Capacitor

7. SCHEMATIC DIAGRAM

7-1. AU-517 Power Supply Section

XX EU. BS Model Only

• La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suites d'améliorations éventuelles.
 • Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten
 • Design and specifications subject to change without notice for improvement

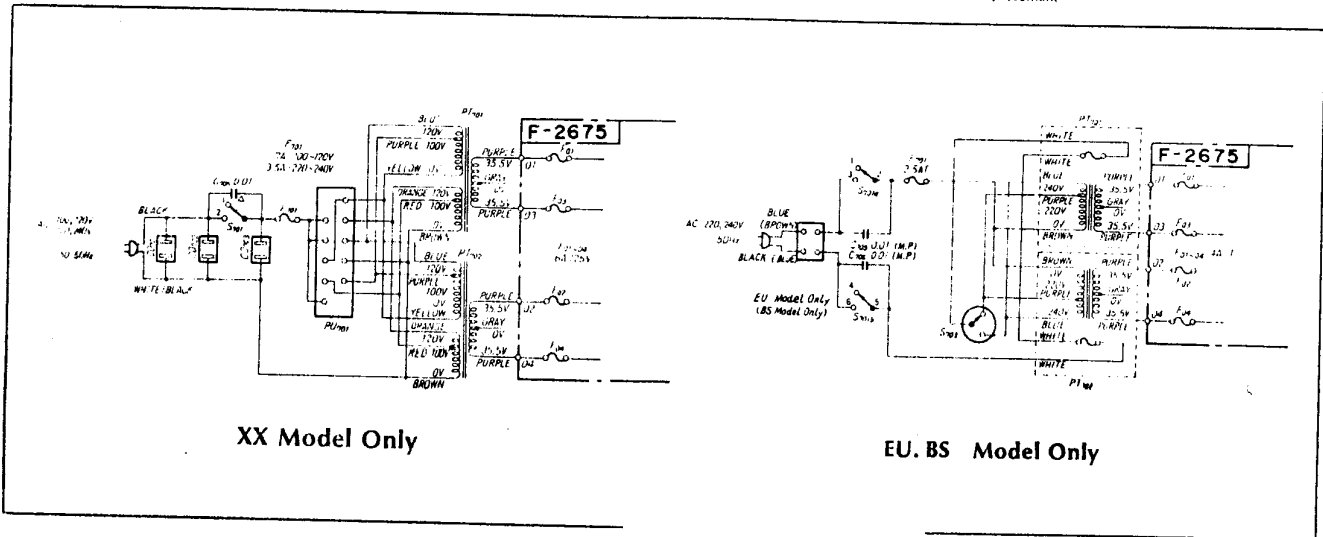


XX Model Only

EU. BS Model Only

7-2. AU-717 Power Supply Section

XX EU. BS Model Only

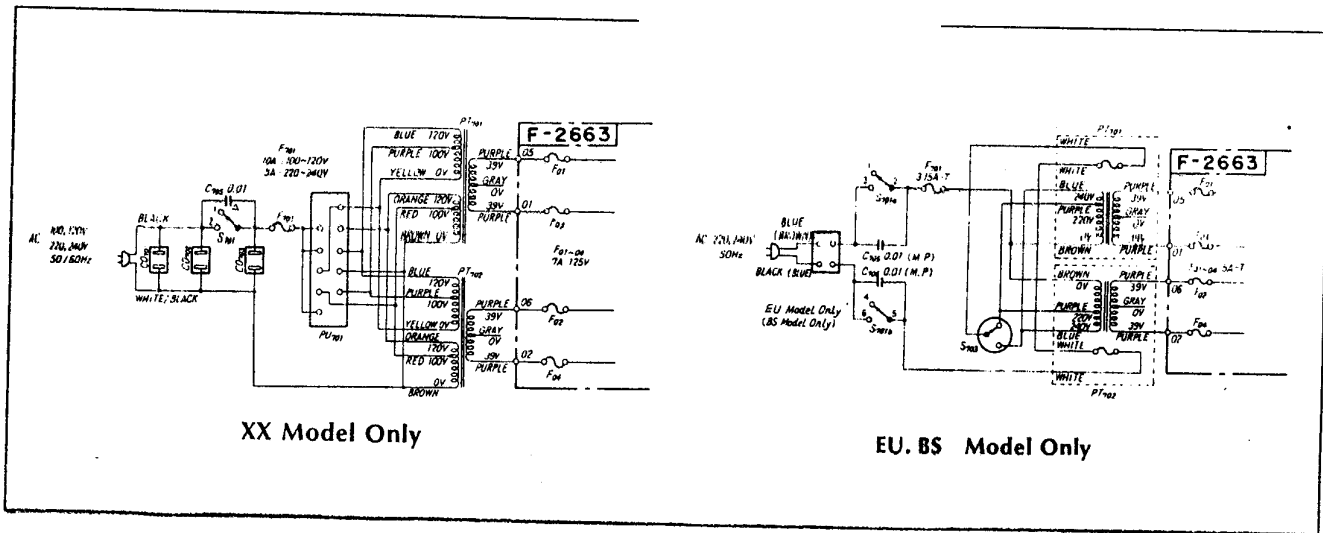

XX Model Only


EU. BS Model Only

NOTE:


- AS to U.L., C.S.A., B.S., ES and XX marked in the Parts Lists, note the followings:
- U.L., C.S.A.... Approved parts used in the unit which is applicable to the U.S. and Canada under safety standard.
- B.S. Approved parts used in the unit which is applicable to British under safety requirement.
- EU. Approved parts used in the unit which is applicable to Sweden, Denmark, Norway, Finland, West Germany, and Switzerland under safety requirement.
- XX Parts used in the unit which is applicable to other countries excepting mentioned above.

✳ In parts lists, parts with no above mark in of "Description" are all the same as XX marked parts.

7-3. AU-517

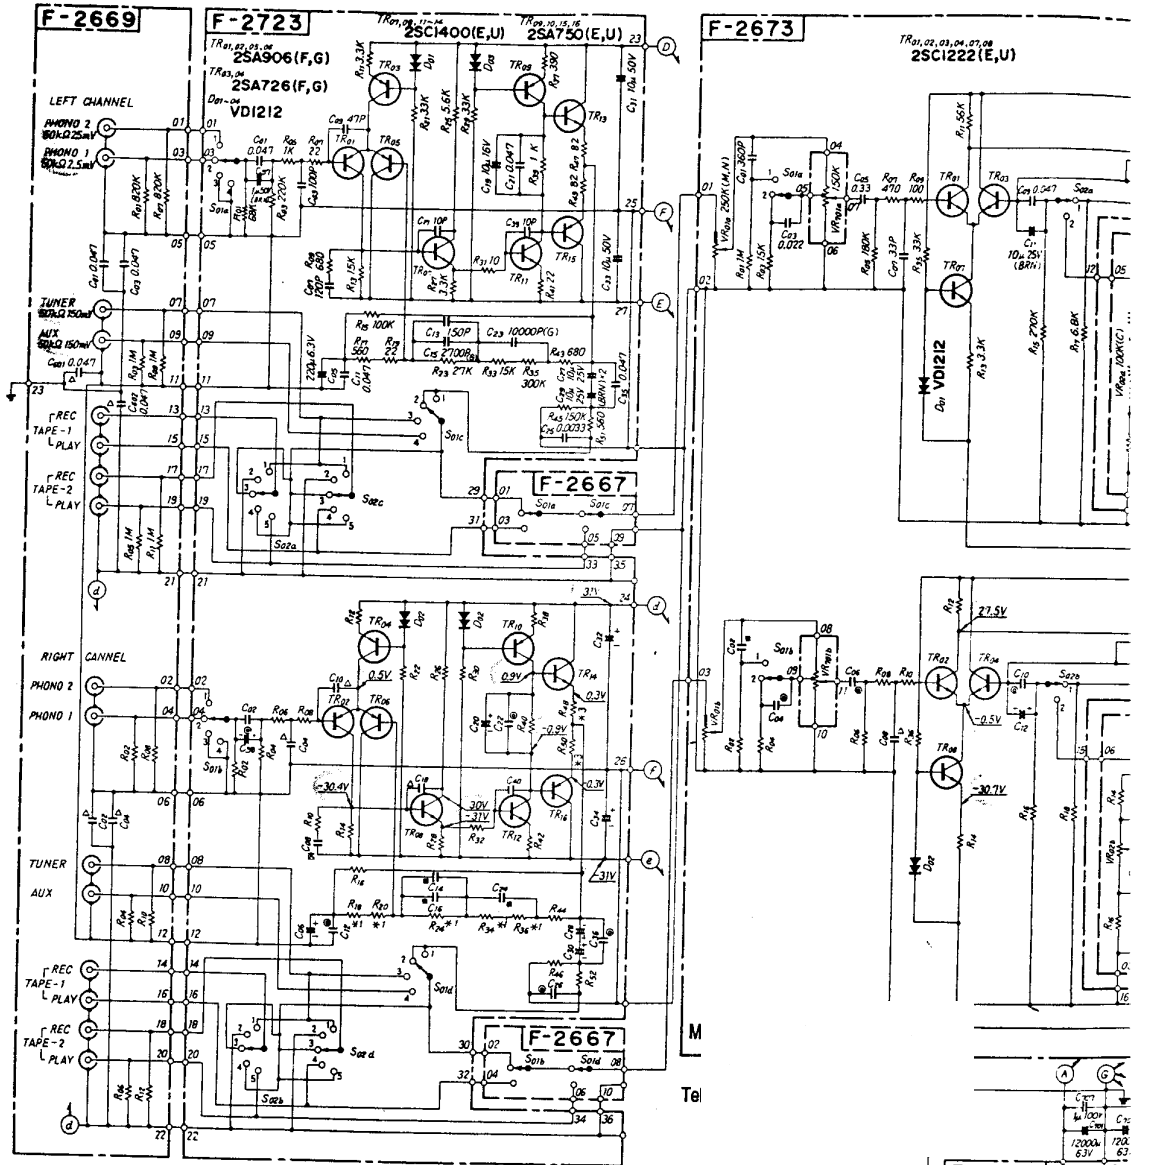

- | | | | |
|-----------------|--------|-------|---|
| Selector | F-2723 | Slide | 1. phono-2
2. phono-1
3. tuner
4. aux |
| Tape Copy | F-2723 | Slide | 1. tuner
2. off
3. source
4. S > 1 > 2
5. S > 2 > 1 |
| Tape Play | F-2667 | Slide | 1. source
2. tape-1
3. source
4. tape-2
1. off
2. on |
| Loudness | F-2673 | Slide | 1. off
2. on |
| Tone | F-2673 | Slide | 1. off
2. on |
| Sabsonic Filter | F-2673 | Slide | 1. off
2. 18Hz |
| PRE-POWER | F-2670 | Slide | 1. CONNECTED
2. DIRECT COUPLED
3. CAPACITOR COUPLED] SEPARATED |
| Speakers | F-2670 | Slide | 1. off
2. A
3. B
4. A+B |
| Power | F-2670 | Slide | 1. off
2. on |

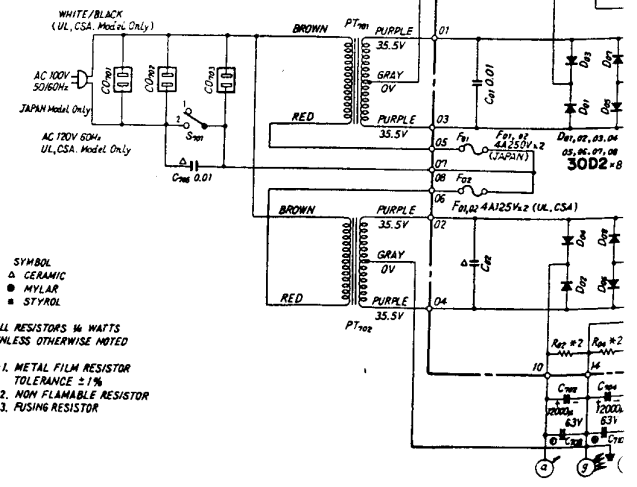


SYMBOL
 ▲ CERAMIC
 ● MYLAR
 ■ STYROL

ALL RESISTORS 1/4 WATTS UNLESS OTHERWISE NOTED

*1. METAL FILM RESISTOR TOLERANCE ±1%
 *2. NON FLAMMABLE RESISTOR
 *3. FUSING RESISTOR

AU-517/717 AU-517/717

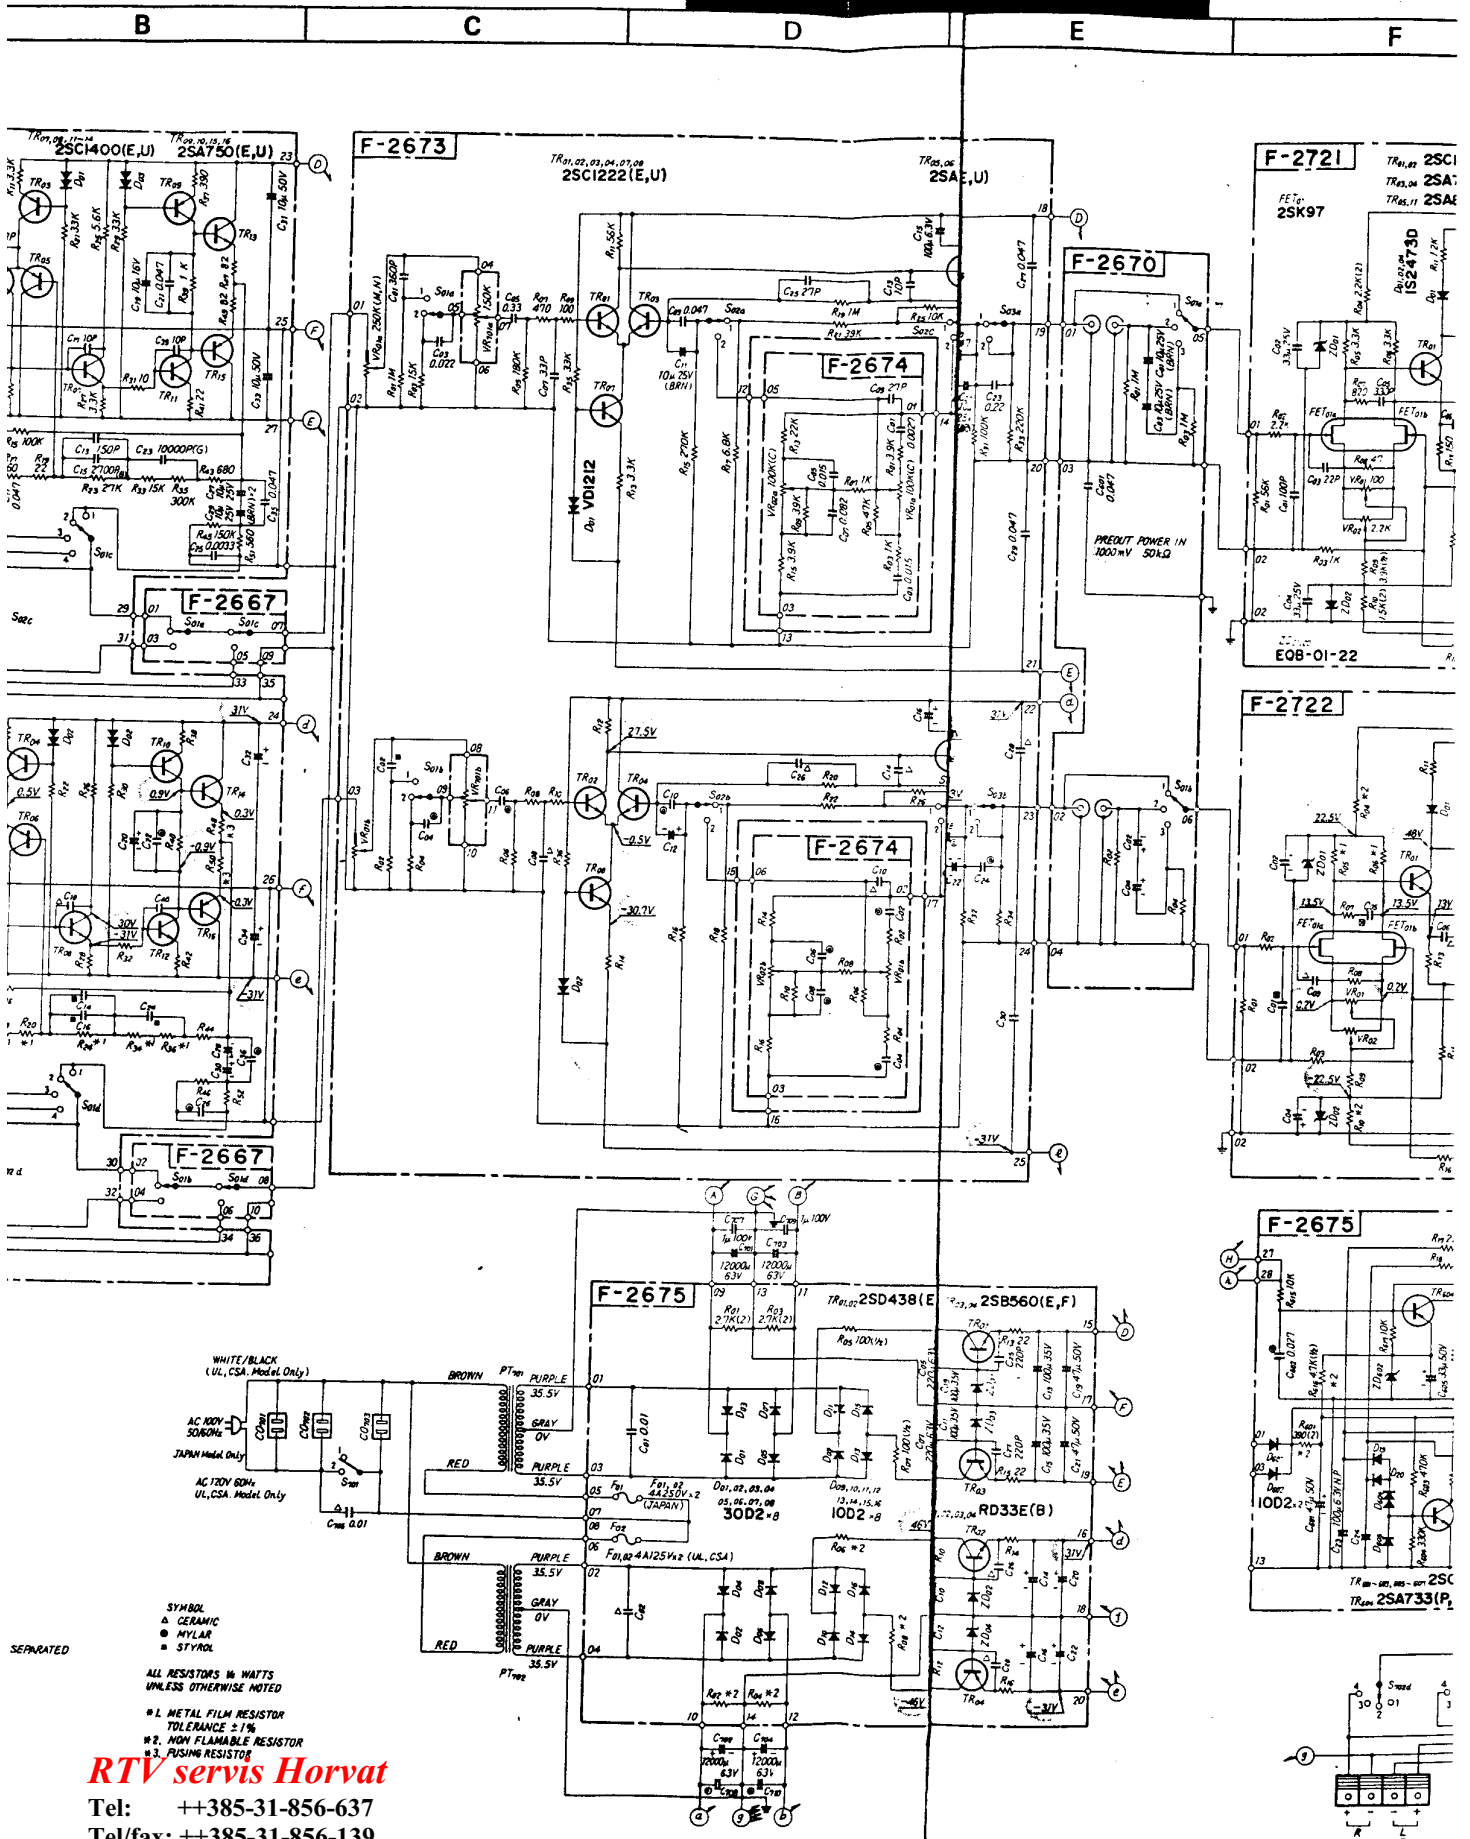

WHITE/BLACK
(UL, CSA, Model Only)

BROWN PT₁₀₀ PURPLE
35.5V

RED PURPLE
35.5V

BROWN PURPLE
35.5V

RED PURPLE
35.5V

GRAY 0V

PT₁₀₀ 35.5V

SYMBOL
 ▲ CERAMIC
 ● MYLAR
 ◆ STYROL

ALL RESISTORS IN WATTS
UNLESS OTHERWISE NOTED

#1 METAL FILM RESISTOR
TOLERANCE ±1%

#2 NON FLAMMABLE RESISTOR

#3 FUSING RESISTOR


RTV servis Horvat


Tel: ++385-31-856-637

Tel/fax: ++385-31-856-139

Mob: 098-788-319


www.rtv-horvat-dj.hr



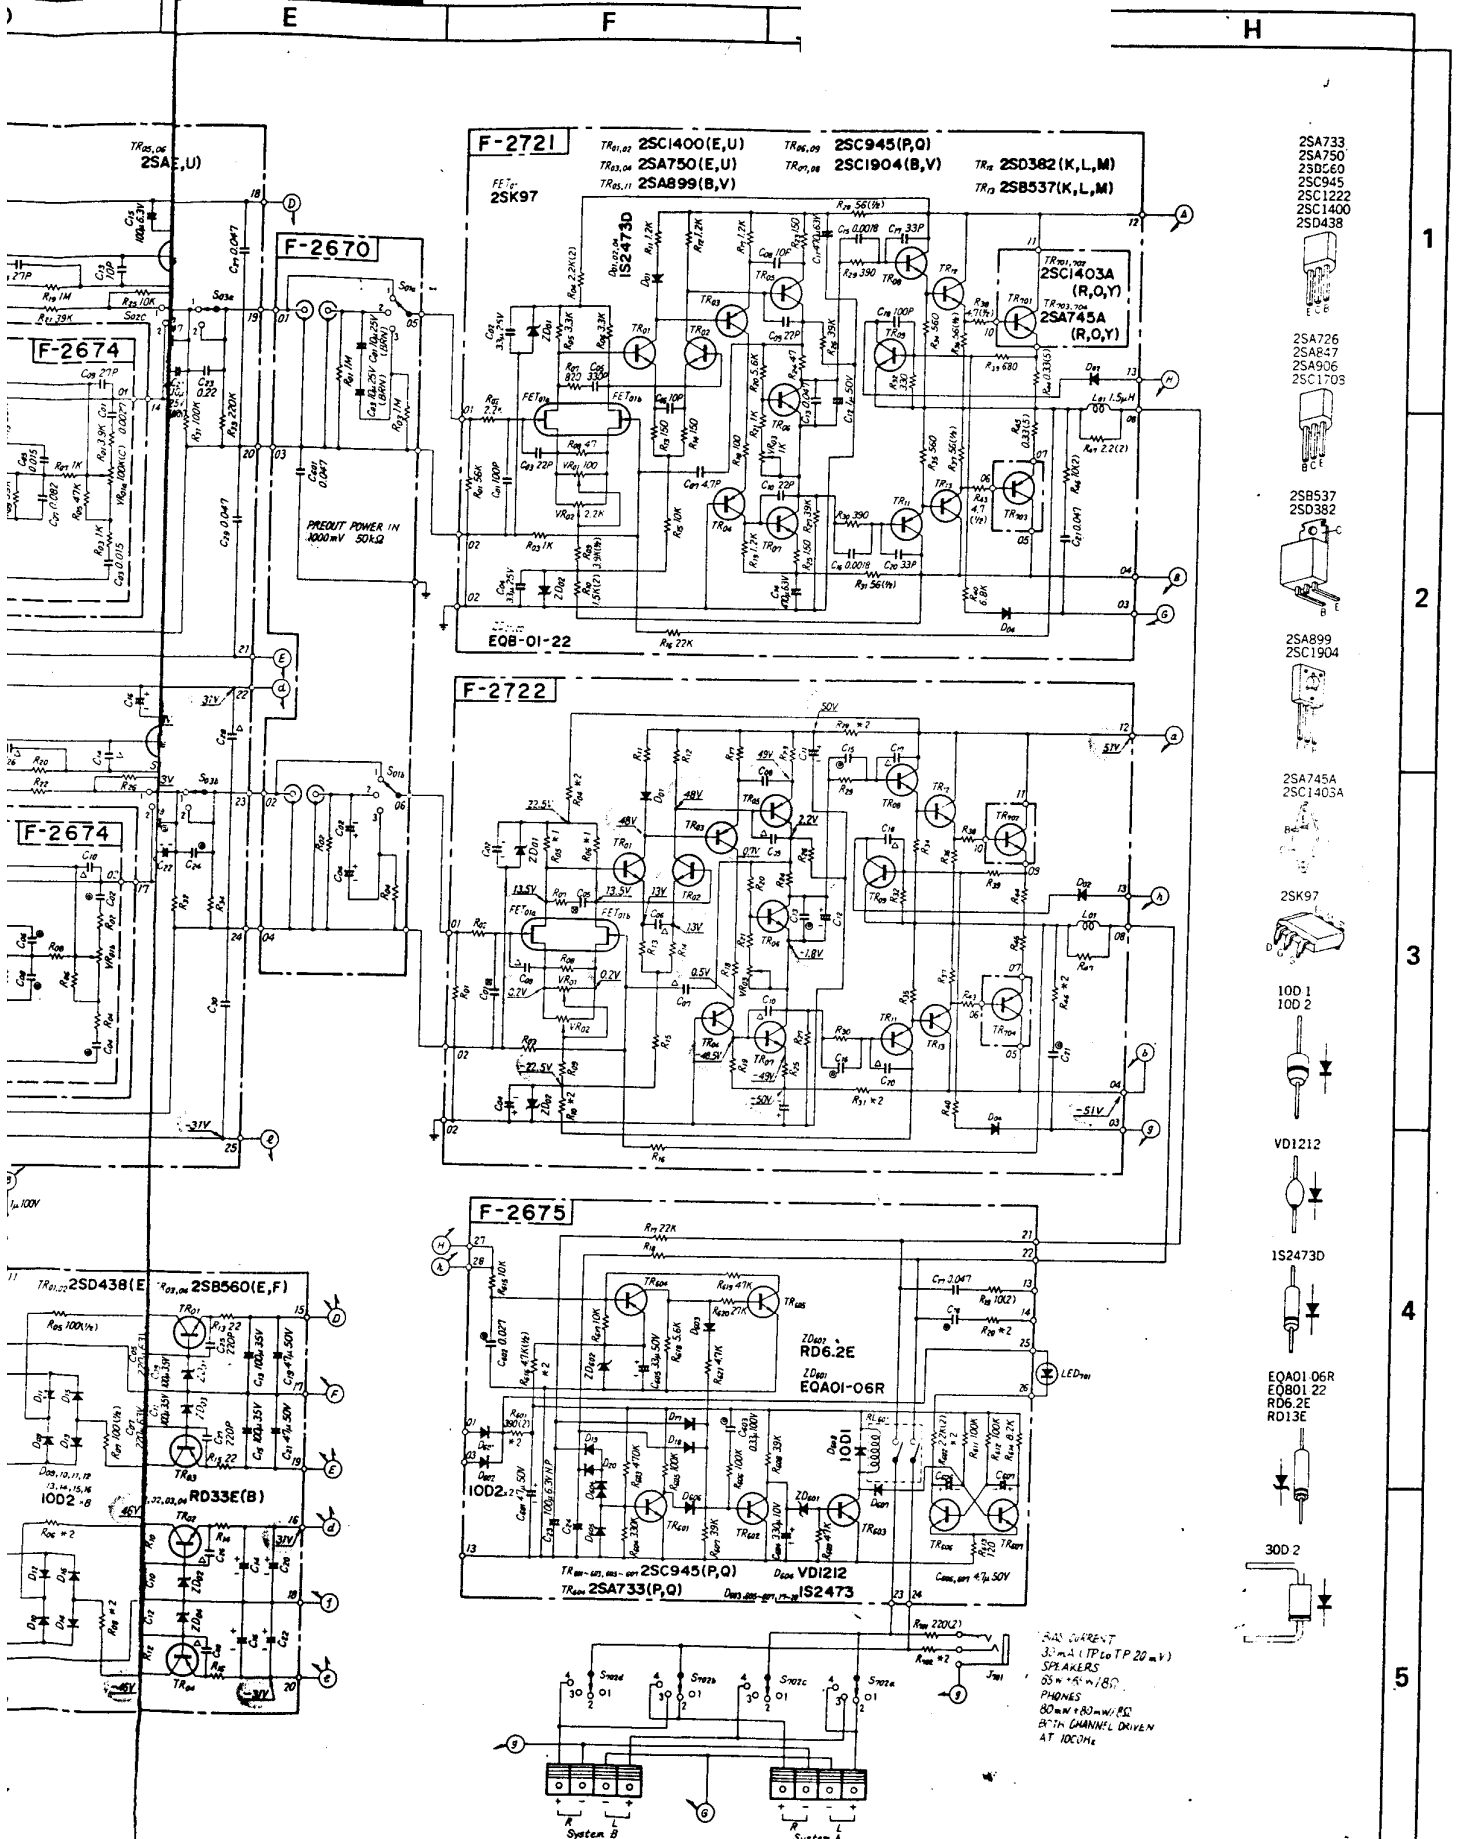

A B C D


7-4. AU-717

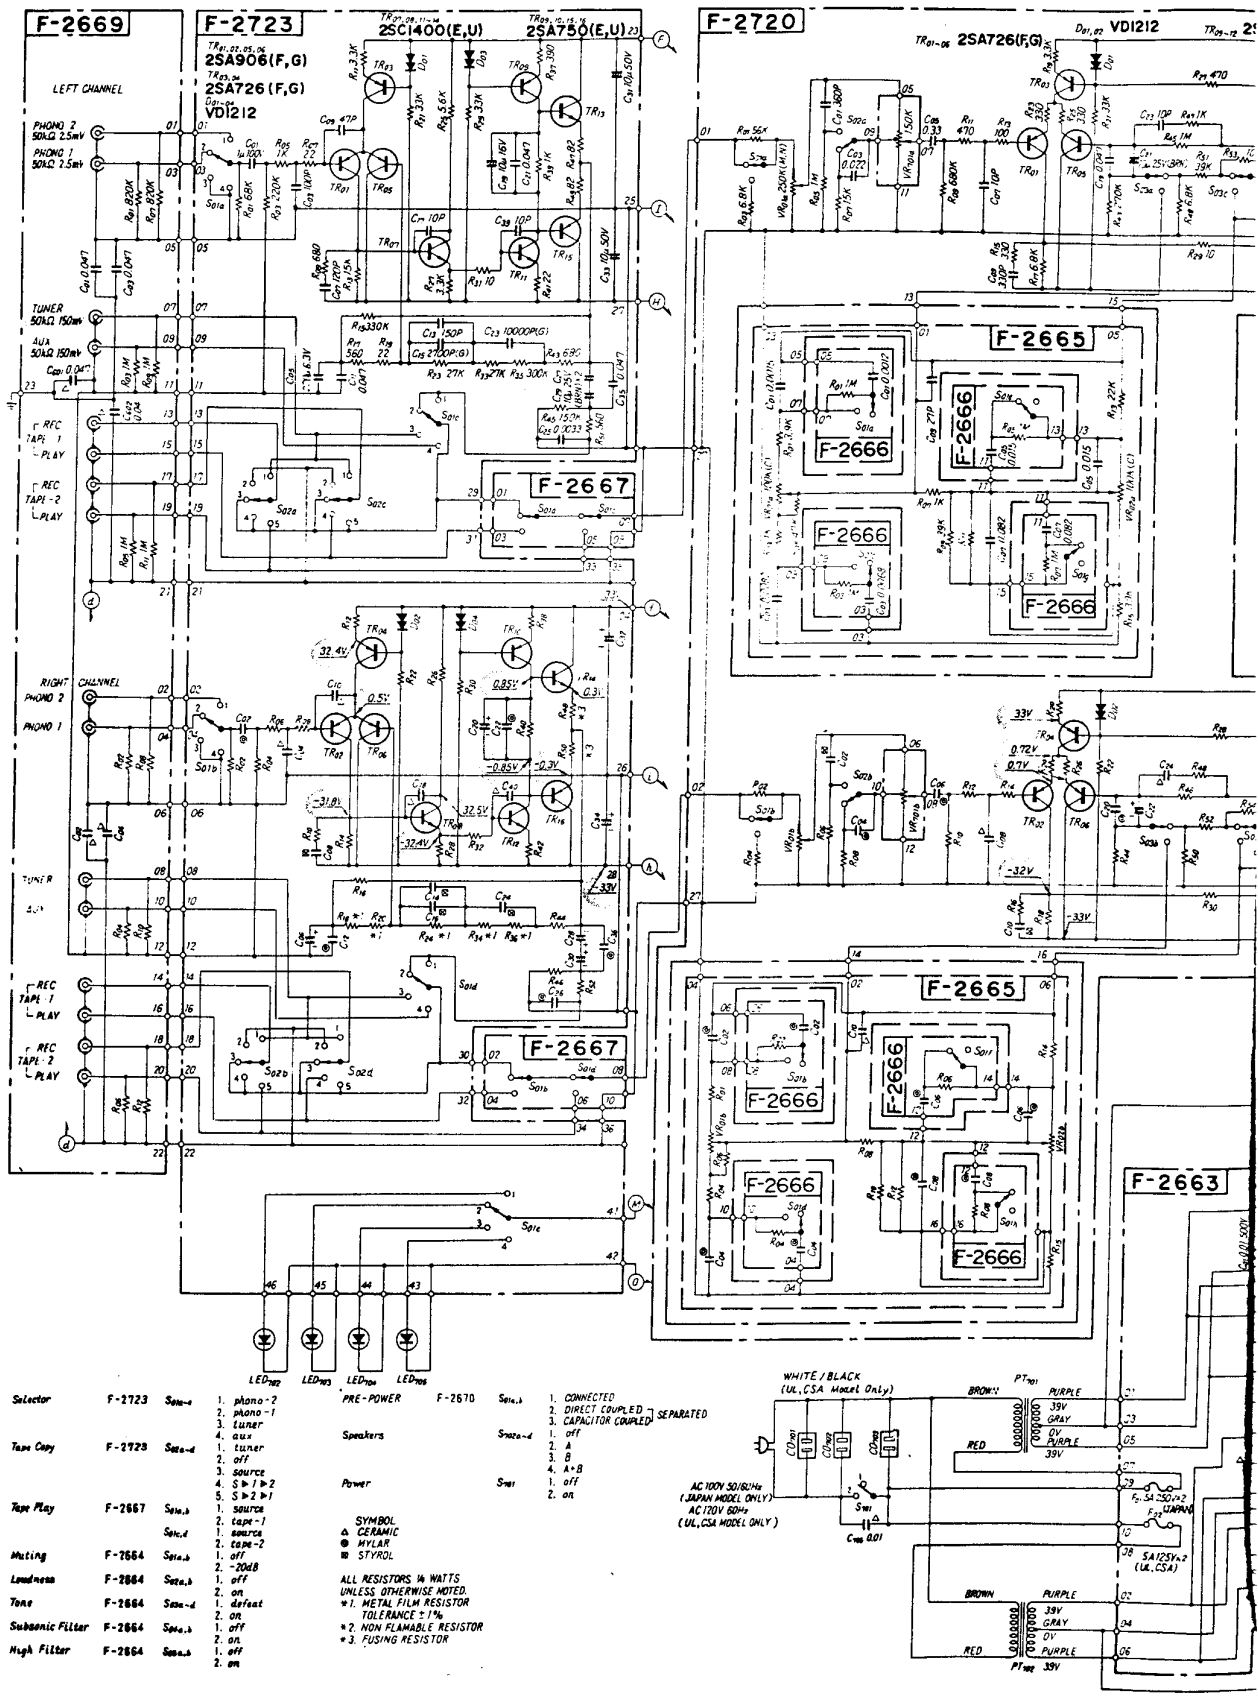


- | | | | | | | | |
|-----------------|--------|-------|---|-----------|--------|---------|---|
| Selector | F-2723 | Set-a | 1. phono-2
2. phono-1
3. tuner
4. aux | PRE-POWER | F-2670 | Set-a | 1. CONNECTED
2. DIRECT COUPLED
3. CAPACITOR COUPLED |
| Tape Copy | F-2723 | Set-d | 1. tuner
2. off
3. source
4. S1=1-2
5. S1=2-1 | Speakers | F-2667 | Set-a-d | 1. off
2. A
3. B
4. A+B |
| Tape Play | F-2667 | Set-a | 1. source
2. tape-1
3. source
4. tape-2 | Power | F-2665 | Set | 1. off
2. on |
| Muting | F-2664 | Set-a | 1. off
2. -20dB | | | | |
| Loudness | F-2664 | Set-a | 1. off
2. on | | | | |
| Tone | F-2664 | Set-d | 1. defeat
2. on
3. off | | | | |
| Subsonic Filter | F-2664 | Set-a | 1. off
2. on | | | | |
| High Filter | F-2664 | Set-a | 1. off
2. on | | | | |

SYMBOL
 ▲ CERAMIC
 ● MYLAR
 ■ STYROL

ALL RESISTORS IN WATTS
 UNLESS OTHERWISE NOTED.
 *1. METAL FILM RESISTOR
 TOLERANCE ± 1%
 *2. NON-FLAMMABLE RESISTOR
 *3. PUSHING RESISTOR

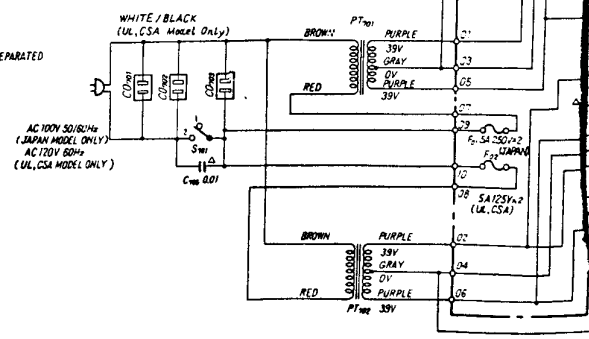

AU-517/717 AU-517/717

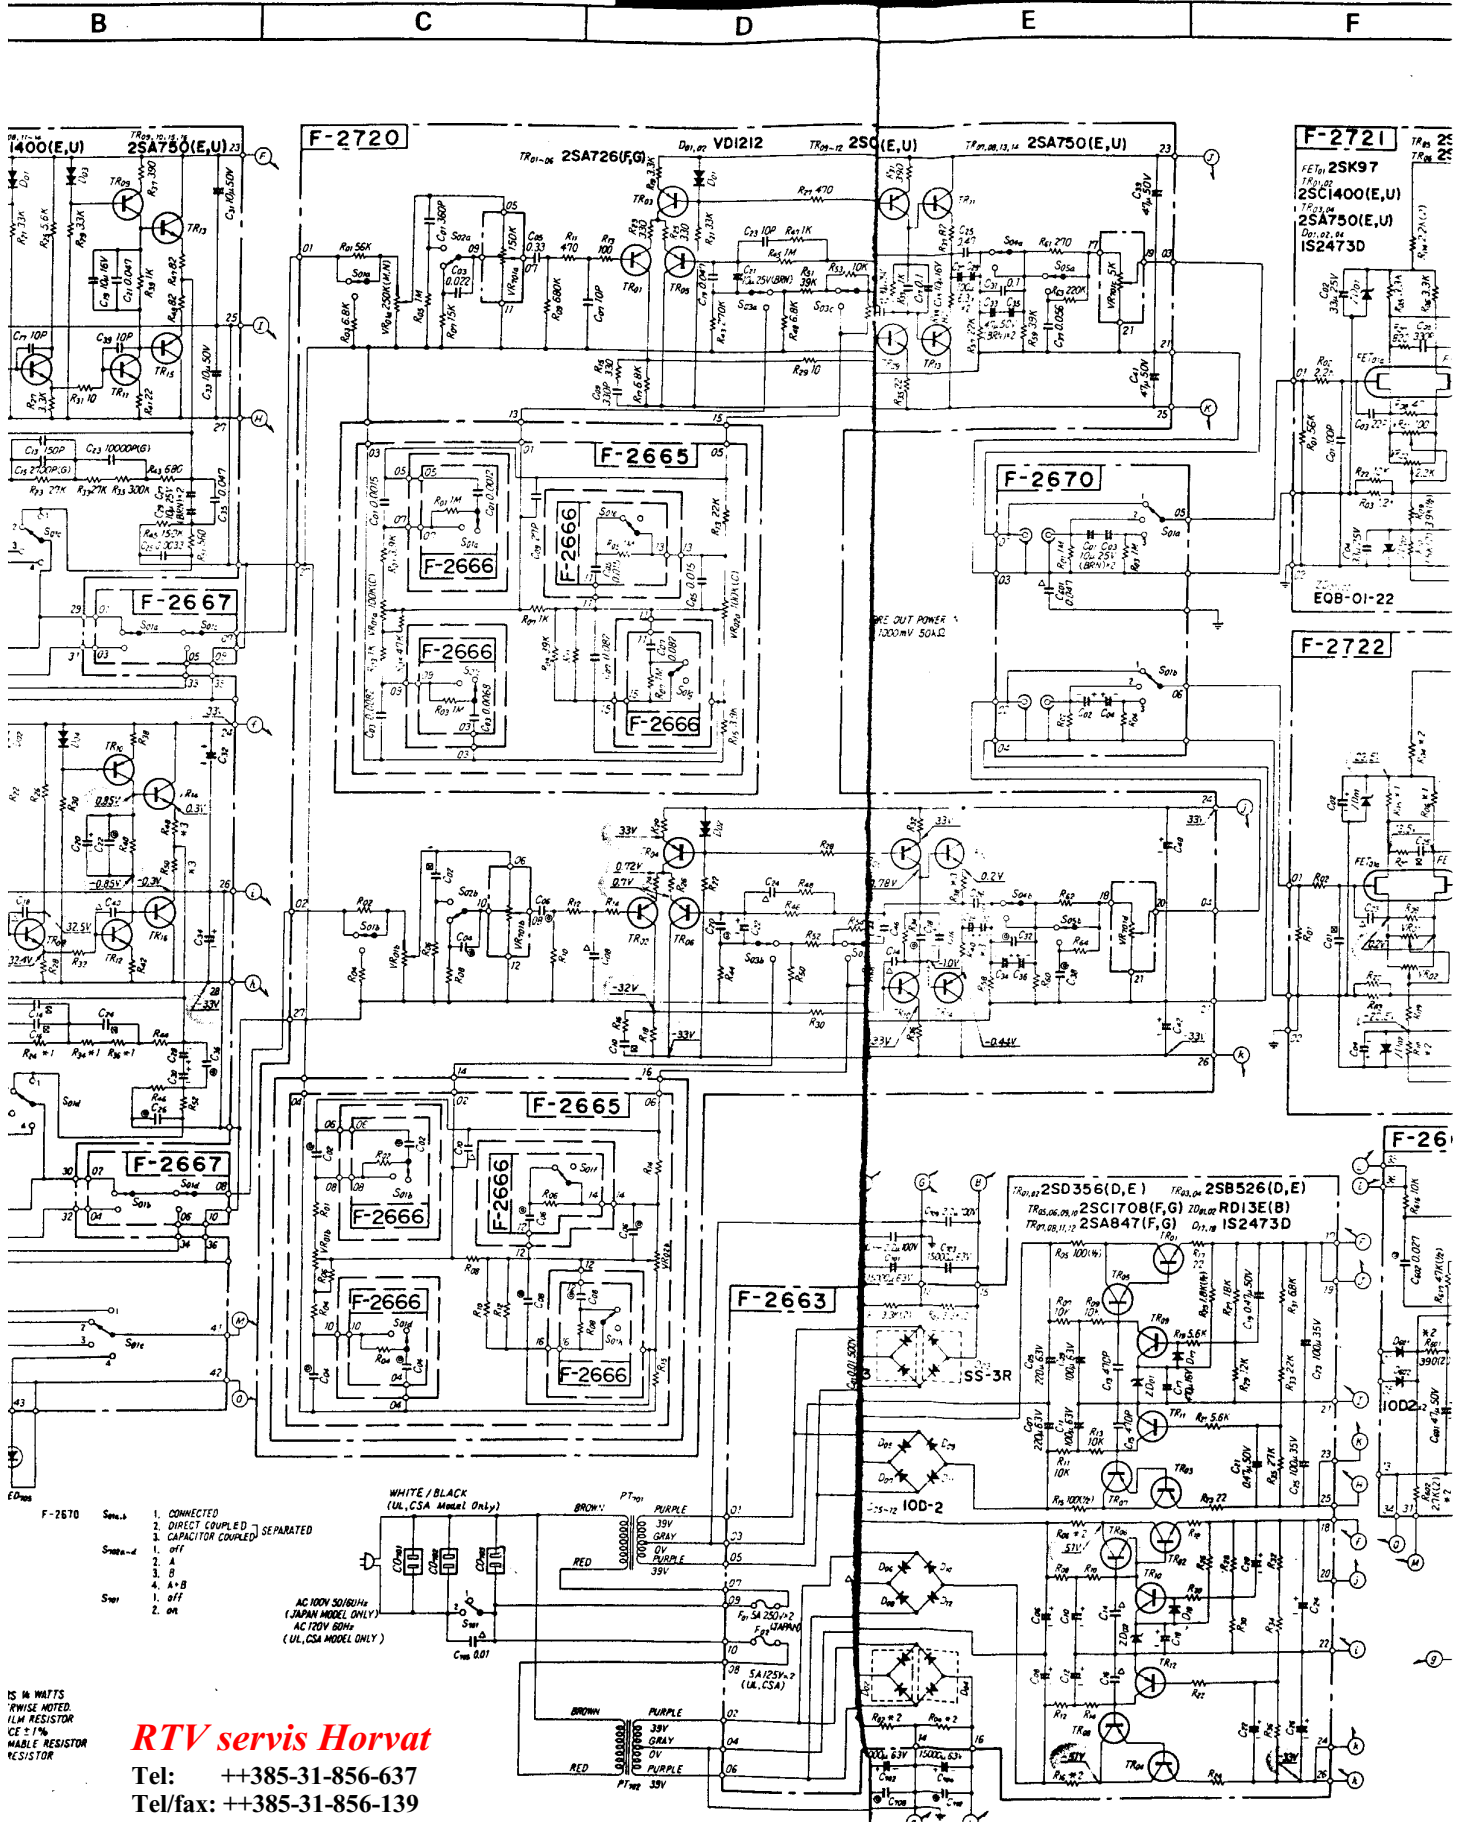

IS IN WATTS
 *UNLESS NOTED,
 1/4W RESISTOR
 CE ± 5%
 *UNLESS NOTED,
 1/4W RESISTOR

RTV servis Horvat


Tel: ++385-31-856-637

Tel/fax: ++385-31-856-139

Mob: 098-788-319

www.rtv-horvat-dj.hr

www.rtv-horvat-dj.hr

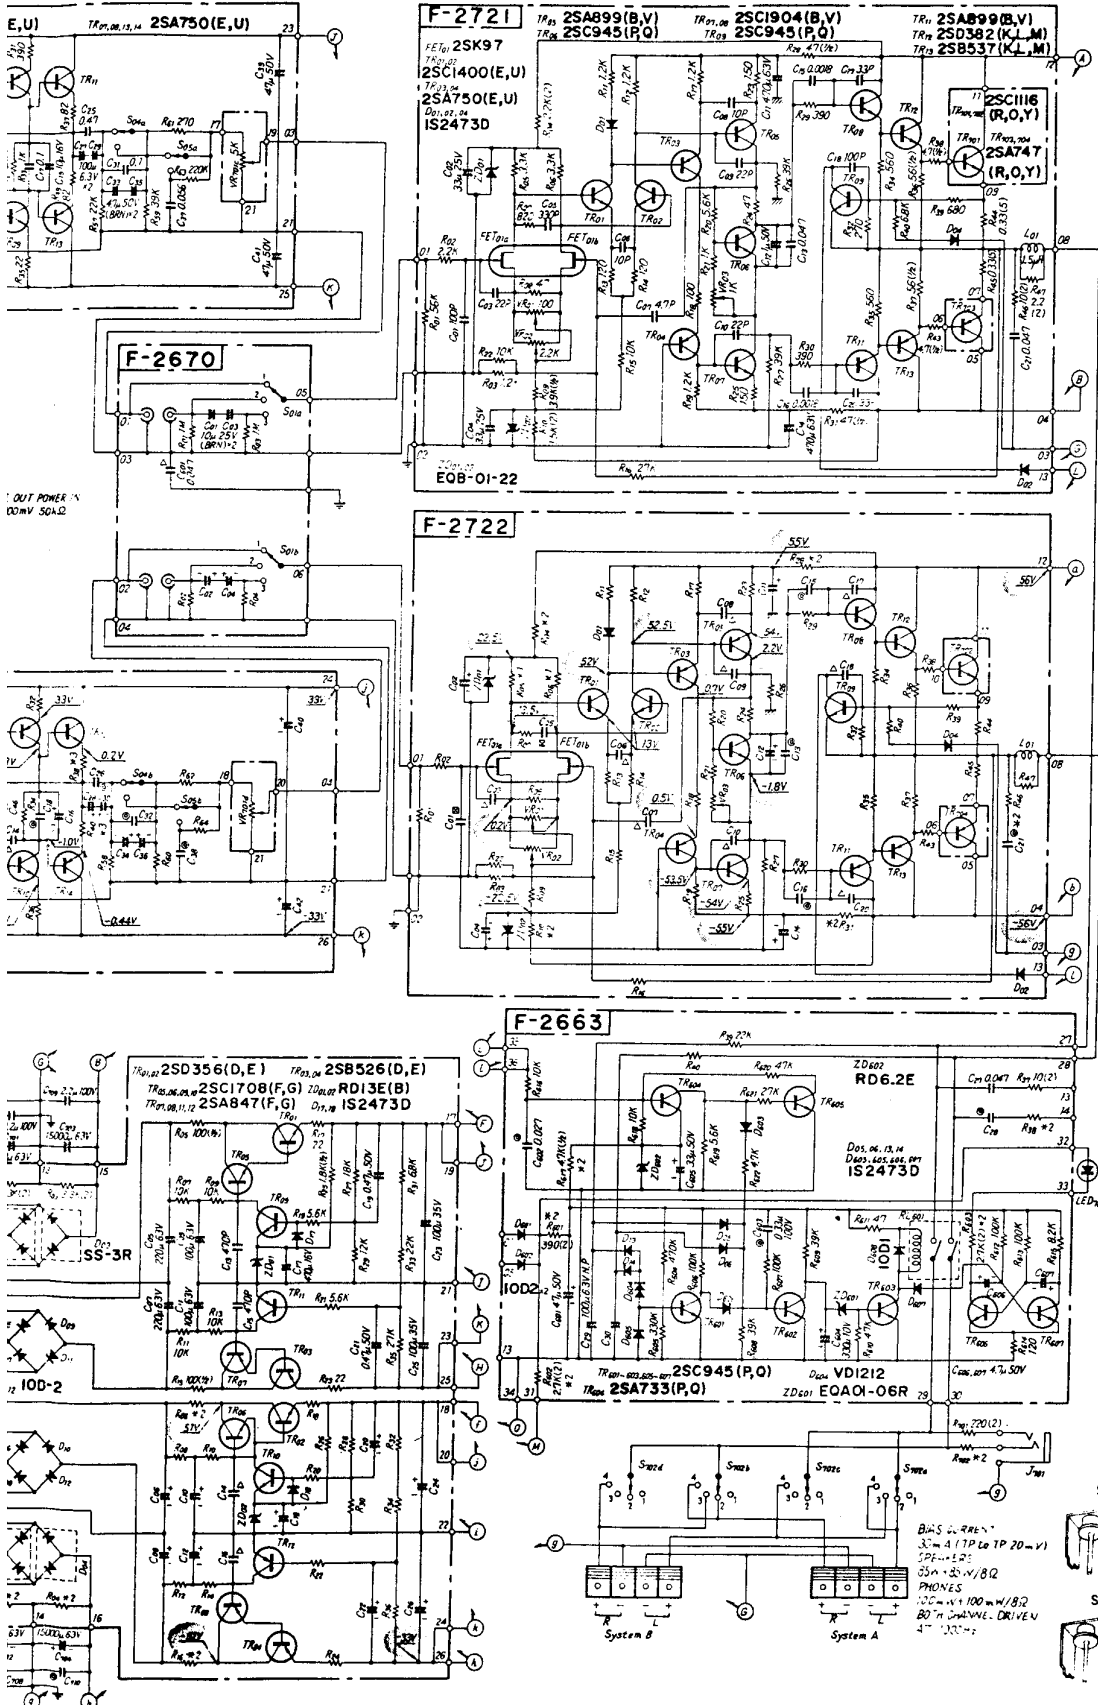

- 2SA733
- 2SA750
- 2SC945
- 2SC1222
- 2SC1400

- 2SA726
- 2SA827
- 2SA975
- 2SC1705

- 2SC1116
- 2SA747

- 2SA747
- 2SC1116

- 2SA747
- 2SC1116

- 2SA747
- 2SC1116

- 2SK97

- 100 1
- 100 2

- VD1212
- IS2473D

- EQA01 06R
- EQB01 22
- RD6 2E
- RD13E

- SS 3
- SS 3R

1

2


3

4

5

8. OPERATION OF PROTECTOR CIRCUIT

This protector circuit contains two functions at abnormal condition; a speaker protector circuit against DC voltage appearing at output, and speaker protector circuit against over-current.

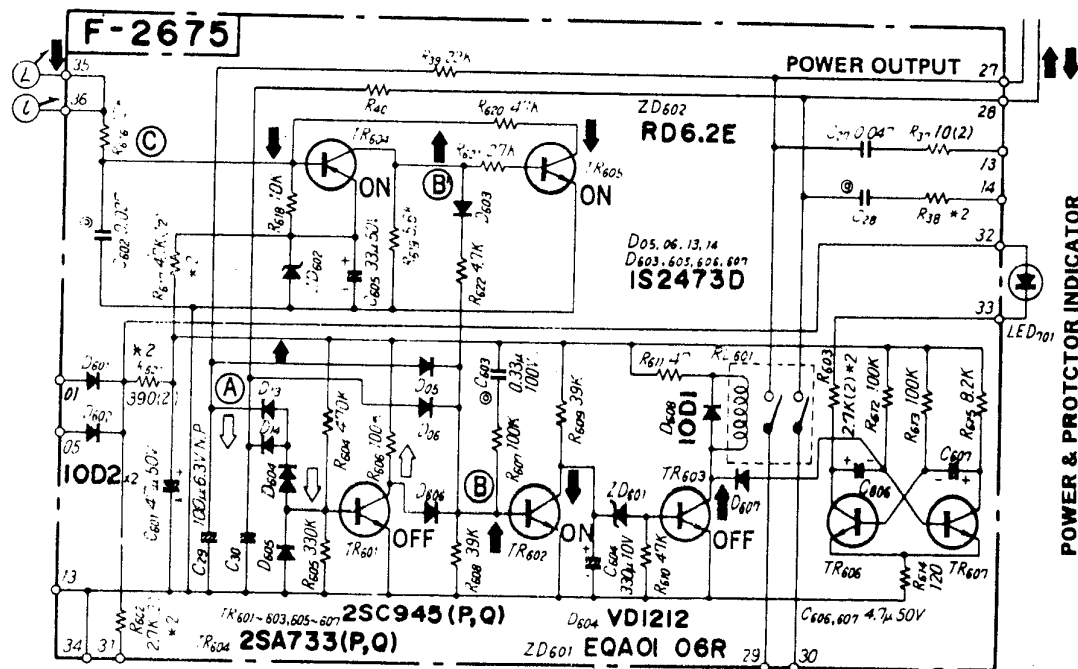

A. Speaker Protection Circuit against DC voltage appearing at output (A)

1. When an abnormal negative voltage appears at output (A), TR601 turns off, TR602 turns on and TR603 turns off so that the relay, RL601, keeps off in order to protect loudspeakers from break-down.
2. While the relay, RL601, keeps OFF, zero voltage (center voltage) controlling TR607 through D607 will increase, resultly the LED701 as protector indicator, starts flickering.
3. When abnormal positive voltage appears at output (A), the voltage is supplied to TR602 directly, and the operation of the protector circuit is same as above mentioned 1.

B. Speaker Protection Circuit against abnormal over-current


1. At the moment when abnormal excessive current flows into power transistors, a transistor (TR604) detecting excessive over-current, on power stage becomes ON.
2. Then, DC voltage at (C) decreases, resultly TR604 turns on, and positive certain voltage appears at (B).
3. As mentioned above, when TR602 turns on, the relay, RL601, keeps OFF; a certain positive voltage at (B) turns on TR605 too, resultly collector voltage of TR605 decreases and its collector voltage keeps a certain voltage at (C) simultaneously.
4. By keeping a certain DC voltage at (C), the LED701 as protector indicator continues flickering, even though all circuits work completely.

C. Operation of astable multivibrator

1. When control (bias) voltage is not supplied to the base of TR607 in abnormal condition, TR606 and TR607, on astable multivibrator repeat turning (switching) on and off alternately each other by charging and discharging of capacitors, C606 & C607, resultly, the LED701 as protector indicator continues flickering.
2. When the relay, RL601 is turned on, base voltage of TR607 becomes zero volt through D607 and TR606 becomes ON, resultly LED701 as power Indicator lights up.

9. PACKING LIST

Parts No.	Stock No.	Description
1	9116675	Vinyl Cover
2	9028020	Styrofoam Packing (L)
	9028030	Styrofoam Packing (R)
3	9009705	Carton Case (AU-717)
	9009708	Carton Case (AU-517)

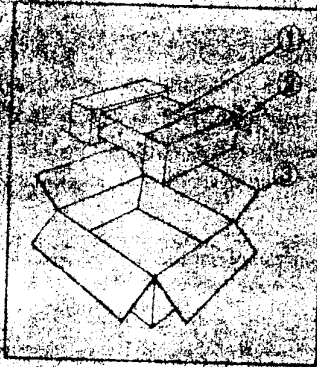

10. ACCESSORY PARTS LIST

Stock No.	Description
9205585	Operating Instructions (AU-517)
9205580	Operating Instructions (AU-717)
9116208	Hexagon Wrench (1.5mm)
9116580	Vinyl Bag For Wrench
9237540	Schematic Diagram (AU-517)
9237540	Schematic Diagram (AU-717)
9396340	Rock Mounting Adaptor (each)
9276140	Rear Stand (each)

THE QUALITY OF
THIS PAGE IS
THE BEST THAT
IS AVAILABLE

MEMO

RTV servis Horvat

Tel: ++385-31-856-637

Fel/fax: ++385-31-856-139

Mob: ++385-98-319-110

www.rtv-horvat-dj.hr



SANSUI ELECTRONICS CORPORATION: 55-11 Queens Blvd, Woodside, N.Y. 11377 U.S.A.
333 West Alondra Blvd, Gardena, California 90247 U.S.A.
3036 Keolu St, Honolulu, Hawaii 96819 U.S.A.

SANSUI AUDIO EUROPE N.V.: North Trade Bldg, 29th Floor, Noorderlaan 133-Bus 1, 2030 Antwerp, Belgium

SANSUI AUDIO EUROPE S.A.: Arabella center, 6 Frankfurt AM Main, Lyoner Strasse 44-48, West Germany

SANSUI ELECTRIC COMPANY LTD.: 74-1, Izumi 2-chome, Suginamiku, Tokyo 168 Japan PHONE: (03) 323-1111/TELEX:232-2076

SM02

Printed in Japan (671330M)