

AF Ass'y AWK-050 (5-Voltage models)  
AWK-049 (220V only models)

### SWITCHES

- S<sub>1</sub>: FUNCTION SWITCH
  - 1. PHONO
  - 2. TUNER
  - 3. AUX
- S<sub>2</sub>: TAPE MONITOR 1
  - SOURCE → TAPE P.B.
- S<sub>3</sub>: TAPE MONITOR 2
  - SOURCE → TAPE P.B.
- S<sub>4</sub>: TONE SWITCH
  - OFF → ON
- S<sub>5</sub>: LOUDNESS
  - OFF → ON
- S<sub>6</sub>: SPEAKER SELECTOR
  - 1. SP OFF
  - 2. SP A
  - 3. SP B
  - 4. SP A + B
- S<sub>7</sub>: POWER SWITCH
  - OFF → ON
- S<sub>8</sub>: RELAY
  - ON → OFF

### RESISTORS


IN OHM, 1/4W, ±5% TOLERANCE UNLESS OTHERWISE NOTED K:KΩ M:MΩ

### CAPACITORS


IN μF UNLESS OTHERWISE NOTED P: pF

### NOTES

- : SIGNAL VOLTAGE NECESSARY FOR OBTAINING 37W/8Ω OUTPUT POWER (1K Hz).
- V : DC VOLTAGE AT NO INPUT SIGNAL.
- V : DC VOLTAGE AT 37 WATTS x2 OUTPUTS.
- ↑ A : DC CURRENT AT NO INPUT SIGNAL.

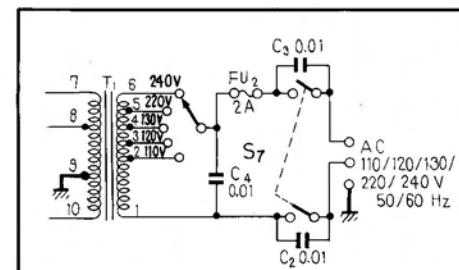

MANUFACTURED FOR ENGLAND  
OR AUSTRALIA

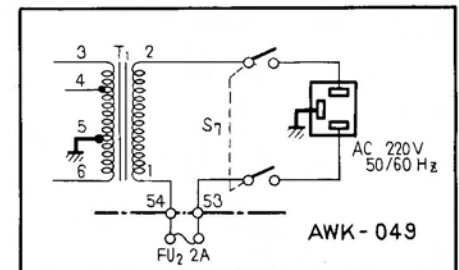

POWER SUPPLY (220V only model)

