




KENWOOD
HI/FI STEREO COMPONENTS

SERVICE MANUAL

KR-5200

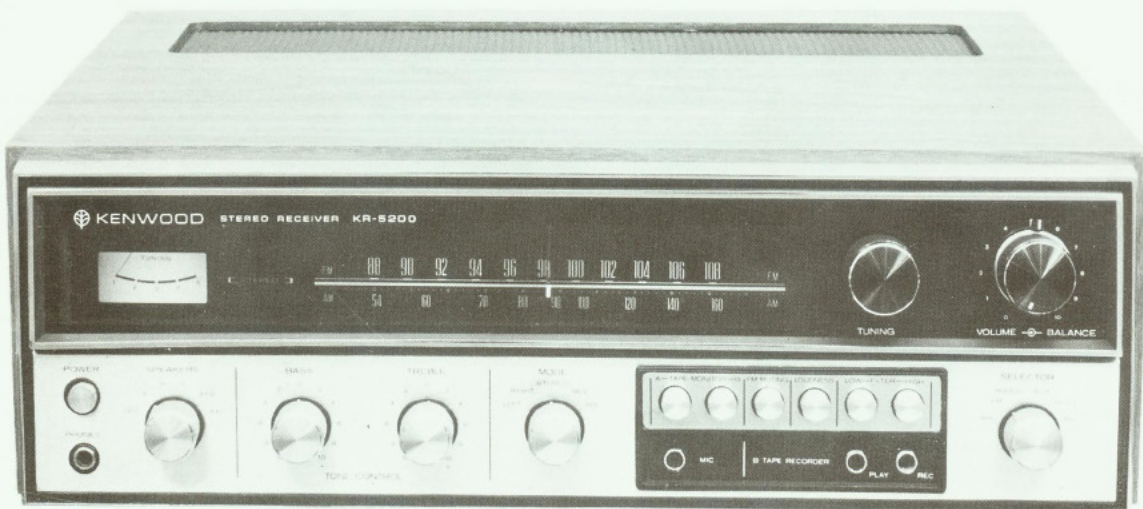

STEREO RECEIVER

SPECIFICATIONS

FM TUNER SECTION

Antenna Impedance	300/75Ω
Usable Sensitivity (IHF)	1.8μV
Harmonic Distortion (at 400Hz 100% Mod.)	
MONO	0.5%
STEREO	0.7%
Signal to Noise Ratio	65 dB
Capture Ratio	2.0 dB
Selectivity (Alt. CH.) (IHF)	60 dB
Image Rejection	70 dB
IF Rejection	100 dB
Spurious Signal Rejection	100 dB
AM Suppression	70 dB
Stereo Separation (at 1kHz)	40 dB
(at 10kHz)	25 dB
Sub Carrier Suppression	60 dB
Muting Level	10μV
Quieting Slope	52 dB 5μV 58 dB 10μV 65 dB 50μV
Frequency Response	20 ~ 15 kHz +0.5 dB, -2 dB
Front End	2 FET (1 DG), 4 Gang
IF Stage	1 IC, 3 element mechanical filter

AM TUNER SECTION

Antenna	Built in ferrite bar antenna and external antenna terminal.
Usable Sensitivity (IHF)	15μV
Signal to Noise Ratio	45 dB
Selectivity (IHF)	35 dB
Image Rejection	70 dB
IF Rejection	70 dB
Front End	3 Gang
IF Stage	2 stages

AMPLIFIER SECTION

Dynamic Power Output (IHF)	
Both CH. 4Ω 1kHz	140 watts
Both CH. 8Ω 1 kHz	115 watts
Continuous Power Output	
Each CH. 4Ω 1kHz	52/52 watts
Each CH. 8Ω 1kHz	44/44 watts
Both CH. 4Ω 1kHz	40/40 watts
Both CH. 8Ω 1kHz	33/33 watts
Both CH. 8Ω 20 ~ 20 kHz	30/30 watts
Harmonic Distortion (at rated)	0.5%
(at -3 dB rated)	0.1%
I.M. Distortion (at rated)	0.5%
(at -3 dB rated)	0.1%
Frequency Response	20 ~ 40 kHz ±2 dB
(High Level Input)	
Power Band Width (IHF)	17 ~ 30,000 Hz

Input Sensitivity

PHONO	2.5 mV	50 kΩ
MIC	3 mV	25 kΩ
AUX 1	150 mV	30 kΩ
AUX 2	150 mV	30 kΩ
TAPE PLAY A	150 mV	30 kΩ
TAPE PLAY B	150 mV	30 kΩ
Recording Output		
TAPE REC A	150 mV	
TAPE REC B	150 mV	
DIN	30 mV	
Damping Factor (at 8Ω)	50	
Hum and Noise		
PHONO	65 dB	
MIC	55 dB	
AUX 1	75 dB	
AUX 2	75 dB	
TAPE PLAY A	75 dB	
TAPE PLAY B	75 dB	
Speaker Impedance	4 ~ 16Ω	
Tone Control		
BASS (at 100Hz)	±10 dB	
TREBLE (at 10kHz)	±10 dB	

Filter

LOW (at 100Hz)	-7 dB
HIGH (at 10kHz)	-10 dB
Loudness Control (-3 dB)	
at 100Hz	+10 dB
at 10kHz	+5 dB

GENERAL

Switches:	SPEAKERS SELECTOR	OFF-A-B-C-A+B-A+C AM-FM-PHONO-AUX 1- AUX 2-MIC
	MODE	LEFT-RIGHT-STEREO- REV-MIX
	OTHERS	TAPE MONITOR A, TAPE MONITOR B, LOW-HIGH FILTER, FM MUTING, LOUDNESS, MIC jack
AC Outlets	SWITCHED UNSWITCHED	1 1
Semiconductors		2 FETs, 1 IC, 51 Transistors, 48 Diodes
Power Consumption		
at full power		260 watts
at no signal		40 watts
Dimensions		17-1/18"(W) x 5-3/4"(H) x 14"(D)
Weight		24.6 lbs.
Walnut Cabinet (included price)		YES

TROUBLE SHOOTING

Symptom	CHECK Unit (Page)					
	R.f. (4)	I.f. (4 ~ 5)	MPX (5)	Pre (6)	Tone (6)	Main (6 ~ 7)
No sound				•	•	•
Distortion		•				•
Noise		•		•	•	•
Dynamic range				•		
Hum				•	•	
Crosstalk				•		
Bias voltage variation						•
Oscillation						•
Heated transistor						•
Tone					•	
Poor output at low frequency in PHONO position				•		
Protection						•
Out of dial calibrations	•					
Not light stereo indicator		•	•			
Drift	•					
Separation			•			
Interference	•	•				
Carrier-leak			•			
Sensitivity	•	•				
Muting		•				
Meter		•				
Not receive f.m. broadcastings	•	•				
Not receive a.m. broadcastings		•				

Note: This troubleshooting has not power supply, sub unit and etc..

■ R.f. Unit (X01-1030-10)

Complaint	Possible cause	Repairs
Not receive f.m. broadcastings	Poor connection of supply voltage line.	Check the terminal No. 3.
	Faulty transistor Qa ₃ .	Check and replace.
	Poor adjustment of trimmer CTa ₅ .	Readjustment.
Poor sensitivity	Poor adjustment.	Readjustment.
	Faulty FETs Qa ₁ , 2.	Check and replace.
	Poor connection of supply voltage line.	Check coils La ₅ , 6.
Out of calibrations	Poor adjustment of local oscillation.	Readjustment.
Drift	Faulty trimmer CTa ₄ of local oscillator.	Check and replace.
Interference	Poor adjustment.	Readjustment

■ I.f. Unit (X02-1020-10)

Not light stereo indicator	Poor adjustment of coil Lb ₆ and potentiometer VRb ₃ .	Readjustment
	Faulty transistors Qb ₇ , 8 and diode Db ₁₁ .	Check and replace.
	Faulty or poor adjustment of MPX unit.	Check and replace, or readjust
Not operate f.m. muting	Faulty transistors Qb ₉ , 10 and diode Db ₁₂ .	Check and replace.
Not receive broadcastings with muting off (but signal meter's pointer swings)	Faulty transistor Qb ₁₀ .	Check collector of Qb ₁₀ to be 0V under operating.
	Faulty IC ICb ₁ .	Check and replace.
Distortion	Faulty diodes Db ₄ , 5 and coil Lb ₃ .	Check and replace.
	Poor adjustment of coil Lb ₃ .	Readjustment
Poor f.m. sensitivity. (but signal meter's pointer swings)	Faulty transistors Qb ₄ , 5, and IC ICb ₁ .	Check and replace.
(Not meter's pointer swings)	Faulty transistors Qb ₁ ~ 3.	Check and replace.

■ I.f. Unit (X02-1020-10)

Complaint	Possible cause	Repairs
Not receive f.m. broad-castings. (but singal meter's pointer swings)	Faulty transistor Qb _{4,5} , and IC Icb ₁ .	Check and replace.
(But meter's pointer not swing)	Poor connection of supply voltage line.	Check the terminal No. 6.
Not receive (a.m.)	Faulty transistors Qb _{11 ~ 15} .	Check and replace.
Noise (a.m.)	Faulty variable capacitor.	Check it.
Interference (a.m.)	Faulty trans. and coils Lb _{11 ~ 15} .	Check and replace.
Distortion (a.m.)	Faulty diodes Db _{13, 14} .	Check and replace.
Poor sensitivity (a.m.)	Faulty transistors Qb _{11 ~ 14} .	Check and replace.

■ MPX Unit (X04-1010-10)

Not light stereo indicator	Faulty pilot lamp.	Check and replace.
	Poor i.f. stage.	Readjustment
	Poor adjustment of potentiometer VRc ₂ .	Readjustment
	Faulty transistors Qc _{2, 4 ~ 7} .	Check and replace.
Not separate (but stereo indicator lights)	Faulty of transistor Qc ₃ and coil Lc ₄ .	Check and replace.
Poor separation	Poor adjustment of coils Lc _{2 ~ 4} and potentiometer VRc ₁ .	Readjustment
	Faulty diodes Dc _{3 ~ 10} .	Check and replace.
Carrier-leak	Faulty diodes Dc _{3 ~ 10} .	Check and replace.
	Faulty capacitor Cc _{9, 10} .	Check and replace.
	Faulty low-pass filter Lc _s .	Check and replace.



■ Preamp Unit (X08-1080-10)

Complaint	Possible cause	Repairs
No sound	Faulty transistors Qj ₁ ~ 4.	Check and replace.
Noise	Faulty transistors Qj _{1, 2} , resistors Rj _{5, 6, 25, 26} , and capacitors Cj _{1, 2, 21, 22} .	Check and replace.
Dynamic range	Faulty transistors Qj _{1, 2} and capacitors Cj _{1, 2} .	Check and replace.
Hum	Faulty capacitor Cj _{23, 24} .	Check and replace.
Poor output of low frequency at phono position	Faulty capacitor Cj _{15, 16, 19, 20} .	Check and replace.

■ Tone amp Unit (X11-1030-01)

No sound	Faulty transistors Qi _{1, 2} resistors Ri ₁ ~ 10. and capacitors Ci _{1, 2, 5, 6, 7, 8} .	Check and replace.
Noise	Faulty transistors Qi _{1, 2} , resistors Ri ₁ ~ 4, and capacitors Ci _{1, 2} .	Check and replace.
Boost and cut	Faulty potentiometers VRi _{1, 2} , and capacitors Ci ₉ ~ 16.	Check and replace.

■ Main amp Unit (X07-1100-00)

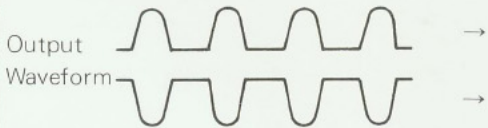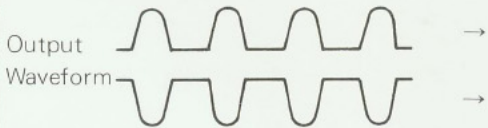
No sound. (protection relay is off.)	Under operating protections, faulty transistors Qe ₁ ~ 14.	Check and replace. (replacement order first Qe ₁₁ ~ 14, second Qe ₇ ~ 10, third Qe _{5, 6} , fourth Qe ₁ ~ 4).
Distortion	Faulty resistors Re _{31, 32} .	Check and replace.
	Under not operating protection, faulty transistors Qe ₁₃ ~ 15.	Check and replace.
	Faulty resistors Re ₂₉ ~ 32.	Check and replace.
(Cross-over distortion)	Output  Waveform 	Check resistors Re _{31, 32} .
		Check resistors Re _{29, 30} .
	Faulty diodes De _{3, 4} .	Check and replace.
Hum	Faulty capacitor Ce ₁₇ .	Check and replace.
Noise	Faulty transistors Qe ₁ ~ 4, capacitors Ce _{3, 4, 11, 12} , and diode De ₁₃ .	Check and replace.
Shock noise	Faulty capacitor Ce ₁₆ , and transistors Qe _{18, 19} .	Check and replace.

Complaint	Possible cause	Repairs
Bias voltage variation	Faulty transistors Qe _{1 ~ 4} , and diode De ₁₃ .	Check and replace.
Oscillation	Faulty capacitors De _{1, 2, 7, 8, 13, 14} and resistors Re _{33, 34} .	Check and replace.
Heated power transistor.	Faulty potentiometers VRe _{1, 2} , resistors Re _{21, 22} , and varistors De _{3, 4} .	Check and replace.
Heated drive stage transistor.	Faulty resistors Re _{29 ~ 32} .	Check and replace.
Misoperation of protection circuit.	Diodes and faulty diodes Des _{, 6} and resistor Qe ₁₅ .	Check and replace.
	Faulty diodes Des _{8 ~ 10} , transistor Qe ₁₆ .	Check and replace.

ADJUSTMENT

[BEFORE ADJUSTMENT]



- * Tuning dial is set to the proper point corresponding to no radio stations.
- * The sweep and the r.f. generator are set to the minimum response on oscilloscope as possible.
- * Connecting the r.f. generator to the antenna terminal using the dummy antenna . . . refer to figure.
- * Use the insulated screwdriver adjusting the i.f.t.
- * SELECTOR is FM AUTO position.
- * FM MUTING is OFF position except necessity.
- * Test point shown in the schematic diagram.

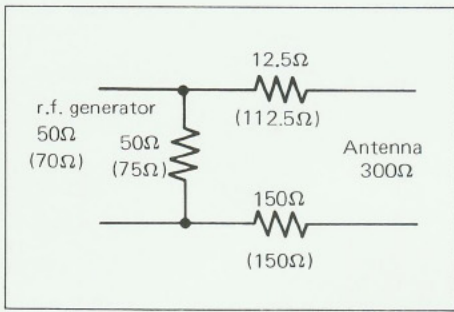


▲ Dummy antenna

[ADJUSTING FM-IFT]

1. Connect the sweep generator being set to 10.7 MHz to test point 1 (TP1) through a capacitor 3 pF.
2. Connect the oscilloscope to test point 2.
3. Adjust i.f. trans La8, Lb1 so that output is the best.

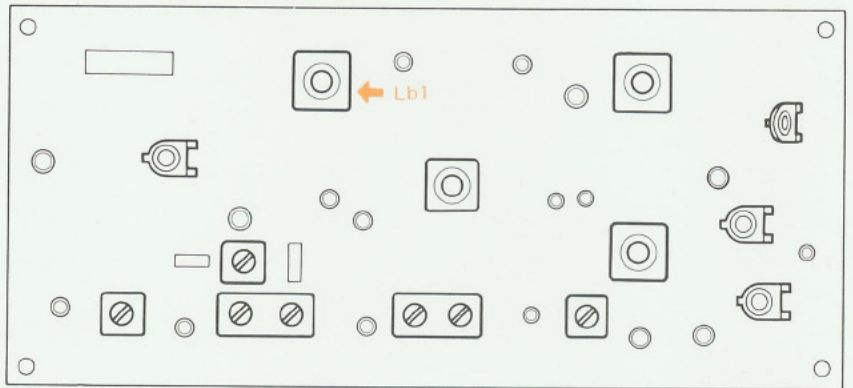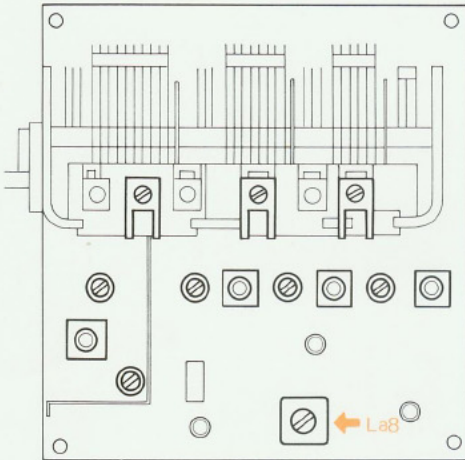


▼ Waveform of test point 2

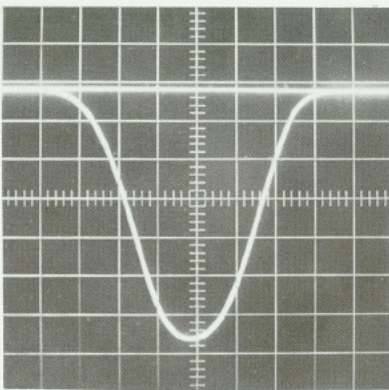


[ADJUSTING DISCRIMINATOR]

1. With no test equipments, adjust the secondary (top) of discriminator coil Lb3 so that tuning meter's pointer is between the center zone.
2. Connect d.c. voltmeter to test point 3.
3. Connect the r.f. generator being set 98 MHz, no modulation, antenna input of 5 ~ 7 μ V to antenna terminal.
4. Adjust trigger coil Lb6 so that voltmeter is max.
5. Adjust meter coil Lb5 so that signal meter is max.
6. Set the output of r.f. generator so that voltmeter is 2.5V at test point 3.
7. Adjust the potentiometer VRb3 so that voltmeter is 2V at test point 3.
8. Switch the output of r.f. generator being set antenna input of 7 μ V to antenna terminal.
9. Adjust the potentiometer VRb1 so that voltmeter is 1.4V at test point 3.
10. Connect the r.f. generator being set 98 MHz, modulation of 400 Hz, deviation of 75 kHz, to antenna terminal and the oscilloscope and VTVM to REC jack.
11. Adjust the primary (bottom) of discriminator coil Lb3 so that distortion is min.
12. Adjust the potentiometer VRb2 so that voltmeter is 1V at REC jack.

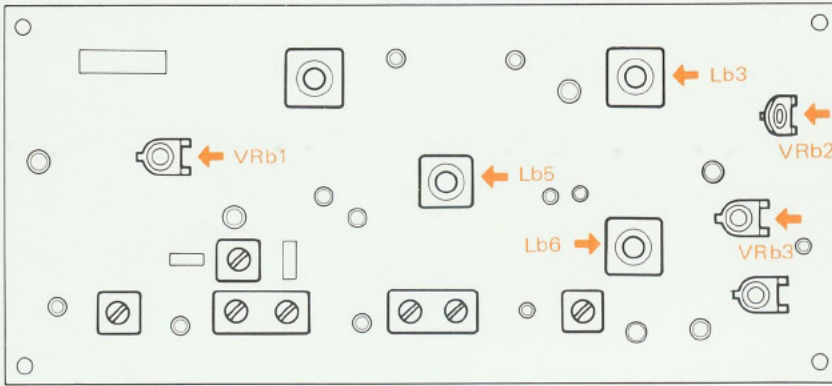


[ADJUSTING TRACKING]

1. Connect the r.f. generator to antenna terminal through a dummy antenna.
 2. Set the r.f. generator to 90 MHz, the modulation of 400 Hz, the deviation of 75 kHz, and the input of $10 \mu\text{V}$.
 3. Connect the VTVM to the recording jack (REC jack).
 4. Meet the dial pointer to 90 MHz on the dial calibrations.
 5. Adjust the core of r.f. trans La1 ~ 3 and local oscillator coil La4 so that the output is the maximum.
-
1. Set the r.f. generator to 106 MHz, the modulation of 400 Hz, the deviation of 75 kHz and the input of $10 \mu\text{V}$.
 2. Meet the dial pointer to 106 MHz on the dial calibrations.
 3. Adjust the trimmer CTa1 ~ 4 so that the output is the maximum.
- * If there is internal oscillation, adjust the trimmer CTa5.

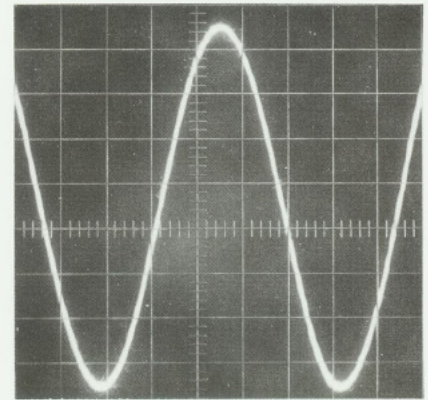


▲ Waveform of Rec jack

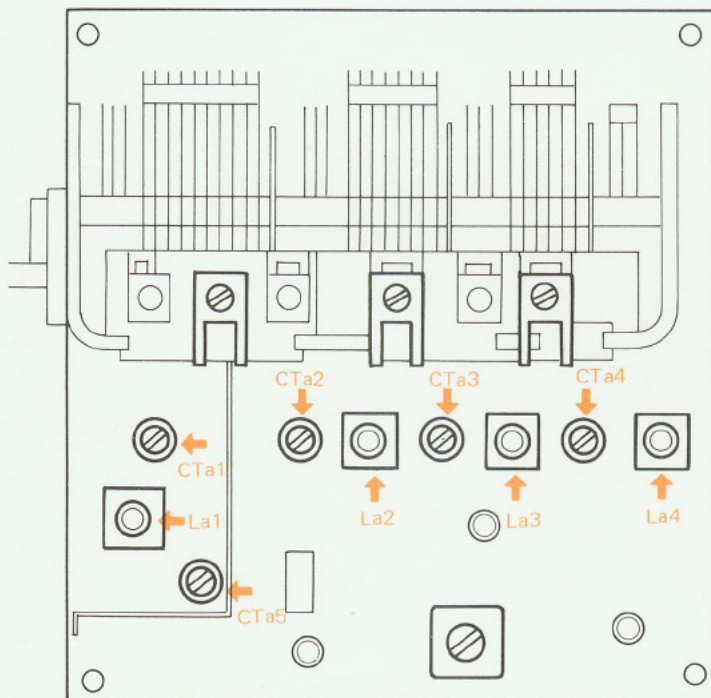

[ADJUSTING SCA FILTER]


1. Connect the audio generator being set to 67 kHz to the test point 4.
2. Connect the VTVM to the test point 5.
3. Adjust the core of Lc1 so that the output is the minimum.

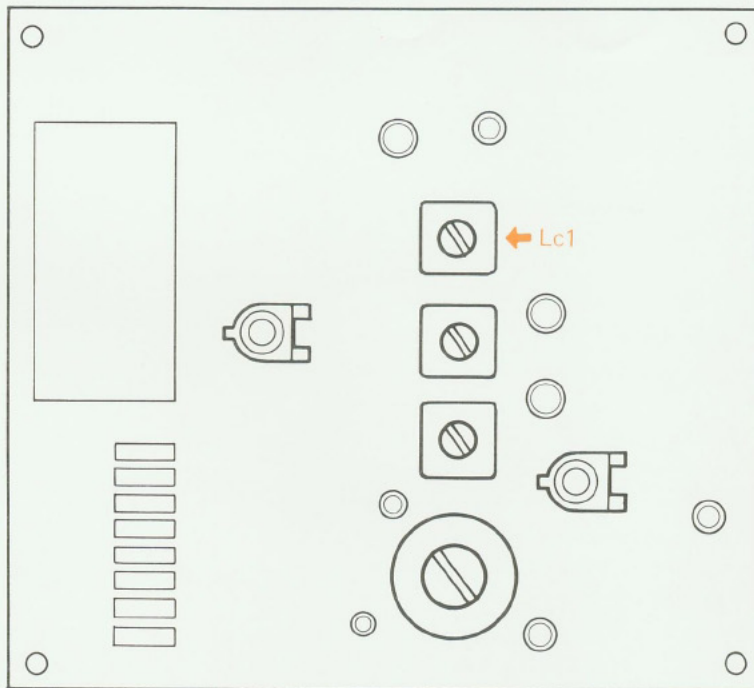

[ADJUSTING MPX]



1. Set the MPX generator to the following.
SELECTOR → A + B PHASE → NORMAL
MODULATION → 400 Hz DEVIATION → 67.5 kHz
2. Connect the r.f. generator to the antenna terminal and the VTVM to the test point 6.
3. Adjust the core of Lc2 ~ 4 so that the output is the maximum.
4. Switch the selector of MPX generator of A - B (reverse).
5. Remove the VTVM to the REC jack.
6. Adjust the core of Lc4 so that the output is the best.
7. Switch the selector and deviation of the MPX generator to A + B and 40 kHz.
8. Adjust the potentiometer VRC2 so that stereo indicator is on.
9. Switch the selector of the MPX generator to A (R).
10. Adjust the potentiometer VRc1 so that the output is the minimum.
11. Switch the selector of the MPX generator to B (L).
12. Adjust the potentiometer VRc1 so that the output is the minimum.

Note: In case of difference between right and left set the potentiometer (VRc1) to average.

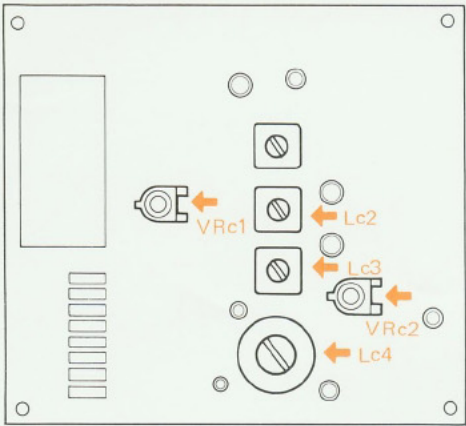

[ADJUSTING AM-IFT]



1. Connect the sweep generator being set to 455 kHz to antenna terminal.
2. Connect the oscilloscope to the test point 7.
3. Adjust the core of i.f. trans Lb13 ~ 15 so that the output is the best.

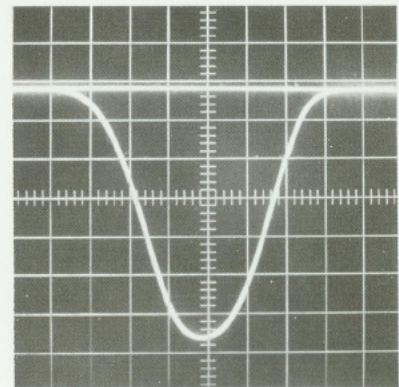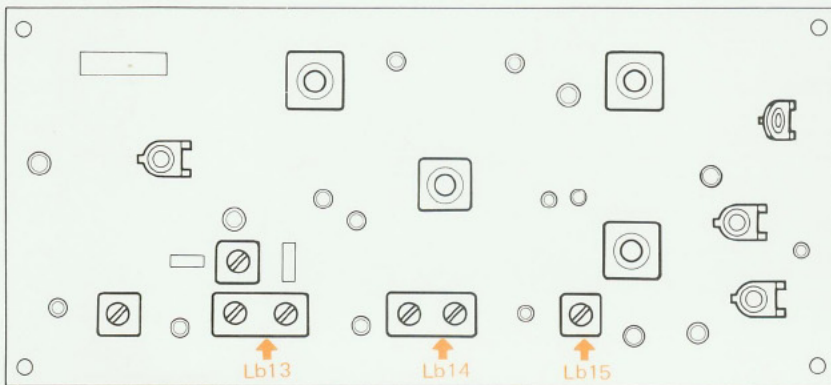

▲ Waveform of test point 7


[ADJUSTING TRACKING]

1. Connect the r.f. generator being set to 600 kHz, modulation of 30% at 400 Hz to antenna terminal.
 2. Connect the VTVM to the REC jack.
 3. Meet the dial pointer to the 600 kHz on the dial calibrations.
 4. Adjust the osc-trans. Lb11 r.f.-trans. Lb12 and ferrite antenna so that the output is the max.
-
1. Connect the r.f. generator being set to 1,400 kHz, modulation of 30% at 400 Hz to antenna terminal.
 2. Connect the VTVM to the REC jack.
 3. Meet the dial pointer to the 1,400 kHz on the dial calibrations.
 4. Adjust the trimmer CTa6 ~ 8 so that the output is the max.

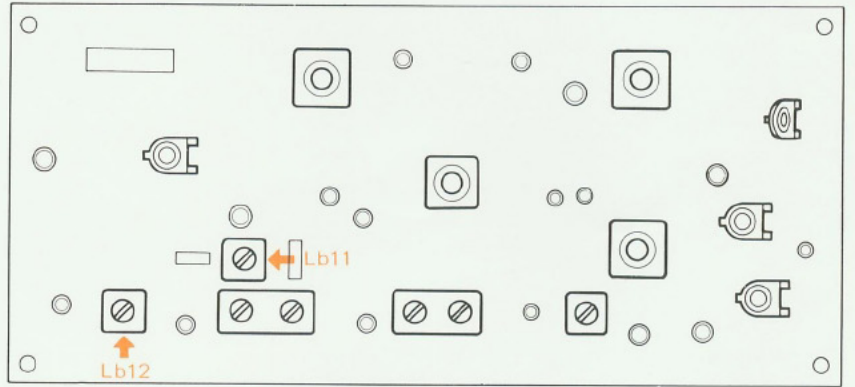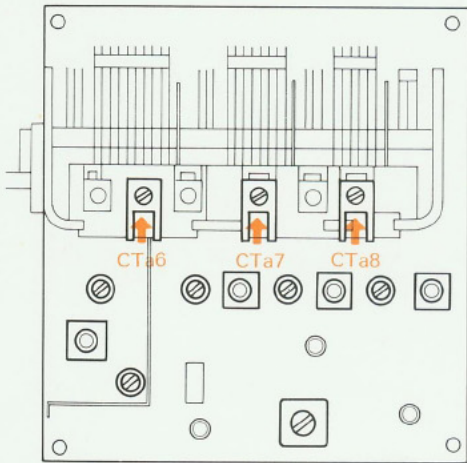

[ADJUSTING METER]

1. Connect the r.f. generator to antenna terminal.
2. Meet the dial pointer to the 1,000 kHz on the dial calibrations.
3. Adjust the potentiometer (VRb4) so that the signal meter indicates "5".

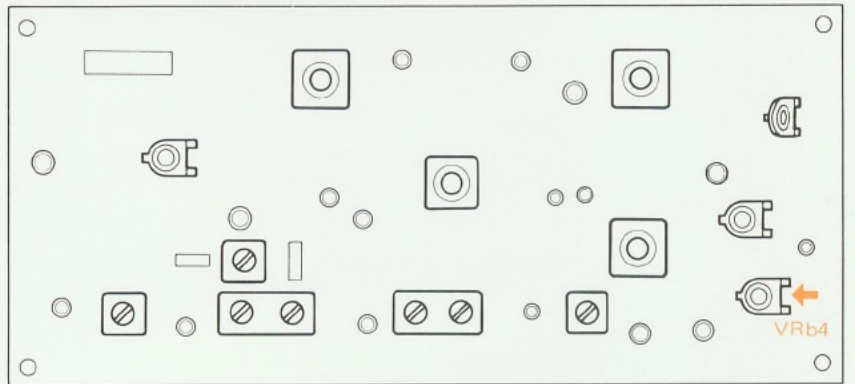

AUDIO ADJUSTMENT




[BIAS CURRENT]

In the case of using the voltmeter


1. Connect the voltmeter across the emitter resistor of power transistors.
2. Check the voltmeter to be 20mV.
3. If not, turn the PC trimmer potentiometer (VRe1, 2) so that the meter has rating value.

In the case of using the audio generator and oscilloscope, etc.

1. Connect the dummy load (8Ω) to speaker terminal and do the oscilloscope across the dummy.
2. Feed the signal (1 kHz) to the set.
3. Check the waveform to be the best.
4. If not, turn the PC trimmer potentiometer (VRe1, 2) so that the waveform is distortionless.
5. Check the voltmeter to be 20mV.

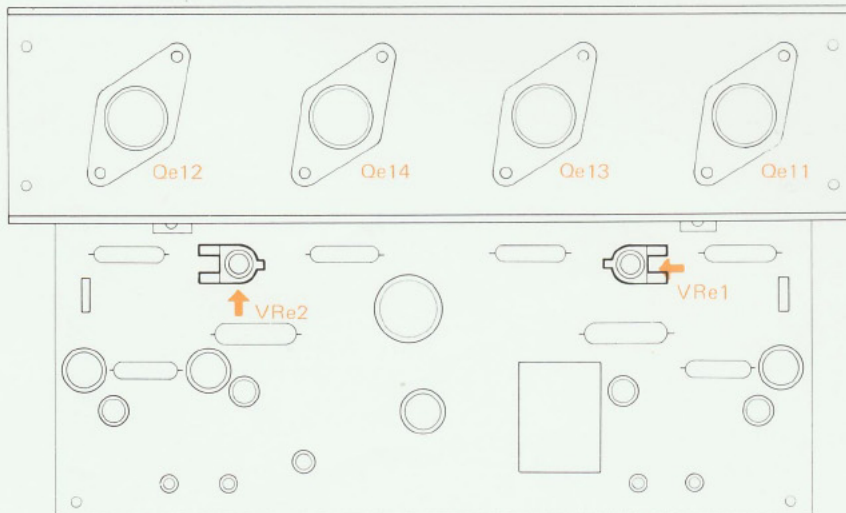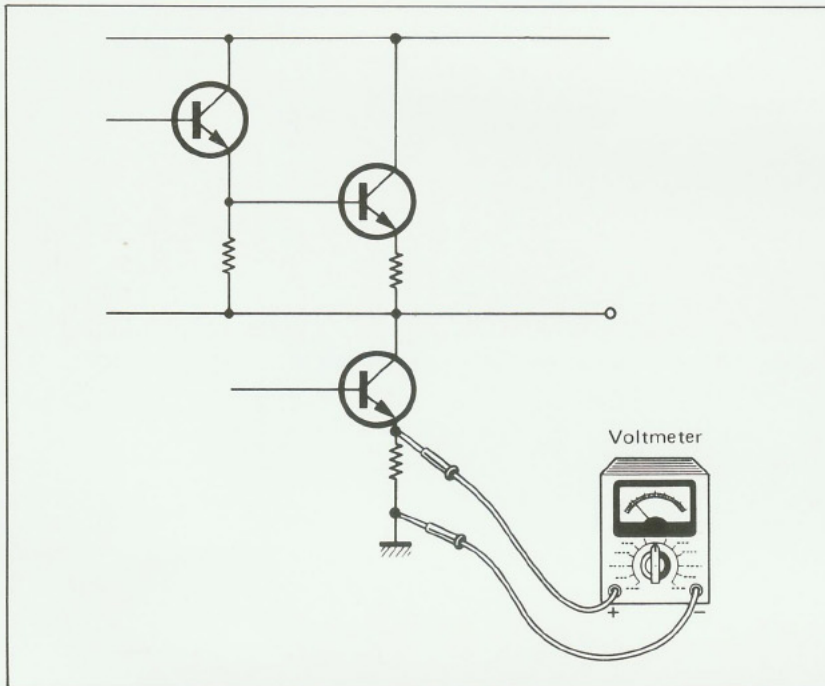

Distorted waveform



Best waveform

HOW TO REPLACE POWER TRANSISTOR


[REPLACING POWER TRANSISTOR]

1. Remove screws (not tapping screw).
2. Replace the power transistor with new.

At this time, don't forget to spread silicone grease on faces of mylar.

3. Fix the power transistor with screw on the heat sink.
4. Check the transistor is not in contact with the heat sink.

- Note:**
1. Tapping screw holds the transistor socket. Don't remove it without necessity.
 2. Before fix the transistor, in the case of replacing transistor socket, do the transistor socket.

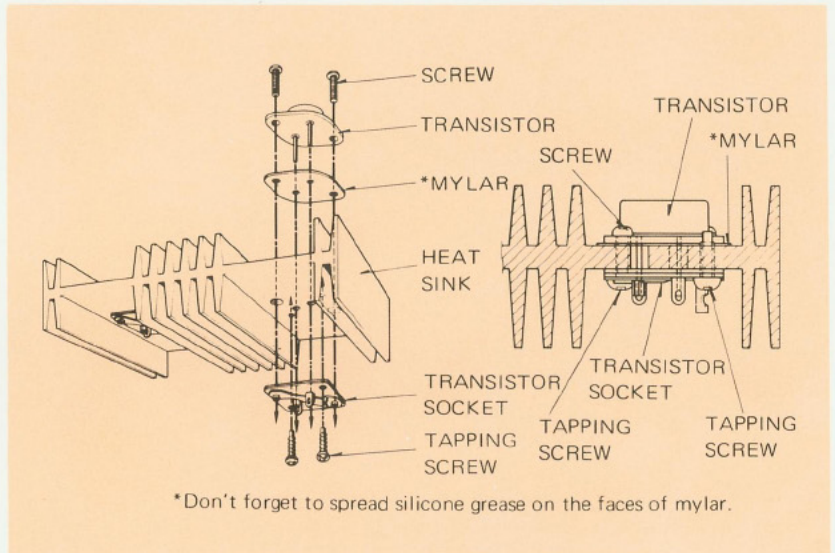


Caution: KR-5200 has different heat sink being drawn in illustration.

MOUNTING TEMPLATE

DIRECTIONS FOR PANEL MOUNTING


1. Remove the walnut cabinet.
2. Locate the supporting shelf at the height you wish the receiver positioned.
3. Remove the four bottom legs.
4. An air space must be made between the bottom of the set and the supporting shelf to assure good ventilation and cool operation. This space can be made by placing two boards which measure $\frac{9}{16}$ " thick by 1" to 2" width between chassis and the supporting shelf.
5. Make panel cutout in the size shown at left $4\text{-}\frac{7}{8}$ " x $16\text{-}\frac{5}{16}$ ". The bottom of the cutout should be flush with the bottom plate of the receiver, as shown in the side view. The distance between the bottom of the cutout and the top of the supporting shelf is $\frac{9}{16}$ ".
6. The receiver is held in place by two bolts. The holes must be made in the shelf to correspond with the holes in the receiver. Use the "Top View" to locate these holes on the supporting shelf. The holes should be made $\frac{1}{4}$ " in diameter or somewhat larger.

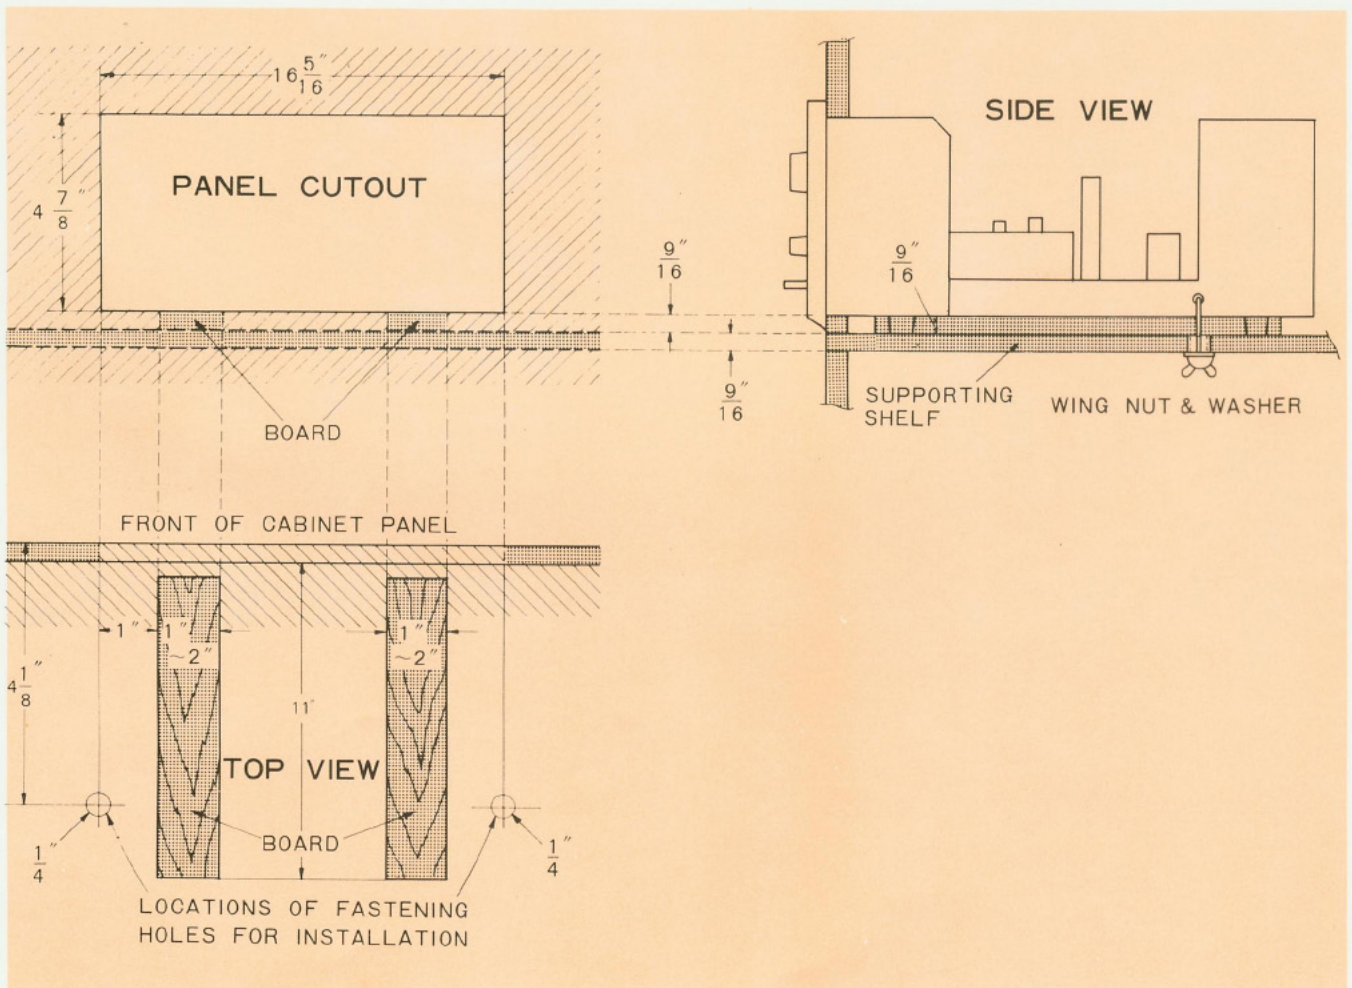


THE ROTARY SWITCH

- See Fig. 1, for an example.
- S1 means one of rotary switches, number 1 SELECTOR switch.
- Namely, 2 means the 2nd wafer, and 3 means the 3rd wafer. Others are like so. (Fig. 2)
- The numbering of contact points are as shown in Fig. 3.

▼ Fig. 1

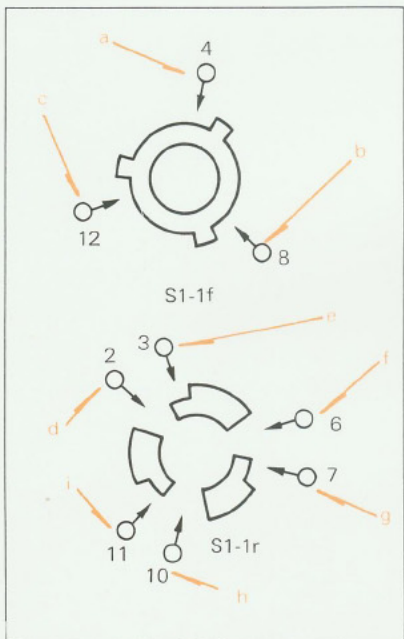


◎ means connection of the same contact point of rear and front wafer.

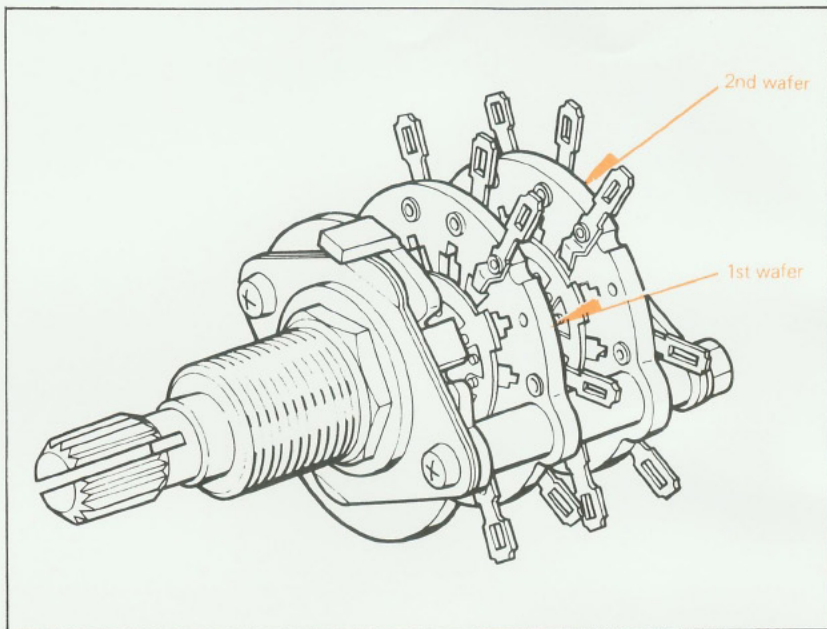

▲ Fig. 2

▼ Fig. 3

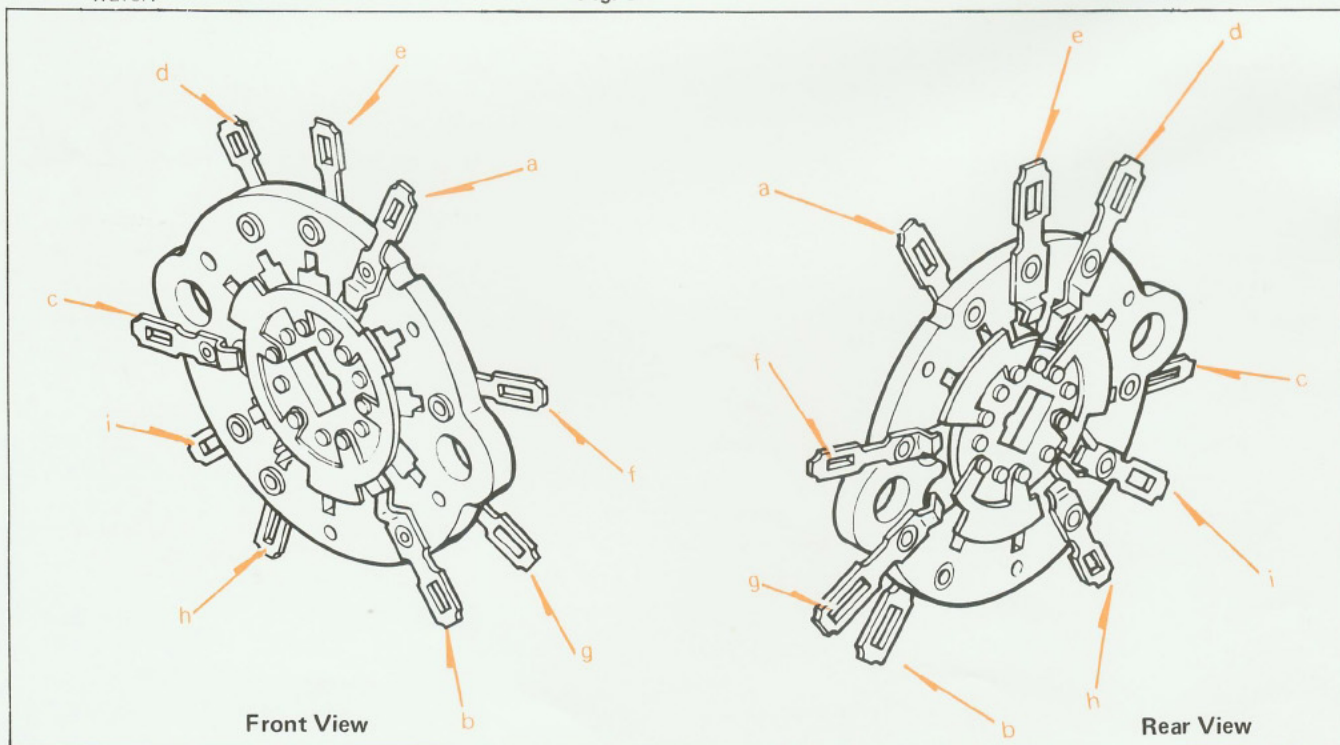

DIAL CORD STRINGING



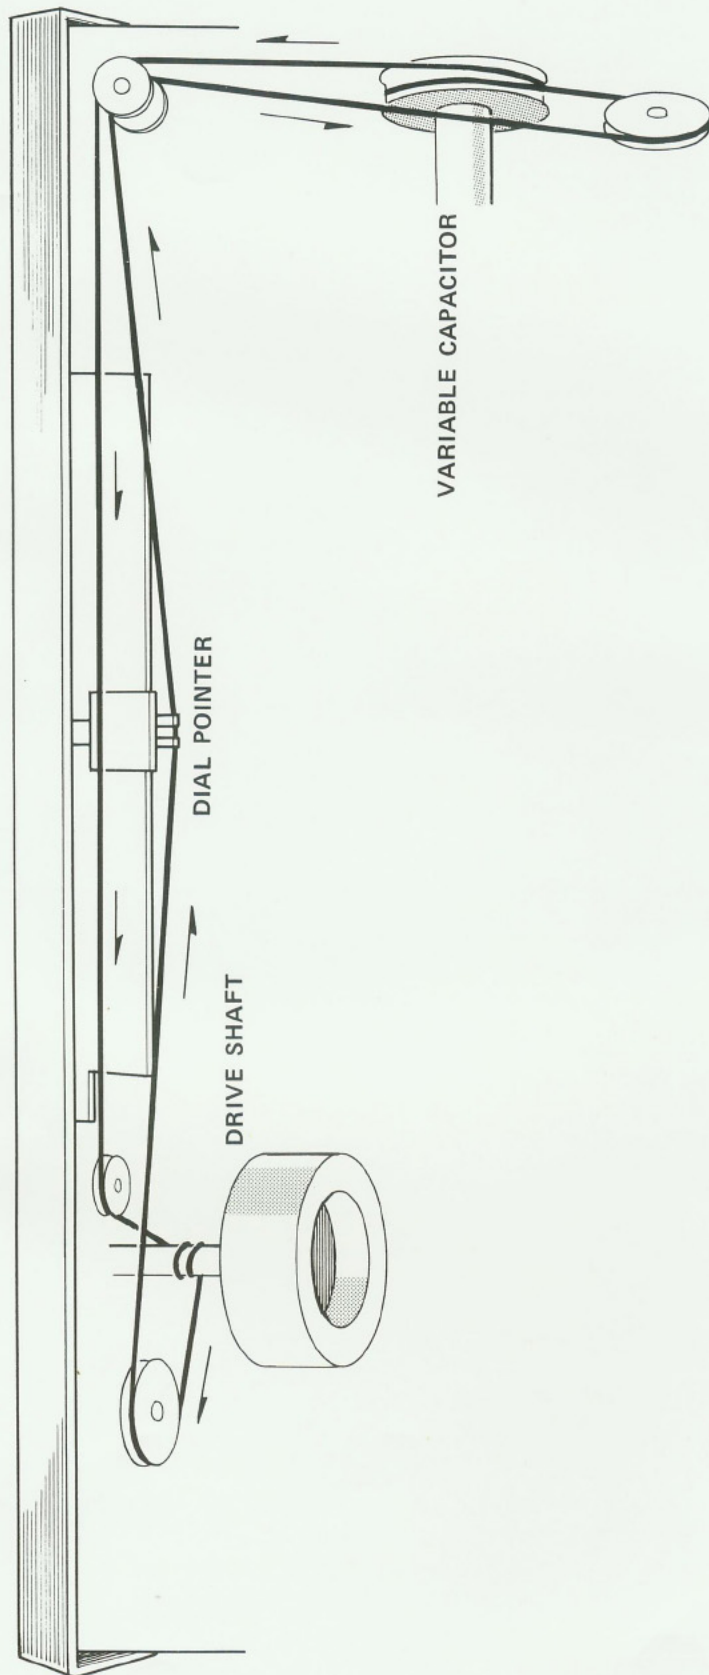


TABLE OF TRANSISTOR ABSOLUTE MAX. RATINGS



Transistor's name	VCBO	VCEO	VEBO	IC	IE	PC	TJ	hFE	Type
2SA620WL	-60V	-50V	-5V	-50mA	50mA	200mA	125°C	90 ~ 500	Si
2SA673A	-55V	-55V	-4V	-0.5A	0.5A	0.4W	125°C	60 ~ 200	Si
2SA743A	-80V	-80V	-4V	1A	1A	750mW	150°C	40 ~ 320	Si
2SC381	40V	30V	4V	20mA	-20mA	100mW	125°C	40 ~ 80	Si
2SC458	30V	30V	5V	100mA	-	200mW	125°C	60 ~ 500	Si
2SC785R	40V	30V	4V	20mA	-20mA	100mW	125°C	40 ~ 80	Si
2SC941	35V	30V	4V	20mA	-20mA	200mW	125°C	40 ~ 140	Si
2SC945	50V	40V	5V	100mA	-	250mW	125°C	90 ~ 270	Si
2SC983	250V	150V	5V	50mA	-50mA	600mW	150°C	70 ~ 240	Si
2SC1000	55V	50V	5V	100mA	100mA	200mA	125°C	120 ~ 1200	Si
2SC1111	140V	80V	12V	6A	-	50W	150°C	30 ~ 60 50 ~ 100	Si
2SC1212A	90V	80V	4V	1A	-	750mW	150°C	60 ~ 120	Si
2SC1213A	55V	55V	4V	500mA	-500mA	400mW	125°C	60 ~ 200	Si
2SC1345	55V	50V	5V	100mA	-100mA	200mW	125°C	400 ~ 1200	Si
2SC1416A	55V	50V	5V	50mA	-50mA	200mW	150°C	200 ~ 700	Si
2SD220	80V	50V	7V	1A	-1A	500mW	-	70 ~ 400	Si

VCBO : Collector to base voltage	IE : Emitter current
VCEO : Collector to emitter voltage	PC : Maximum power disposition
VEBO : Emitter to base voltage	TJ : Operating junction temperature
IC : Collector current	Si : Silicon transistor

EXTERNAL VIEW

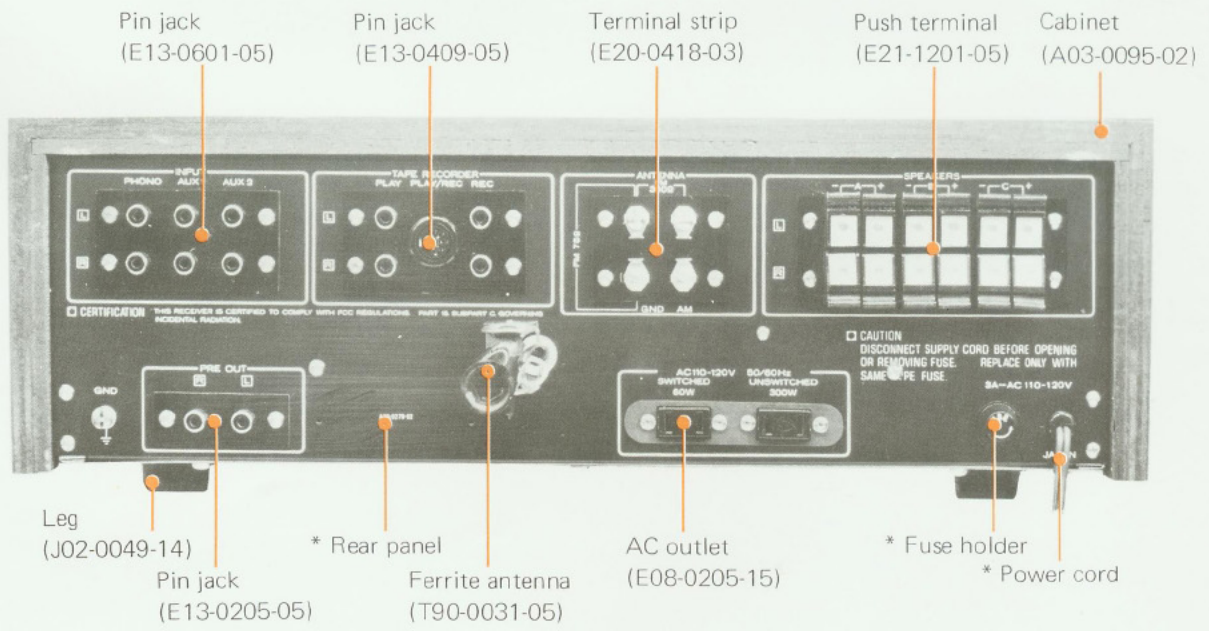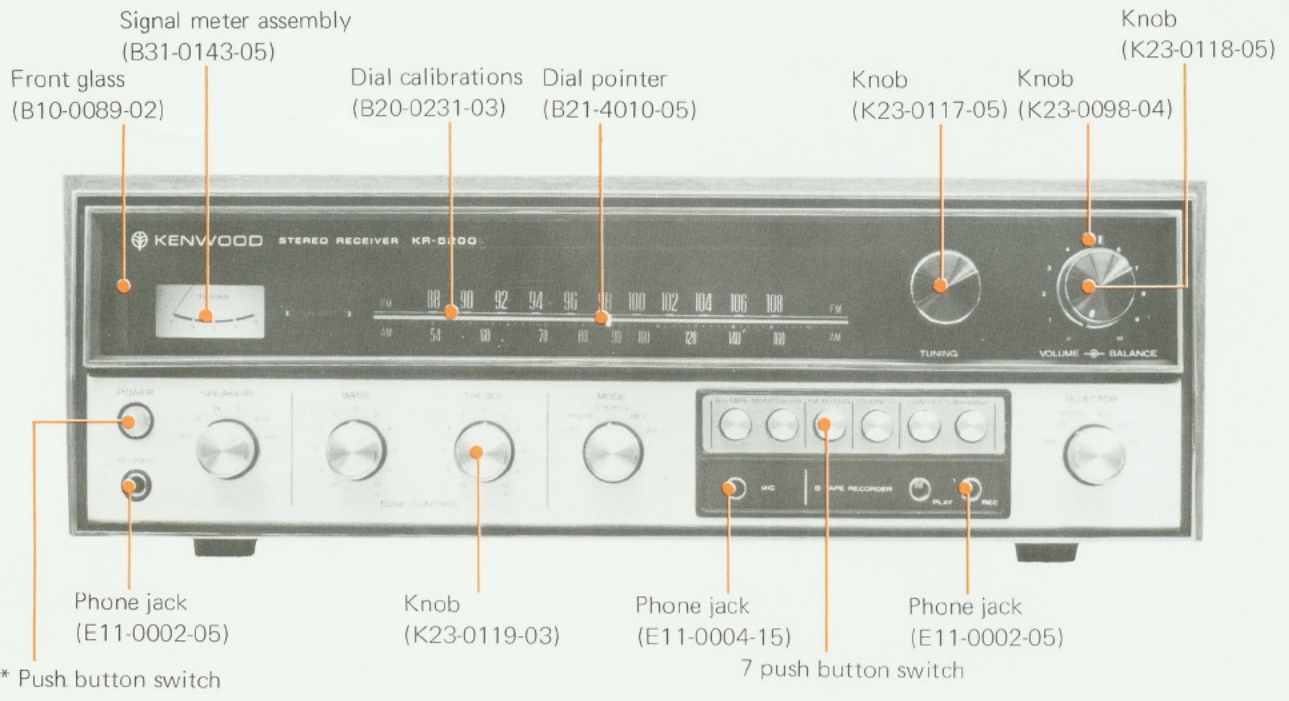

TOP & BOTTOM CHASSIS VIEW

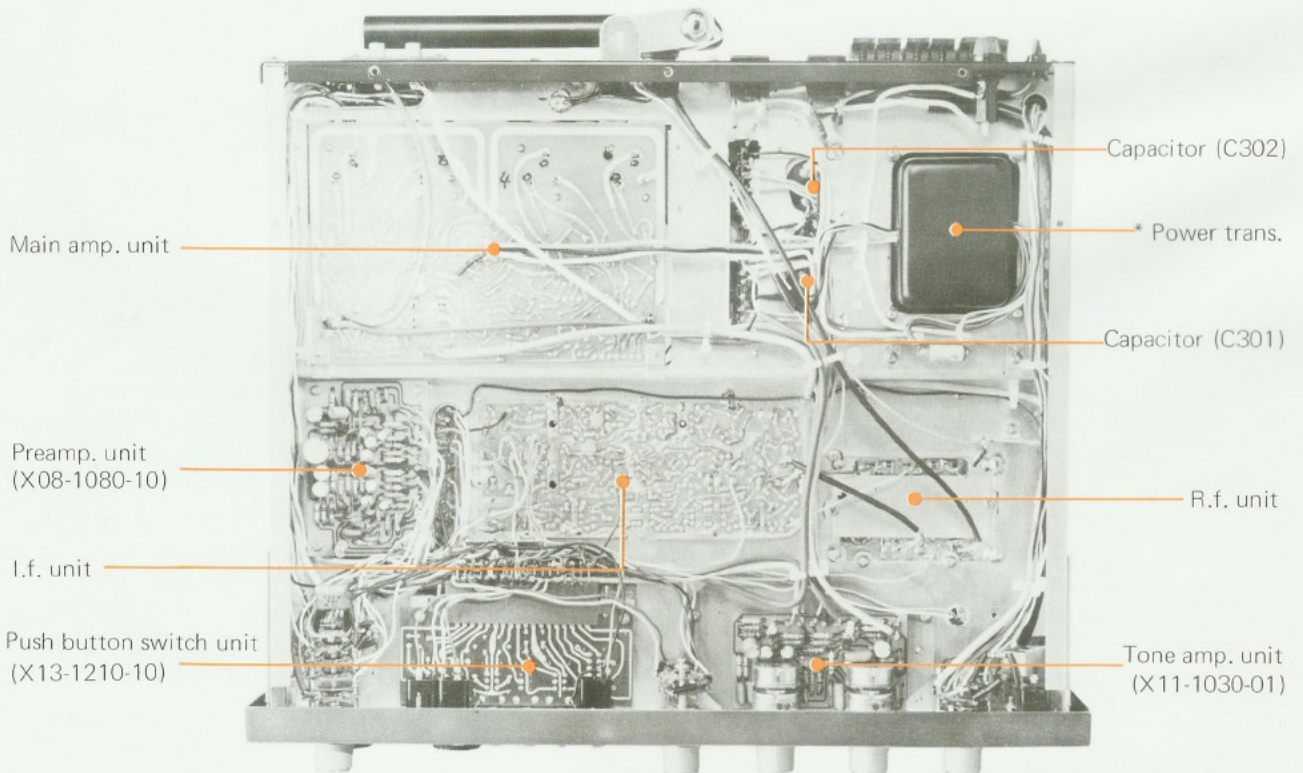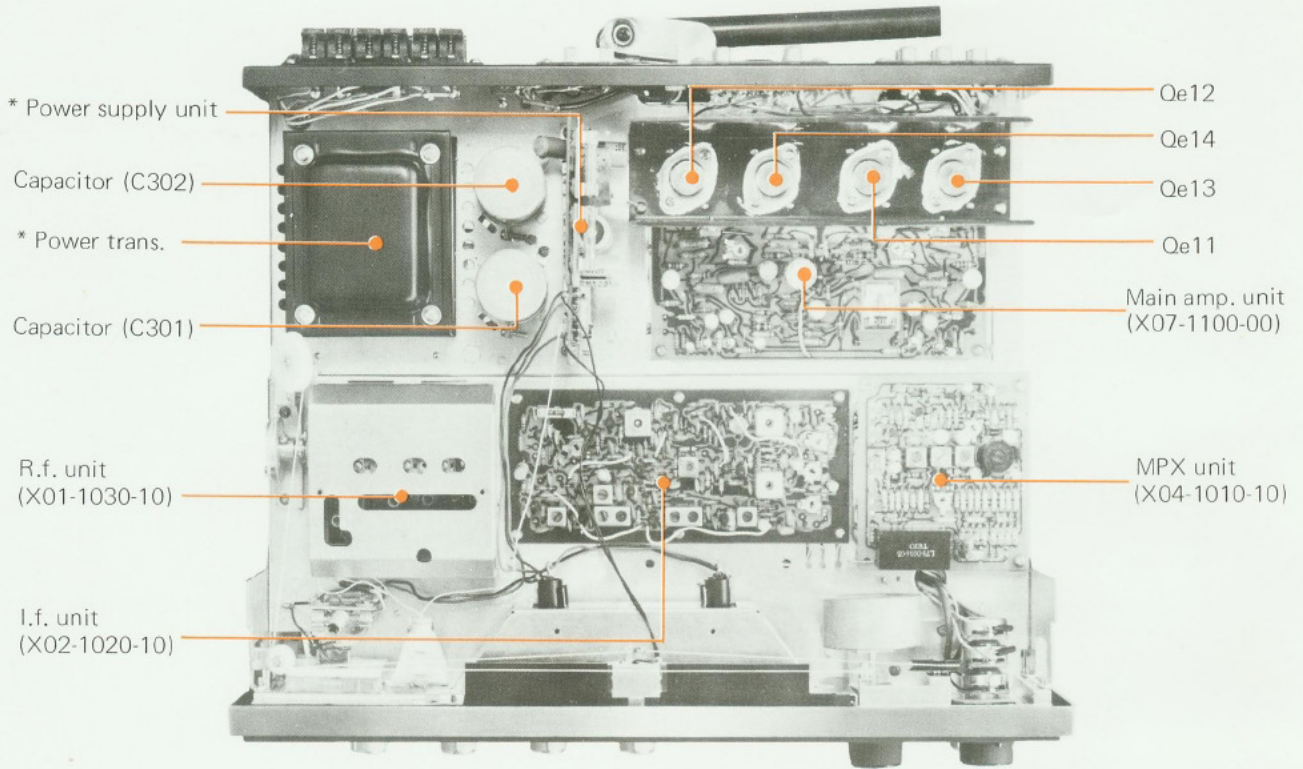

* Refer to the parts list.

PARTS LIST


Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
C100	CE04W0F221	Electrolytic 220 μ F 3.15WV	
C101	CQ93M1H224M	Mylar 0.22 μ F \pm 20%	
C120	CK45D1H561M	Ceramic 560pF \pm 20%	
C220	CK45D1H561M	Ceramic 560pF \pm 20%	
C300	C90-0029-05	Oil filled 0.01 μ F +100% -0%	
C301, 302	C90-0134-05	Electrolytic 4700 μ F 50WV	
RESISTOR			
R110	PD14BY2E103J	Carbon 10k Ω \pm 5% 1/4W	
R120	PD14BY2E394J	Carbon 390k Ω \pm 5% 1/4W	
R121	PD14BY2E104J	Carbon 100k Ω \pm 5% 1/4W	
R122	PD14BY2E222J	Carbon 2.2k Ω \pm 5% 1/4W	
R123	PD14BY2E682J	Carbon 6.8k Ω \pm 5% 1/4W	
R124	PD14BY2E473J	Carbon 47k Ω \pm 5% 1/4W	
R170	RC05GF2H471K	Carbon 470 Ω \pm 10% 1/2W	
R210	PD14BY2E103J	Carbon 10k Ω \pm 5% 1/4W	
R220	PD14BY2E394J	Carbon 390k Ω \pm 5% 1/4W	
R221	PD14BY2E104J	Carbon 100k Ω \pm 5% 1/4W	
R222	PD14BY2E222J	Carbon 2.2k Ω \pm 5% 1/4W	
R223	PD14BY2E682J	Carbon 6.8k Ω \pm 5% 1/4W	
R224	PD14BY2E473J	Carbon 47k Ω \pm 5% 1/4W	
R270	RC05GF2H471K	Carbon 470 Ω \pm 10% 1/2W	
R300	RC05GF2H225K	Carbon 2.2M Ω \pm 10% 1/2W	
POTENTIOMETER			
VR1	R11-9003-05	VOLUME 50k Ω (B) 3 gangs	
VR2	R11-9003-05	BALANCE 100k Ω (W) 3 gangs	
SWITCH			
S1	S04-5014-05	Rotary (SELECTOR)	
S2	S04-2043-05	Rotary (MODE)	
S10	S04-2036-05	Rotary (SPEAKERS)	
MISCELLANEOUS			
-	A03-0095-02	Cabinet	
-	A10-0312-01	Chassis	
-	A15-0018-02	Frame	
-	A15-0019-13	Frame assembly	
-	A20-0518-05	Panel	
-	A20-0521-03	Panel assembly	
-	A21-0094-02	Ornamental plate	
-	A30-0066-05	Dial board	
-	A40-0097-05	Bottom plate	
-	B07-0084-04	Black spacer	
-	B10-0089-02	Front glass	
-	B20-0231-03	Dial calibrations	
-	B21-4010-05	Dial pointer	
-	B30-0060-05	Pilot lamp (300mA) x 3	
-	B30-0064-05	Pilot lamp (50mA, stereo indicator)	
-	B30-0067-05	Meter pilot lamp	
-	B31-0143-05	Meter assembly	
-	B42-0009-04	Passed stickers	
-	B42-0352-14	Name plate (C)	

Ref. No.	Parts No.	Description	Remarks
—	B42-0353-14	Name plate (A)	
—	B52-0131-00	Schematic diagram	
—	D01-0009-05	Flywheel	
—	D15-0073-14	Middle size pulley x 2	
—	D15-0075-04	Small size pulley x 3	
—	D15-0104-04	Pulley	
—	D20-0092-05	Dial shaft	
—	E08-0205-15	AC outlet x 2	U.L.
—	E10-3601-05	36P PC board connector	
—	E11-0002-05	Phone jack (TAPE-REC, -PLAY, PHONE) x 3	
—	E11-0004-15	Phone jack (MIC)	
—	E13-0205-05	2P pin jack	
—	E13-0409-05	4P pin jack with DIN	
—	E13-0601-05	6P pin jack	
—	E15-0038-05	Pilot lamp socket x 3	
—	E20-0418-03	4P terminal strips	
—	E21-1201-05	12P push terminal (speaker)	
—	F07-0264-14	Dial cover	
—	G01-0045-04	Dial spring	
—	H01-0816-04	Carton case	
—	J02-0049-19	Leg x 4	
—	J19-0029-14	Front glass stopper	
—	J19-0250-14	Dial stopper	
—	J19-0251-14	Left side board	
—	J19-0252-34	Right side board	
—	J19-0266-04	Upper front glass stopper	
—	J19-0267-04	Lower front glass stopper	
—	J19-0276-04	Meter stopper	
—	J21-0192-04	Amp stopper	
—	J21-0480-13	Antenna mounting hardware	
—	J21-0972-04	MPX unit mounting hardware	
—	J21-0973-14	Pushbutton mounting hardware	
—	J21-0976-14	L shape mounting hardware	
—	J21-0977-04	Switch mounting hardware	
—	J21-0989-14	Pilot lamp mounting hardware	
—	J21-1001-04	Frame mounting hardware	
—	J21-1005-04	Pilot lamp mounting hardware	
—	J25-0768-04	DIN PC board	
—	K23-0098-04	Knob (BALANCE)	
—	K23-0117-03	Knob (TUNING)	
—	K23-0118-03	Knob (VOLUME)	
—	K23-0119-03	Knob (MODE, SELECTOR, TONE, SPEAKERS) x 5	
—	K29-0115-04	Knob (POWER)	
—	K29-0117-04	Knob (pushbutton) x 6	
T1	L19-0009-05	Balun transformer	
L1	L33-0025-05	Choke coil (1 μ H)	


Ref. No.	Parts No.	Description	Remarks
—	T90-0002-05	FM indoor antenna	
T2	T90-0031-05	Ferrite antenna	
—	X01-1030-10	FM-RF unit	
—	X02-1020-10	IF unit	
—	X04-1010-10	MPX unit	
—	X07-1100-00	MAIN AMP unit	
—	X08-1080-10	PRE AMP unit	
—	X11-1030-01	TONE AMP unit	
—	X13-1210-10	Pushbutton unit	
In North America add to the following parts.			
—	A23-0279-02	Rear panel	
—	B40-0463-04	Model name plate — only U.S.A.	
—	B40-0622-04	Model name plate — only Canada	
—	B42-0359-04	UL caution sticker x 2	
—	B46-0002-00	Warranty card (light blue) — only U.S.A.	
—	B46-0021-00	Warranty card (light blue) — only Canada	
—	B50-0825-00	Instruction manual	
—	B58-0043-00	Carton case caution card	
—	E30-0046-05	Power cord	UL
—	F05-3021-05	Fuse (3A) — only U.S.A.	UL
—	F05-3022-05	Fuse (3A) — only Canada	
—	H03-0135-14	Carton case	
—	J13-0016-15	Fuse holder	UL
—	J20-0227-14	AC outlet mounting hardware	
—	L03-0066-05	Power transformer — only U.S.A.	
—	L05-0014-05	Power transformer — only Canada	
CR1	R90-0097-05	Spark killer — only U.S.A.	
S9	S39-2002-05	Pushbutton switch (POWER)	UL
—	X00-1170-10	Power supply unit	
In other area, do . . .			
—	A23-0280-02	Rear panel	
—	B40-0646-04	Model name plate	
—	B46-0022-00	Warranty card (yellow)	
—	B46-0023-00	Warranty card (yellow)	
—	B50-0826-00	Instruction manual	
—	B58-0139-00	Power supply caution card	
—	B58-0144-00	Power voltage selector caution card	
—	B58-0146-00	Spare fuse caution card	
—	B59-0018-00	KENWOOD service stations' list	

Ref. No.	Parts No.	Description	Remarks
-	D32-0021-04	Switch stopper	
-	E30-0034-05	Power cord	
-	F05-2023-05	Fuse (2A)	
-	F05-3022-05	Fuse (3A)	
-	J13-0033-05	Fuse holder	
-	L03-0066-05	Power transformer	
CR1	R90-0097-05	Spark killer	
-	S31-2001-05	Slide switch (power voltage selector)	SEV
S9	S39-2003-05	Pushbutton switch (POWER)	
-	X00-1170-81	Power supply unit	

SCHEMATIC DIAGR

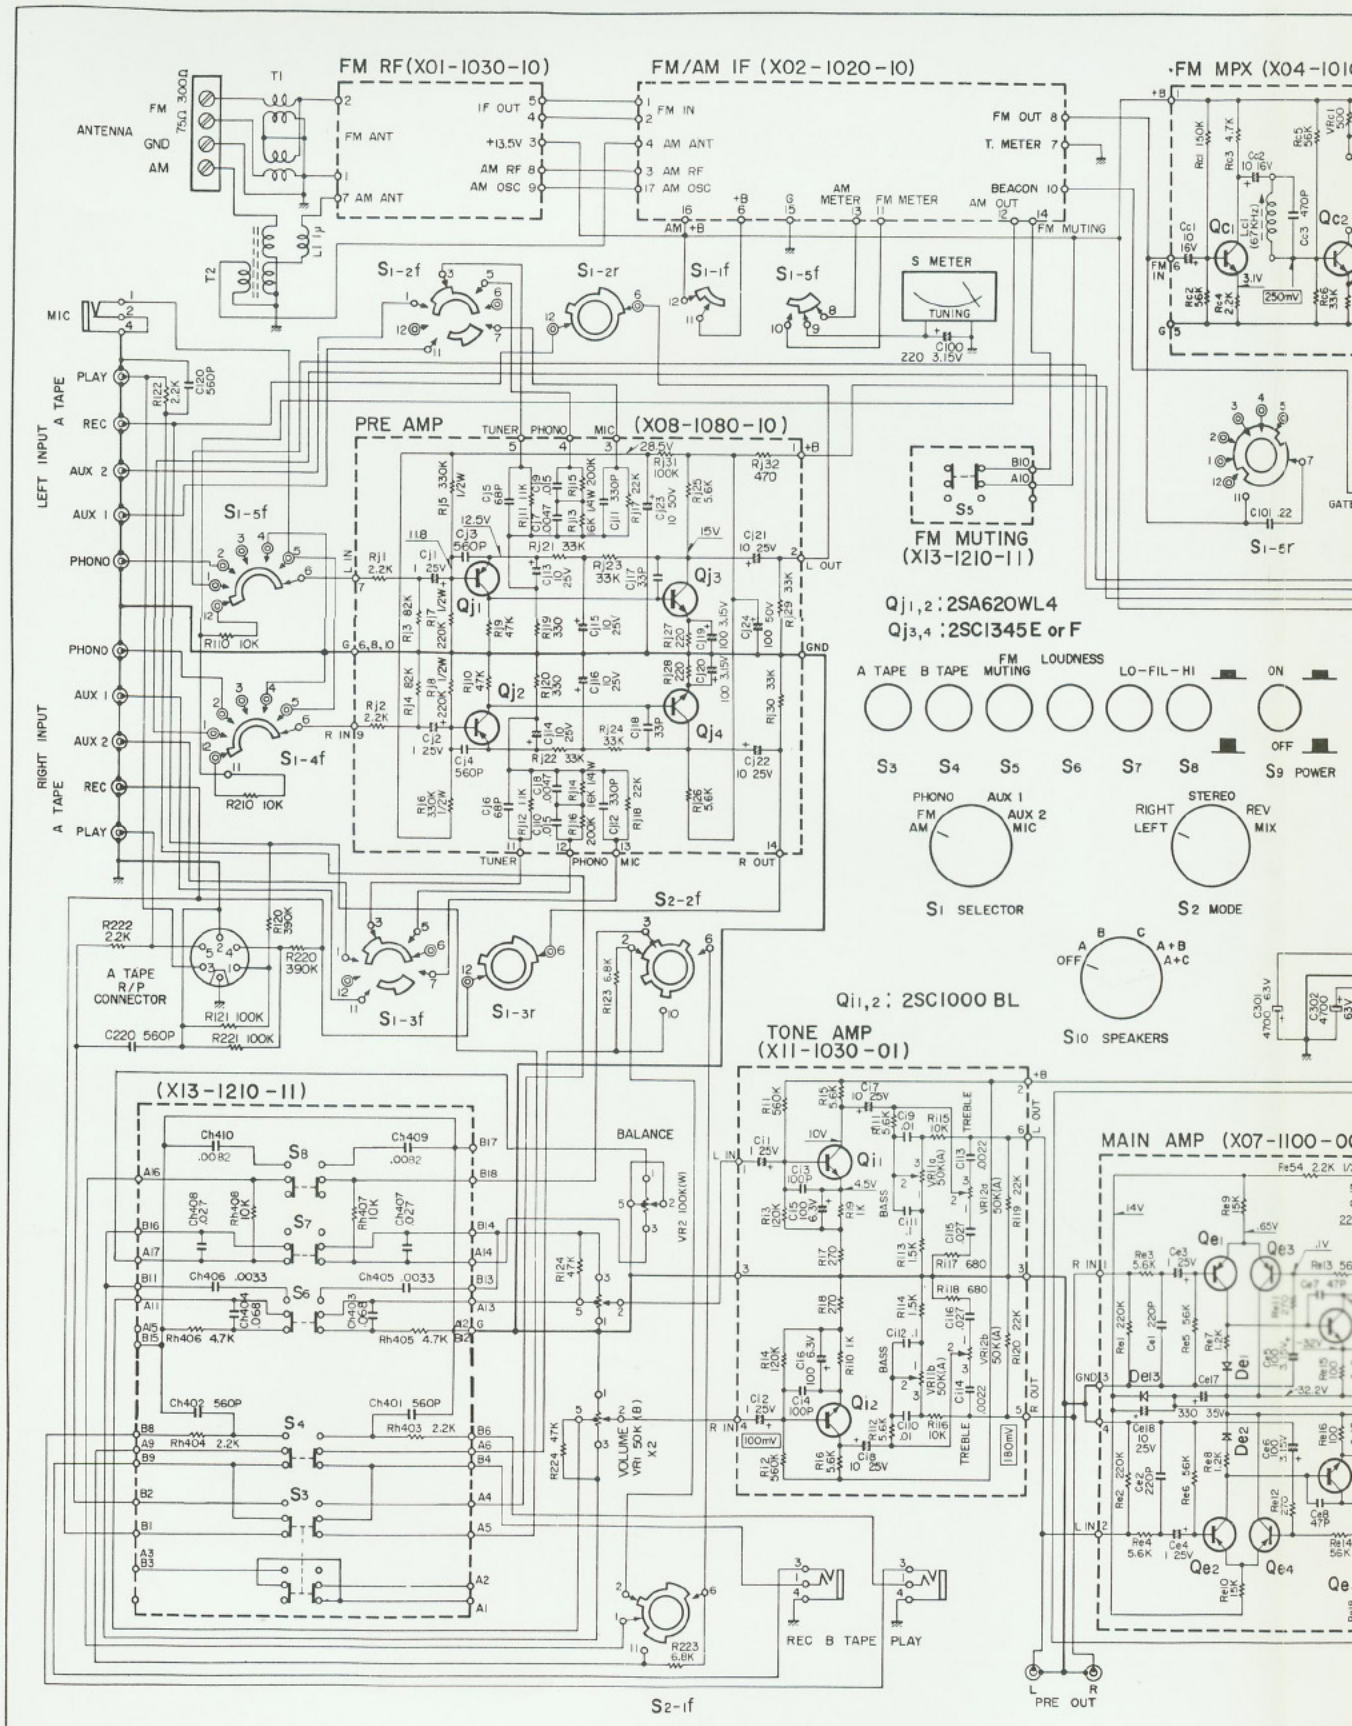

SCHEMATIC DIAGRAM (2)

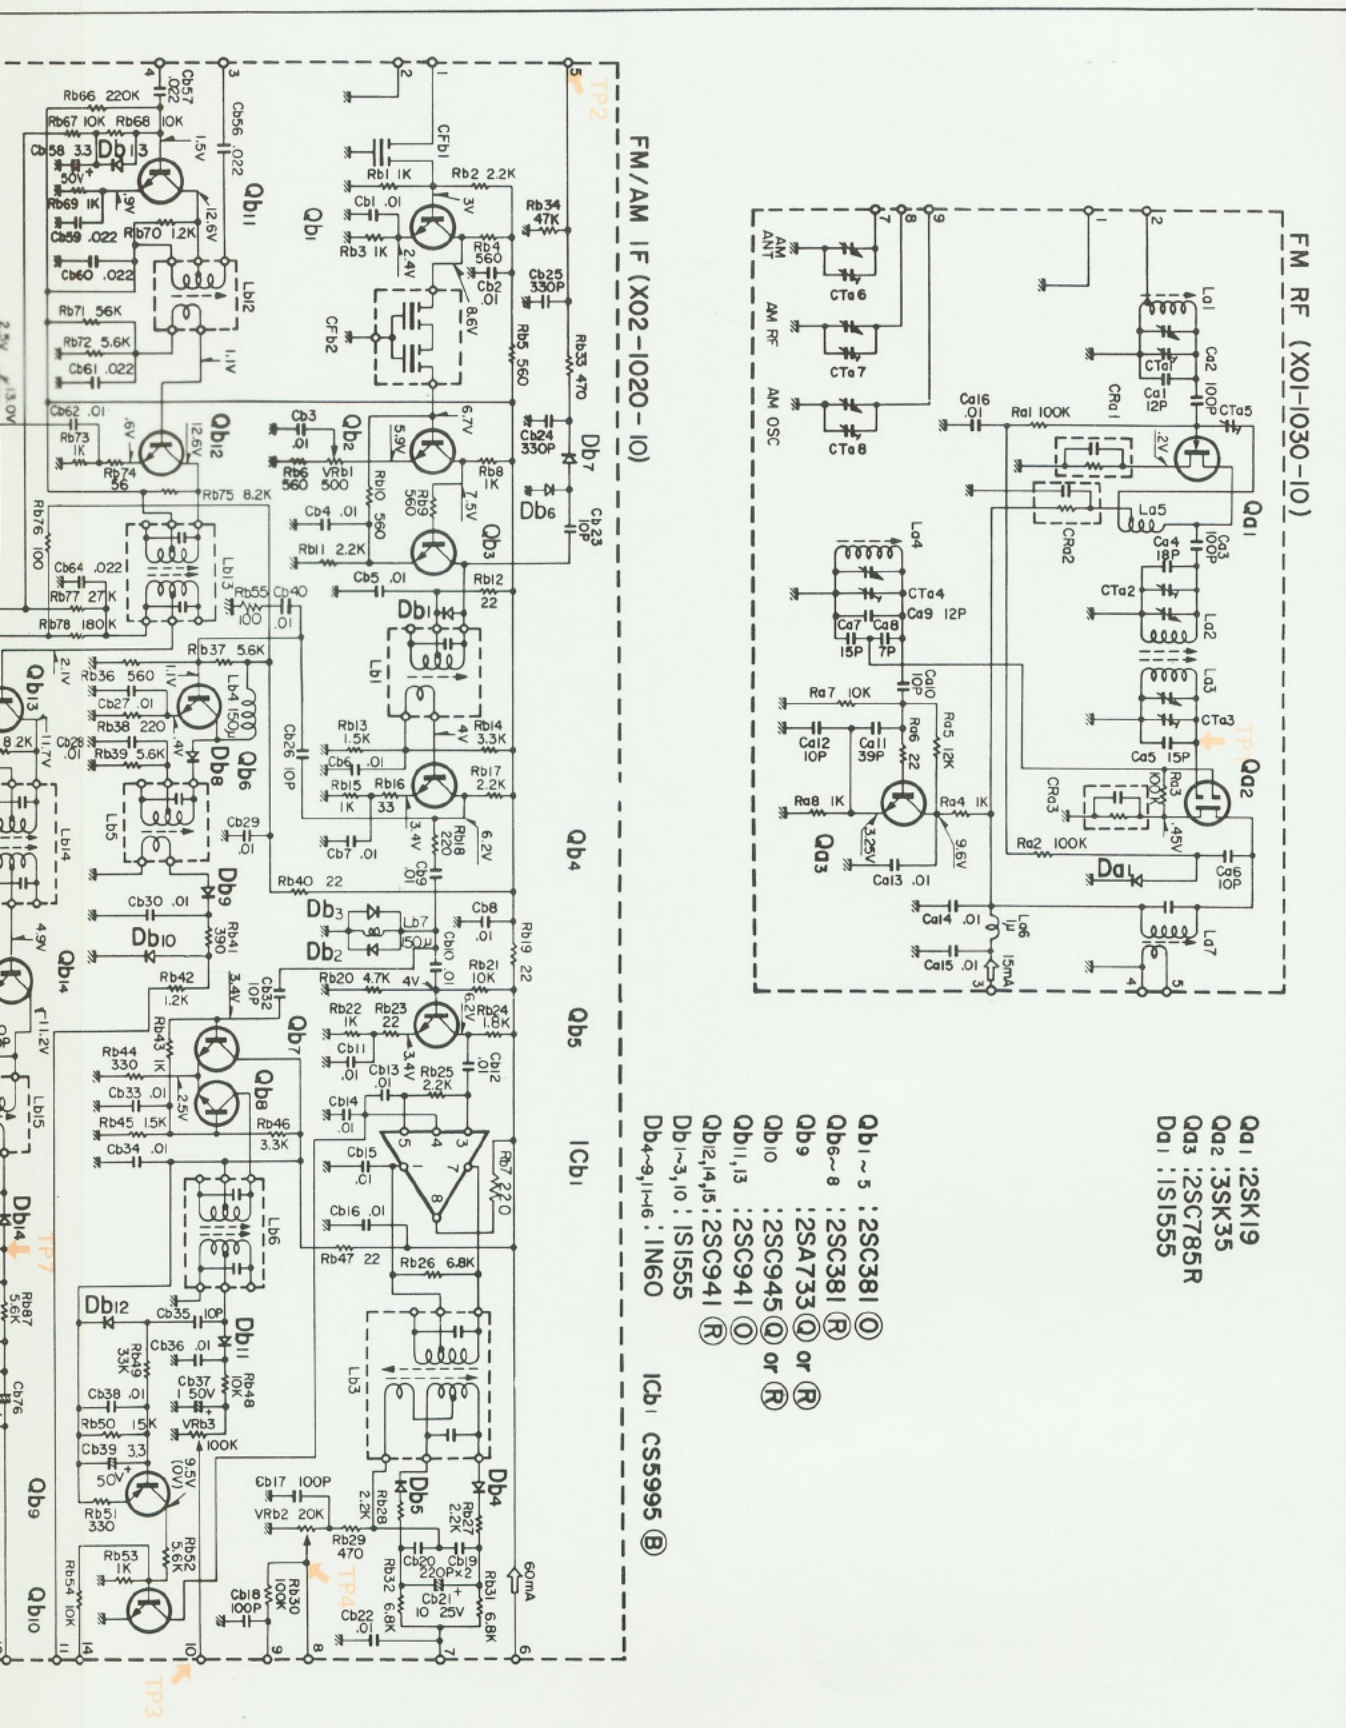

FM/AM IF (X02-1020-10)


FM RF (X01-1030-10)

Qb1 Qb2 Qb3 Qb4 Qb5 Icb1

- Qd1 : 2SK19
- Qd2 : 3SK35
- Qd3 : 2SC785R
- Da1 : 1S1555
- Qb1 ~ 5 : 2SC381 (O)
- Qb6 ~ 8 : 2SC381 (R)
- Qb9 : 2SA733 (O) or (R)
- Qb10 : 2SC945 (O) or (R)
- Qb11,13 : 2SC941 (O)
- Qb12,14,15 : 2SC941 (R)
- Db1 ~ 3,10 : 1S1555
- Db4 ~ 9,11 ~ 6 : 1N60
- Icb1 : CS5995 (B)

- Qd1 : 2SK19
- Qd2 : 3SK35
- Qd3 : 2SC785R
- Da1 : 1S1555


SCHEMATIC DIAGRAM (

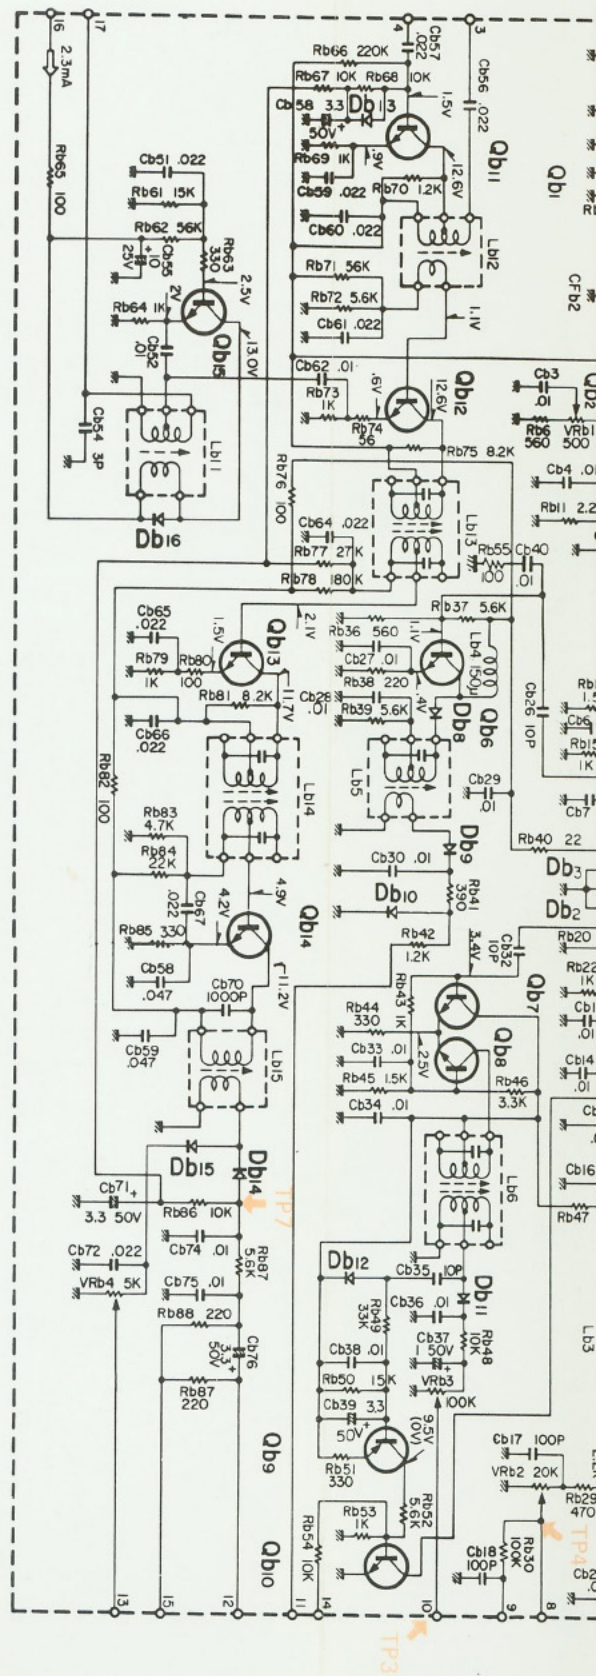


FOR KR-5200

REVISED CIRCUITS


■ For 110-120/220-240V area (1)

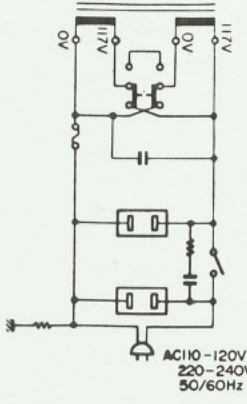



■ For 110-120/220-240V area (2)

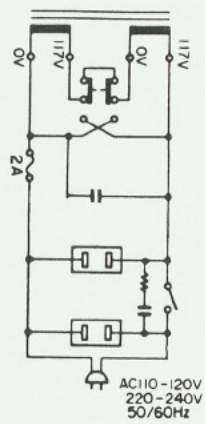

■ For the sets sold in Europe except England.

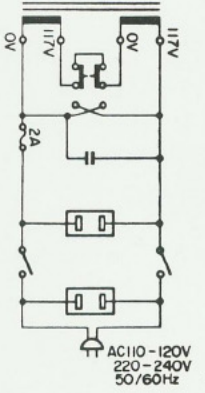

■ For the sets sold in Canada only.

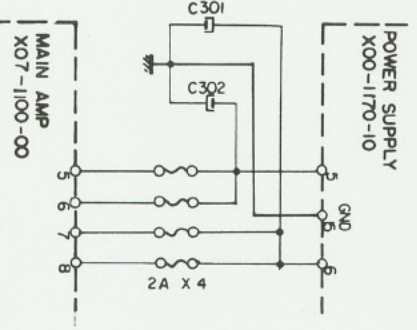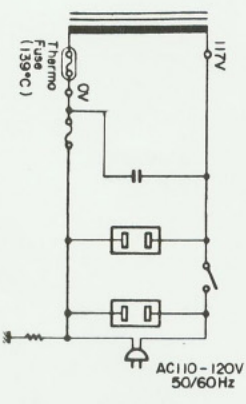


FOR KR-5200

COLOR CODE


RESISTOR

COLOR (meaning)	1st (value)	2nd (value)	3rd (multiplier)	4th (tolerance)
Black	0	0	10^0	—
Brown	1	1	10^1	$\pm 1\%$
Red	2	2	10^2	$\pm 2\%$
Orange	3	3	10^3	—
Yellow	4	4	10^4	—
Green	5	5	10^5	—
Blue	6	6	10^6	—
Purple	7	7	10^7	—
Grey	8	8	10^8	—
White	9	9	10^9	—
Gold	—	—	10^{-1}	$\pm 5\%$
Silver	—	—	10^{-2}	$\pm 10\%$
Non-color	—	—	—	$\pm 20\%$

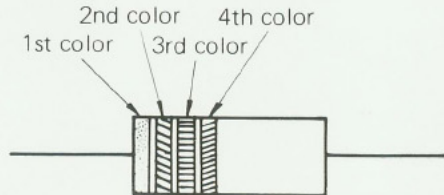

CAPACITOR (MICA)

COLOR (meaning)	1st (grade)	2nd (value)	3rd (value)	4th (multiplier)	5th (tolerance)	6th (characteristic)
Black	X	0	0	10^0	$\pm 20\%$	—
Brown	—	1	1	10^1	$\pm 1\%$	B
Red	Z	2	2	10^2	$\pm 2\%$	C
Orange	—	3	3	10^3	—	D
Yellow	—	4	4	10^4	—	E
Green	—	5	5	—	* $\pm 5\%$	—
Blue	—	6	6	—	—	—
Purple	—	7	7	—	—	—
Grey	Y	8	8	—	—	—
White	—	9	9	0.1	$\pm 10\%$	—

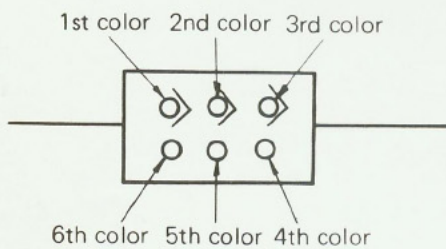

Unit = pF

* Capacitance being less than 10pF is $\pm 0.5\text{pF}$ on tolerance.

CAUTION


In service manual of KR-series (KR-7200, KR-6200, KR-5200), correct the transistor figure of 2SA620WL to the below. And also in PREAMP (X08-1080-10) of service manual, correct 2SC620WL to 2SA620WL.

2SA620WL



Error

2SA620WL



Correct

KENWOOD ELECTRONICS, INC
15777 So. Braodway
Gardena, California 90240


ADJUSTMENT OF AUDIO SECTION

(KR-5200)

BIAS ADJUSTMENT

WHEN USING TESTER AS AMMETER

1. Set pc trimmer potentiometer (VRe1, 2) to its min.
2. Couple tester (as ammeter) to emitter resistor and negative power supply.
(Refer to figure)
3. Adjust potentiometer so that tester reading is 30mA.
4. Check output waveform has not distortion.
5. If not, check main amp unit.

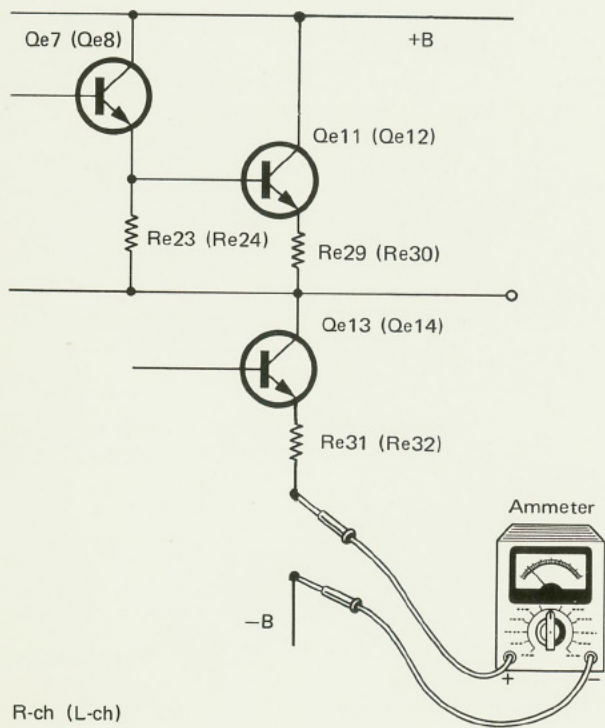

KENWOOD POWER SUPPLY (X00-1170-10) SECTION

(KR-5200)


SCHEMATIC DIAGRAM

BOTTOM VIEW
OF
TRANSISTORS


2SD220



2SC945

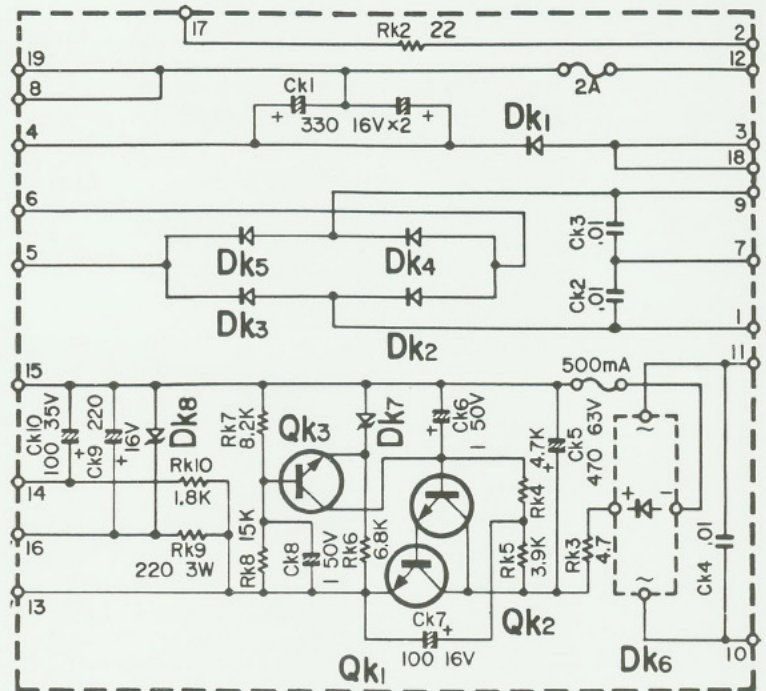

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

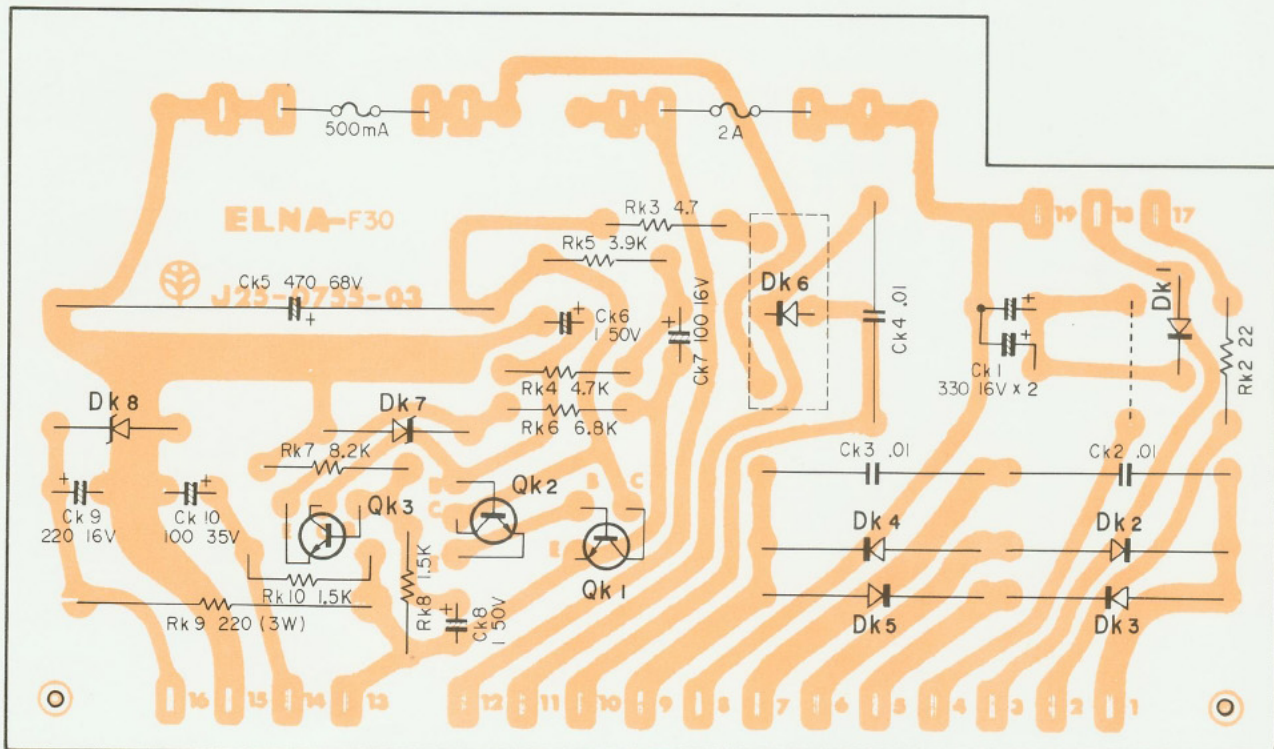

Qk1: 2SD220, Qk2, 3: 2SC945(Q), Dk1: V0-6B, Dk2 ~ 5: U05B, Dk6: S1RB10, Dk7: 1S338(T), Dk8: DZ-140



KENWOOD® POWER SUPPLY(X00-1170-10) SECTION

PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Ck1	CE04W1C331X2	Electrolytic 330 μ F x 2 16WV	
Ck2 ~4	CP02B2J103M	Oil filled 0.01 μ F \pm 20%	
Ck5	CE02W1J471	Electrolytic 470 μ F 63WV	
Ck6	CE04W1H010	Electrolytic 1 μ F 50WV	
Ck7	CE04W1C101	Electrolytic 100 μ F 16WV	
Ck8	CE04W1H010	Electrolytic 1 μ F 50WV	
Ck9	CE04W1C221	Electrolytic 220 μ F 16WV	
Ck10	CE04W1V101	Electrolytic 100 μ F 35WV	
RESISTOR			
Rk2	RC05GF2H220K	Carbon 22 Ω \pm 10% 1/2W	
Rk3	RC05GF2H4R7K	Carbon 4.7 Ω \pm 10% 1/2W	
Rk4	PD14BY2E472J	Carbon 4.7k Ω \pm 5% 1/4W	
Rk5	PD14BY2E392J	Carbon 3.9k Ω \pm 5% 1/4W	
Rk6	PD14BY2E682J	Carbon 6.8k Ω \pm 5% 1/4W	
Rk7	PD14BY2E822J	Carbon 8.2k Ω \pm 5% 1/4W	
Rk8	PD14BY2E153J	Carbon 15k Ω \pm 5% 1/4W	
Rk9	RN14AB3F221J	Metal film 220 Ω \pm 5% 3W	
Rk10	RC05GF2H182K	Carbon 1.8k Ω \pm 10% 1/2W	
SEMICONDUCTOR			
Qk1		2SD220	
Qk2, 3		2SC945 (Q)	
Dk1		V0-6B	
Dk2 ~5		U05B	
Dk6		S1RB10	
Dk7		1S338 (T)	
Dk8		DZ-140	
MISCELLANEOUS			
-	F02-0007-05	Heat sink	
-	F05-5017-05	Fuse (0.5A)	UL
-	F06-2022-05	Fuse (2A)	UL
-	J21-1003-04	Left pc board stopper	
-	J21-1004-04	Right pc board stopper	

SCHEMATIC DIAGRAM

BOTTOM VIEW
OF
TRANSISTORS


2SK19




3SK35



2SC785R

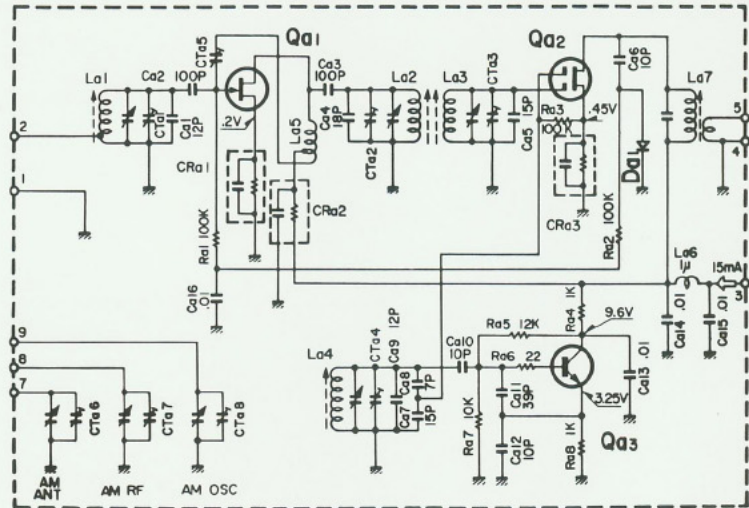

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

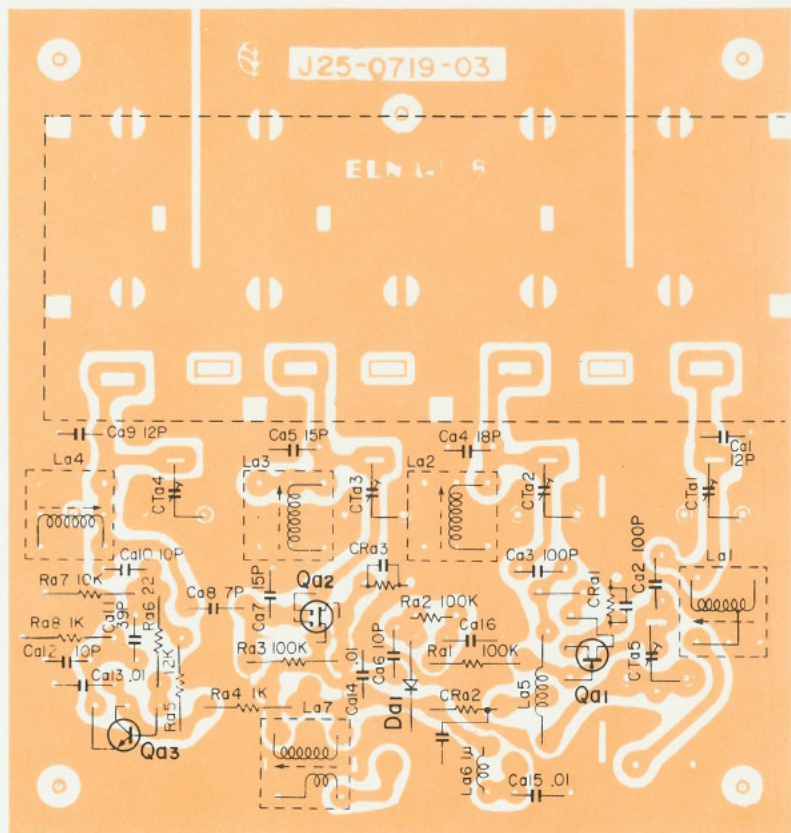

Qa1: 2SK19 (Low noise), Qa2: 3SK35, Qa3: 2SC785R, Da1: 1S1555

PARTS DESCRIPTION LIST


Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Ca1	CC45SH1H120J	Ceramic 12pF ±5%	
Ca2, 3	CC45SL1H101K	Ceramic 100pF ±10%	
Ca4	CC45SH1H180J	Ceramic 18pF ±5%	
Ca5	CC45SH1H150J	Ceramic 15pF ±5%	
Ca6	CC45SL1H100J	Ceramic 10pF ±5%	
Ca7	CC45TH1H150J	Ceramic 15pF ±5%	
Ca8	CC45TH1H070C	Ceramic 7pF ±0.25pF	
Ca9	CC45SG1H120J	Ceramic 12pF ±5%	
Ca10	CC45SG1H100J	Ceramic 10pF ±5%	
Ca11	CC45SG1H390J	Ceramic 39pF ±5%	
Ca12	CC45SG1H100J	Ceramic 10pF ±5%	
Ca13 ~ 16	CK45F1H103Z	Ceramic 0.01μF +80%, -20%	
RESISTOR			
Ra1 ~ 3	PD14BY2B104J	Carbon 100kΩ ±5% 1/8W	
Ra4	PD14BY2B102J	Carbon 1kΩ ±5% 1/8W	
Ra5	PD14BY2B123J	Carbon 12kΩ ±5% 1/8W	
Ra6	PD14BY2B220J	Carbon 22Ω ±5% 1/8W	
Ra7	PD14BY2B103J	Carbon 10kΩ ±5% 1/8W	
SEMICONDUCTOR			
Qa1		2SK19 (Low noise)	
Qa2		3SK35	
Qa3		2SC785R	
Da1		1S1555	
TRANS./COIL			
La1	L34-0301-04	FM-ANT Coil	
La2	L34-0397-05	FM-RF ₁ Coil	
La3	L34-0398-05	FM-RF ₂ Coil	
La4	L34-0399-05	FM-OSC Coil	
La5	L33-0027-05	Choke coil	
La6	L33-0086-05	Choke coil	
La7	L30-0202-05	FM-IFT	
MULTIPLE COMPONENT			
CRa1	R90-0070-05	Ceramic based multiple components (22Ω + 0.01μF)	
CRa2	R90-0071-05	Ceramic based multiple components (220Ω + 0.01μF)	
CRa3	R90-0096-05	Ceramic based multiple components (330Ω + 0.01μF)	
MISCELLANEOUS			
-	A10-0304-03	Front end chassis	
-	A40-0096-04	Front end bottom plate	
VC	C01-0170-05	Variable capacitor	
CTa1 ~ 5	C05-0009-15	Ceramic trimmer	
-	F07-0251-03	Front end cover	
-	F07-0261-04	Front end chassis	
-	F10-0091-04	Front end shield plate	



AM & FM-IF (X02-1020-10) SECTION

(KR-7200) (KR-6200) (KR-5200) (KT-6005)

SCHEMATIC DIAGRAM

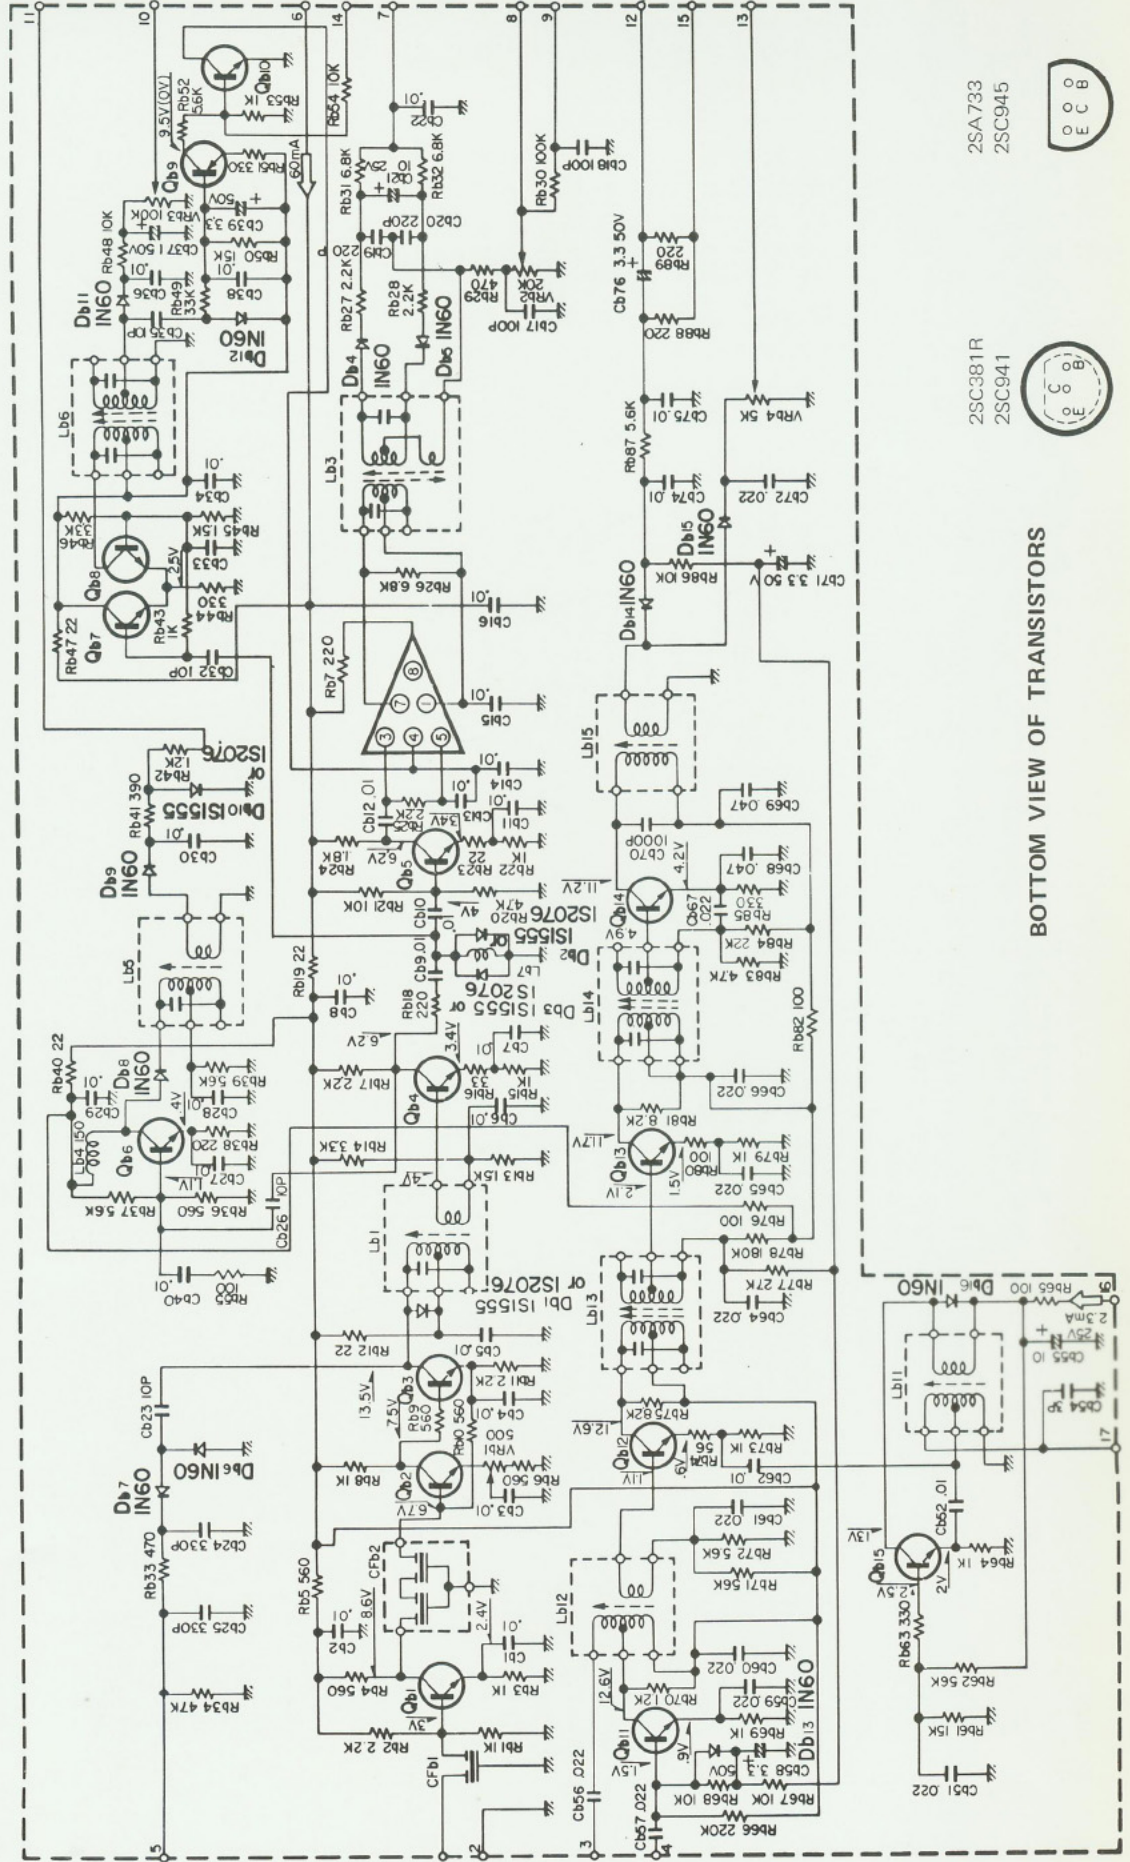


25C381R
25C941


BOTTOM VIEW OF TRANSISTORS

25A733
25C945



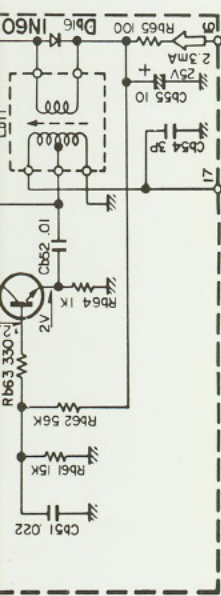

2SA733
2SC945




2SC381R
2SC941



BOTTOM VIEW OF TRANSISTORS

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

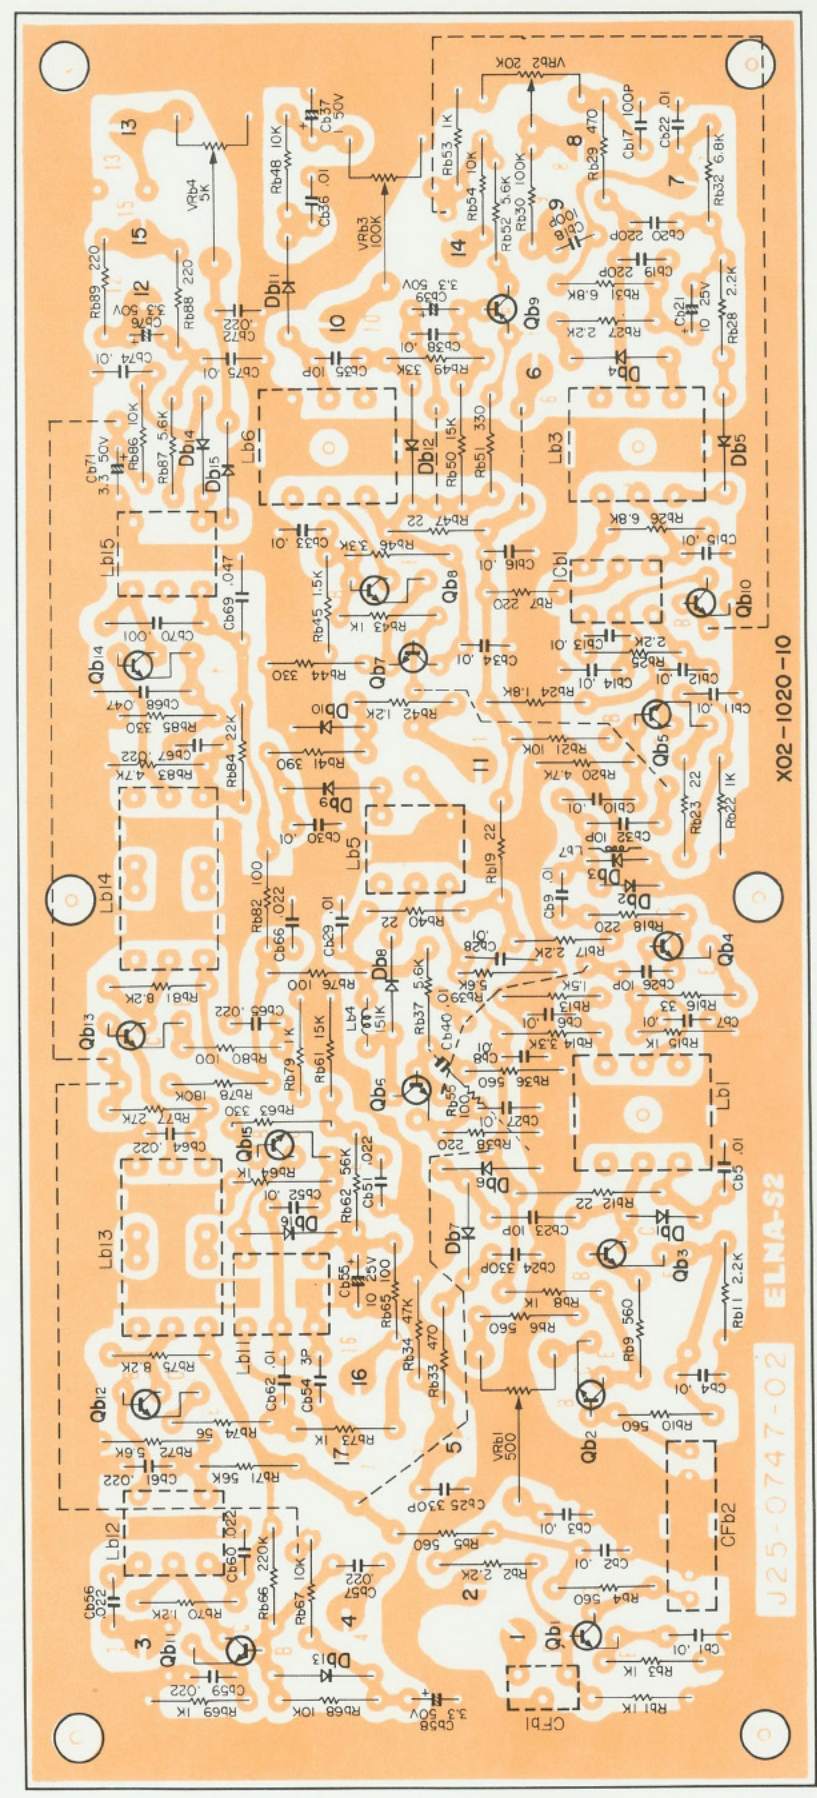

Qb1 ~ 5: 2SC381 (R), Qb6 ~ 8: 2SC381 (R), Qb9: 2SA733 (R), Qb10: 2SC945 (Q) or (R), Qb11, 13: 2SC941 (O), Qb12, 14 15: 2SC941 (R), Db1, 2, 3, 10: 1S1555 or 1S2076, Db4 ~ 9, 11 ~ 16: 1N60, 1Cb1: CS5995 (B)

Case	Dimensions	Electronic	3- μ F	50WV	1/8W
Cb59~61	CK45F1H223Z	Ceramic	0.022 μ F	+80%, -20%	1/8W
Cb62	CO93M1H103K	Mylar	0.01 μ F	\pm 10%	1/8W
Cb64~67	CK45F1H223Z	Ceramic	0.022 μ F	+80%, -20%	1/8W
Cb68, 69	CK45F1H473Z	Ceramic	0.047 μ F	+80%, -20%	1/8W
Cb70	CM93D1H102J(Z)	Mica	1000pF	\pm 5%	1/8W
Cb71	CE04W1H3R3	Electrolytic	3.3 μ F	50WV	1/8W
Cb72	CK45F1H223Z	Ceramic	0.022 μ F	+80%, -20%	1/8W
Cb74, 75	CO93M1H103K	Mylar	0.01 μ F	\pm 10%	1/8W
Cb76	CE04W1H3R3	Electrolytic	3.3 μ F	50WV	1/8W

RESISTOR					
Case	Dimensions	Electronic	3- μ F	50WV	1/8W
Rb1	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb2	PD14BY2B222J	Carbon	2.2k Ω	\pm 5%	1/8W
Rb3	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb4~6	PD14BY2B561J	Carbon	560 Ω	\pm 5%	1/8W
Rb7	PD14BY2B221J	Carbon	220 Ω	\pm 5%	1/8W
Rb8	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb9, 10	PD14BY2B561J	Carbon	560 Ω	\pm 5%	1/8W
Rb11	PD14BY2B222J	Carbon	2.2k Ω	\pm 5%	1/8W
Rb12	PD14BY2B220J	Carbon	22 Ω	\pm 5%	1/8W
Rb13	PD14BY2B152J	Carbon	1.5k Ω	\pm 5%	1/8W
Rb14	PD14BY2B332J	Carbon	3.3k Ω	\pm 5%	1/8W
Rb15	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb16	PD14BY2B330J	Carbon	33 Ω	\pm 5%	1/8W
Rb17	PD14BY2B222J	Carbon	2.2k Ω	\pm 5%	1/8W
Rb18	PD14BY2B221J	Carbon	220 Ω	\pm 5%	1/8W
Rb19	PD14BY2B220J	Carbon	22 Ω	\pm 5%	1/8W
Rb20	PD14BY2B472J	Carbon	4.7k Ω	\pm 5%	1/8W
Rb21	PD14BY2B103J	Carbon	10k Ω	\pm 5%	1/8W
Rb22	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb23	PD14BY2B220J	Carbon	22 Ω	\pm 5%	1/8W
Rb24	PD14BY2B182J	Carbon	1.8k Ω	\pm 5%	1/8W
Rb25	PD14BY2B222J	Carbon	2.2k Ω	\pm 5%	1/8W
Rb26	PD14BY2B682J	Carbon	6.8k Ω	\pm 5%	1/8W
Rb27, 28	PD14BY2B222J	Carbon	2.2k Ω	\pm 5%	1/8W
Rb29	PD14BY2B471J	Carbon	470 Ω	\pm 5%	1/8W
Rb30	PD14BY2B104J	Carbon	100k Ω	\pm 5%	1/8W
Rb31, 32	PD14BY2B682J	Carbon	6.8k Ω	\pm 5%	1/8W
Rb33	PD14BY2B471J	Carbon	470 Ω	\pm 5%	1/8W
Rb34	PD14BY2B473J	Carbon	47k Ω	\pm 5%	1/8W
Rb36	PD14BY2B561J	Carbon	560 Ω	\pm 5%	1/8W
Rb37	PD14BY2B562J	Carbon	5.6k Ω	\pm 5%	1/8W
Rb38	PD14BY2B221J	Carbon	220 Ω	\pm 5%	1/8W
Rb39	PD14BY2B562J	Carbon	5.6k Ω	\pm 5%	1/8W
Rb40	PD14BY2B220J	Carbon	22 Ω	\pm 5%	1/8W
Rb41	PD14BY2B391J	Carbon	390 Ω	\pm 5%	1/8W
Rb42	PD14BY2B122J	Carbon	1.2k Ω	\pm 5%	1/8W

Case	Dimensions	Electronic	3- μ F	50WV	1/8W
Rb75	PD14BY2B822J	Carbon	8.2k Ω	\pm 5%	1/8W
Rb76	PD14BY2B101J	Carbon	100 Ω	\pm 5%	1/8W
Rb77	PD14BY2B273J	Carbon	27k Ω	\pm 5%	1/8W
Rb78	PD14BY2B184J	Carbon	180k Ω	\pm 5%	1/8W
Rb79	PD14BY2B102J	Carbon	1k Ω	\pm 5%	1/8W
Rb80	PD14BY2B101J	Carbon	100 Ω	\pm 5%	1/8W
Rb81	PD14BY2B822J	Carbon	8.2k Ω	\pm 5%	1/8W
Rb82	PD14BY2B101J	Carbon	100 Ω	\pm 5%	1/8W
Rb83	PD14BY2B472J	Carbon	4.7k Ω	\pm 5%	1/8W
Rb84	PD14BY2B223J	Carbon	22k Ω	\pm 5%	1/8W
Rb85	PD14BY2B331J	Carbon	330 Ω	\pm 5%	1/8W
Rb86	PD14BY2B103J	Carbon	10k Ω	\pm 5%	1/8W
Rb87	PD14BY2B562J	Carbon	5.6k Ω	\pm 5%	1/8W
Rb88, 89	PD14BY2B221J	Carbon	220 Ω	\pm 5%	1/8W

SEMICONDUCTOR					
Case	Dimensions	Electronic	3- μ F	50WV	1/8W
Qb1~5	25C381 (O)	25C381 (O)			
Qb6~8	25C381 (R)	25C381 (R)			
Qb9	25A733 (Q) or (R)	25A733 (Q) or (R)			
Qb10	25C945 (Q) or (R)	25C945 (Q) or (R)			
Qb11	25C941 (O)	25C941 (O)			
Qb12	25C941 (R)	25C941 (R)			
Qb13	25C941 (O)	25C941 (O)			
Qb14, 15	25C941 (R)	25C941 (R)			
Db1~3	1S1555 or 1S2076	1S1555 or 1S2076			
Db4~9	1N60	1N60			
Db10	1S1555 or 1S2076	1S1555 or 1S2076			
Db11~16	1N60	1N60			
ICb1	CS5995 (B)	CS5995 (B)			

TRANS./COIL					
Case	Dimensions	Electronic	3- μ F	50WV	1/8W
Lb1	L30-0243-05	FM-IFT			
Lb3	L30-0207-15	DISCRIMINATOR coil			
Lb4	L33-0098-05	Ferri-inductor (150 μ H)			
Lb5	L30-0246-05	Meter coil			
Lb6	L30-0244-05	Trigger coil			
Lb7	L33-0098-05	Ferri-inductor (150 μ H)			
Lb11	L32-0090-05	AM-OSC coil			
Lb12	L31-0111-05	AM-RF coil			
Lb13, 14	L30-0245-05	AM-IFT			
Lb15	L30-0052-05	AM-IFT			

POTENTIOMETER/FILTER					
Case	Dimensions	Electronic	3- μ F	50WV	1/8W
VRb1	R12-0047-05	pc trimmer	500 Ω	(B) BIAS	
VRb2	R12-3014-05	pc trimmer	20k Ω	(B) FM-OUT	
VRb3	R12-5019-05	pc trimmer	100k Ω	(B) BEACON	
VRb4	R12-2016-05	pc trimmer	5k Ω	(B) AM-METER	
CFb1	L72-0010-05	Ceramic filter			
CFb2	L72-0019-05	Ceramic filter			



AM & FM-IF (X02-1020-10) SECTION

PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description	Re- marks
CAPACITOR			
Cb1~3	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb4	CQ93M1H103K	Mylar 0.01 μ F \pm 10%	
Cb5~16	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb17, 18	CC45SL1H101K	Ceramic 100pF \pm 10%	
Cb19, 20	CC45SL1H221K	Ceramic 220pF \pm 10%	
Cb21	CE04W1E100	Electrolytic 10 μ F 25WV	
Cb22	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb23	CC45SL1H100D	Ceramic 10pF \pm 0.5pF	
Cb24, 25	CC45SL1H331K	Ceramic 330pF \pm 10%	
Cb26	CC45SL1H100D	Ceramic 10pF \pm 0.5pF	
Cb27~30	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb32	CC45SL1H100D	Ceramic 10pF \pm 0.5pF	
Cb33, 34	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb35	CC45SL1H100D	Ceramic 10pF \pm 0.5pF	
Cb36	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb37	CE04W1H010	Electrolytic 1 μ F 50WV	
Cb38	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb39	CE04W1H3R3	Electrolytic 3.3 μ F 50WV	
Cb40	CK45F1H103Z	Ceramic 0.01 μ F +80%, -20%	
Cb51	CK45F1H223Z	Ceramic 0.022 μ F +80%, -20%	
Cb52	CQ93M1H103K	Mylar 0.01 μ F \pm 10%	
Cb54	CC45SL1H030C	Ceramic 3pF \pm 0.25pF	
Cb55	CE04W1E100	Electrolytic 10 μ F 25WV	
Cb56, 57	CK45F1H223Z	Ceramic 0.022 μ F +80%, -20%	
Cb58	CE04W1H3R3	Electrolytic 3.3 μ F 50WV	
Cb59~61	CK45F1H223Z	Ceramic 0.022 μ F +80%, -20%	
Cb62	CQ93M1H103K	Mylar 0.01 μ F \pm 10%	
Cb64~67	CK45F1H223Z	Ceramic 0.022 μ F +80%, -20%	
Cb68, 69	CK45F1H473Z	Ceramic 0.047 μ F +80%, -20%	
Cb70	CM93D1H102J(Z)	Mica 1000pF \pm 5%	
Cb71	CE04W1H3R3	Electrolytic 3.3 μ F 50WV	
Cb72	CK45F1H223Z	Ceramic 0.022 μ F +80%, -20%	
Cb74, 75	CQ93M1H103K	Mylar 0.01 μ F \pm 10%	


Ref. No.	Parts No.	Description	Re- marks
Rb43	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb44	PD14BY2B331J	Carbon 330 Ω \pm 5%	1/8W
Rb45	PD14BY2B152J	Carbon 1.5k Ω \pm 5%	1/8W
Rb46	PD14BY2B332J	Carbon 3.3k Ω \pm 5%	1/8W
Rb47	PD14BY2B220J	Carbon 22 Ω \pm 5%	1/8W
Rb48	PD14BY2B103J	Carbon 10k Ω \pm 5%	1/8W
Rb49	PD14BY2B333J	Carbon 33k Ω \pm 5%	1/8W
Rb50	PD14BY2B153J	Carbon 15k Ω \pm 5%	1/8W
Rb51	PD14BY2B331J	Carbon 330 Ω \pm 5%	1/8W
Rb52	PD14BY2B562J	Carbon 5.6k Ω \pm 5%	1/8W
Rb53	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb54	PD14BY2B103J	Carbon 10k Ω \pm 5%	1/8W
Rb55	PD14BY2B101J	Carbon 100 Ω \pm 5%	1/8W
Rb61	PD14BY2B153J	Carbon 15k Ω \pm 5%	1/8W
Rb62	PD14BY2B563J	Carbon 56k Ω \pm 5%	1/8W
Rb63	PD14BY2B331J	Carbon 330 Ω \pm 5%	1/8W
Rb64	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb65	PD14BY2B101J	Carbon 100 Ω \pm 5%	1/8W
Rb66	PD14BY2B224J	Carbon 220k Ω \pm 5%	1/8W
Rb67, 68	PD14BY2B103J	Carbon 10k Ω \pm 5%	1/8W
Rb69	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb70	PD14BY2B122J	Carbon 1.2k Ω \pm 5%	1/8W
Rb71	PD14BY2B563J	Carbon 56k Ω \pm 5%	1/8W
Rb72	PD14BY2B562J	Carbon 5.6k Ω \pm 5%	1/8W
Rb73	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb74	PD14BY2B560J	Carbon 56 Ω \pm 5%	1/8W
Rb75	PD14BY2B822J	Carbon 8.2k Ω \pm 5%	1/8W
Rb76	PD14BY2B101J	Carbon 100 Ω \pm 5%	1/8W
Rb77	PD14BY2B273J	Carbon 27k Ω \pm 5%	1/8W
Rb78	PD14BY2B184J	Carbon 180k Ω \pm 5%	1/8W
Rb79	PD14BY2B102J	Carbon 1k Ω \pm 5%	1/8W
Rb80	PD14BY2B101J	Carbon 100 Ω \pm 5%	1/8W
Rb81	PD14BY2B822J	Carbon 8.2k Ω \pm 5%	1/8W
Rb82	PD14BY2B101J	Carbon 100 Ω \pm 5%	1/8W
Rb83	PD14BY2B472J	Carbon 4.7k Ω \pm 5%	1/8W



MPX (X04-1010-10) SECTION


(KR-7200) (KR-6200) (KR-5200)

SCHEMATIC DIAGRAM

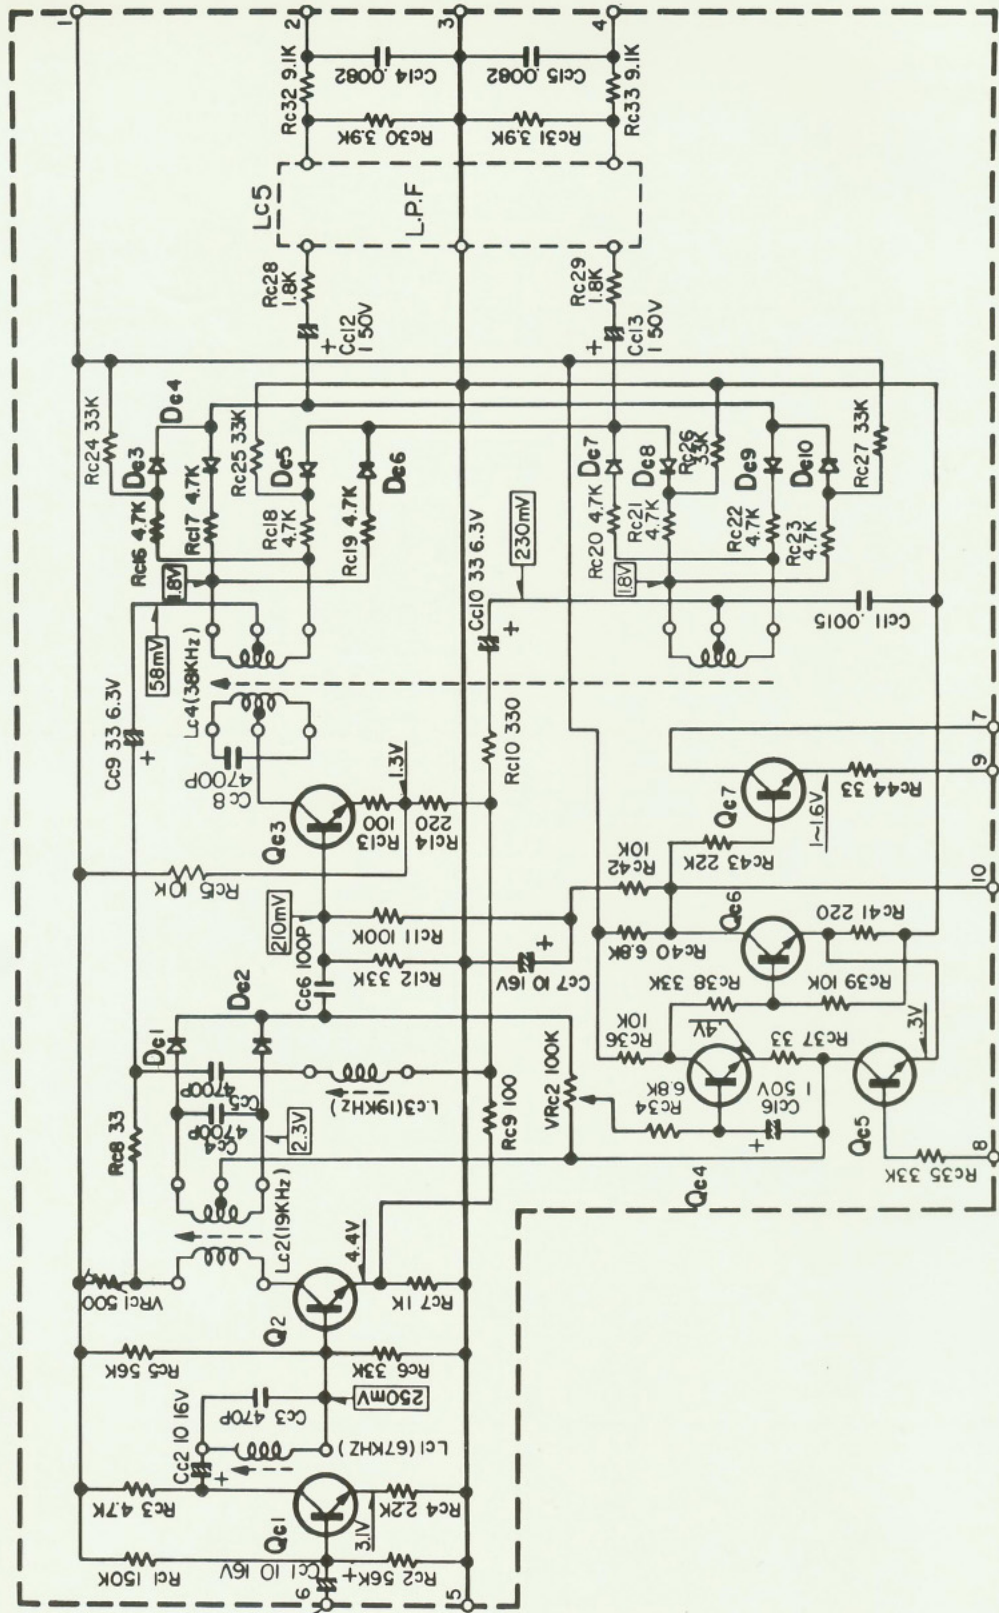

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

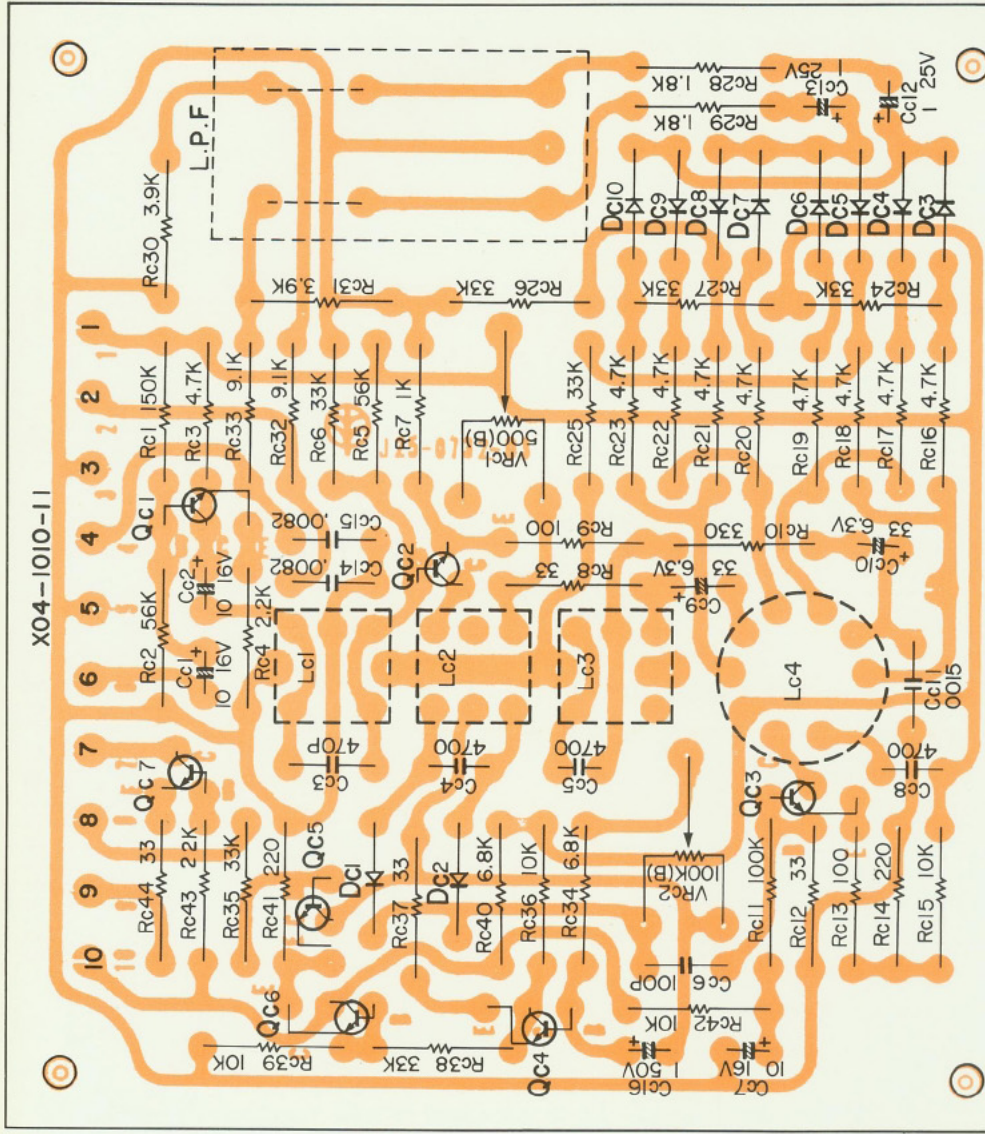

Qc1 ~ 3: 2SC458 (D), Qc4 ~ 7: 2SC945 (Q), Dc1 ~ 10: 1N60

BOTTOM VIEW OF TRANSISTOR



Rc12	PD14BY2E333J	Carbon	33k Ω	$\pm 5\%$	1/4W
Rc13	PD14BY2E101J	Carbon	100 Ω	$\pm 5\%$	1/4W
Rc14	PD14BY2E221J	Carbon	220 Ω	$\pm 5\%$	1/4W
Rc15	PD14BY2E103J	Carbon	10k Ω	$\pm 5\%$	1/4W
Rc16~23	PD14BY2E472J	Carbon	4.7k Ω	$\pm 5\%$	1/4W
Rc24~27	PD14BY2E333J	Carbon	33k Ω	$\pm 5\%$	1/4W
Rc28, 29	PD14BY2E182J	Carbon	1.8k Ω	$\pm 5\%$	1/4W
Rc30, 31	PD14BY2E392J	Carbon	3.9k Ω	$\pm 5\%$	1/4W
Rc32, 33	PD14BY2E912J	Carbon	9.1k Ω	$\pm 5\%$	1/4W
Rc34	PD14BY2E682J	Carbon	6.8k Ω	$\pm 5\%$	1/4W
Rc35	PD14BY2E333J	Carbon	33k Ω	$\pm 5\%$	1/4W
Rc36	PD14BY2E103J	Carbon	10k Ω	$\pm 5\%$	1/4W
Rc37	PD14BY2E330J	Carbon	33 Ω	$\pm 5\%$	1/4W
Rc38	PD14BY2E333J	Carbon	33k Ω	$\pm 5\%$	1/4W
Rc39	PD14BY2E103J	Carbon	10k Ω	$\pm 5\%$	1/4W
Rc40	PD14BY2E682J	Carbon	6.8k Ω	$\pm 5\%$	1/4W
Rc41	PD14BY2E221J	Carbon	220 Ω	$\pm 5\%$	1/4W
Rc42	PD14BY2E103J	Carbon	10k Ω	$\pm 5\%$	1/4W
Rc43	PD14BY2E223J	Carbon	22k Ω	$\pm 5\%$	1/4W
Rc44	PD14BY2E330J	Carbon	33 Ω	$\pm 5\%$	1/4W

SEMICONDUCTOR

Qc1~3	2SC458 (D)				
Qc4~7	2SC945 (Q)				
Dc1~10	1N60				

COIL/FILTER

Lc1	L35-0050-05	MPX coil			
Lc2	L35-0044-05	MPX coil			
Lc3	L35-0054-05	MPX coil			
Lc4	L35-0053-05	MPX coil			
Lc5	L79-0014-05	Low pass filter			

POTENTIOMETER

VRc1	R12-0047-05	pc trimmer 500 Ω (B)	SEPARATION		
VRc2	R12-5019-05	pc trimmer 100k Ω (B)			



MPX (X04-1010-10) SECTION

PARTS DESCRIPTION LIST


Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Cc1, 2	CE04W1C100	Electrolytic 10 μ F 16WV	
Cc3	CO08S2B471J	Polystyrene 470pF \pm 5%	
Cc4, 5	CO09S1H472J(X)	Polystyrene 4700pF \pm 5%	
Cc6	CC45SL1H101K	Ceramic 100pF \pm 10%	
Cc7	CE04W1C100	Electrolytic 10 μ F 16WV	
Cc8	CO09S1H472J(X)	Polystyrene 4700pF \pm 5%	
Cc9, 10	CE04W0J330	Electrolytic 33 μ F 6.3WV	
Cc11	CO93M1H152J	Mylar 0.0015 μ F \pm 5%	
Cc12, 13	CE04W1H010	Electrolytic 1 μ F 50WV	
Cc14, 15	CO93M1H822J	Mylar 0.0082 μ F \pm 5%	
Cc16	CE04W1H010	Electrolytic 1 μ F 50WV	
RESISTOR			
Rc1	PD14BY2E154J	Carbon 150k Ω \pm 5%	1/4W
Rc2	PD14BY2E563J	Carbon 56k Ω \pm 5%	1/4W
Rc3	PD14BY2E472J	Carbon 4.7k Ω \pm 5%	1/4W
Rc4	PD14BY2E222J	Carbon 2.2k Ω \pm 5%	1/4W
Rc5	PD14BY2E563J	Carbon 56k Ω \pm 5%	1/4W
Rc6	PD14BY2E333J	Carbon 33k Ω \pm 5%	1/4W
Rc7	PD14BY2E102J	Carbon 1k Ω \pm 5%	1/4W
Rc8	PD14BY2E330J	Carbon 33 Ω \pm 5%	1/4W
Rc9	PD14BY2E101J	Carbon 100 Ω \pm 5%	1/4W
Rc10	PD14BY2E331J	Carbon 330 Ω \pm 5%	1/4W
Rc11	PD14BY2E104J	Carbon 100k Ω \pm 5%	1/4W
Rc12	PD14BY2E333J	Carbon 33k Ω \pm 5%	1/4W
Rc13	PD14BY2E101J	Carbon 100 Ω \pm 5%	1/4W
Rc14	PD14BY2E221J	Carbon 220 Ω \pm 5%	1/4W
Rc15	PD14BY2E103J	Carbon 10k Ω \pm 5%	1/4W
Rc16 ~ 23	PD14BY2E472J	Carbon 4.7k Ω \pm 5%	1/4W
Rc24 ~ 27	PD14BY2E333J	Carbon 33k Ω \pm 5%	1/4W
Rc28, 29	PD14BY2E182J	Carbon 1.8k Ω \pm 5%	1/4W
Rc30, 31	PD14BY2E392J	Carbon 3.9k Ω \pm 5%	1/4W
Rc32, 33	PD14BY2E912J	Carbon 9.1k Ω \pm 5%	1/4W
Rc34	PD14BY2E682J	Carbon 6.8k Ω \pm 5%	1/4W
Rc35	PD14BY2E333J	Carbon 33k Ω \pm 5%	1/4W




MAIN AMP (X07-1100-00) SECTION

(KR-5200)

SCHEMATIC DIAGRAM

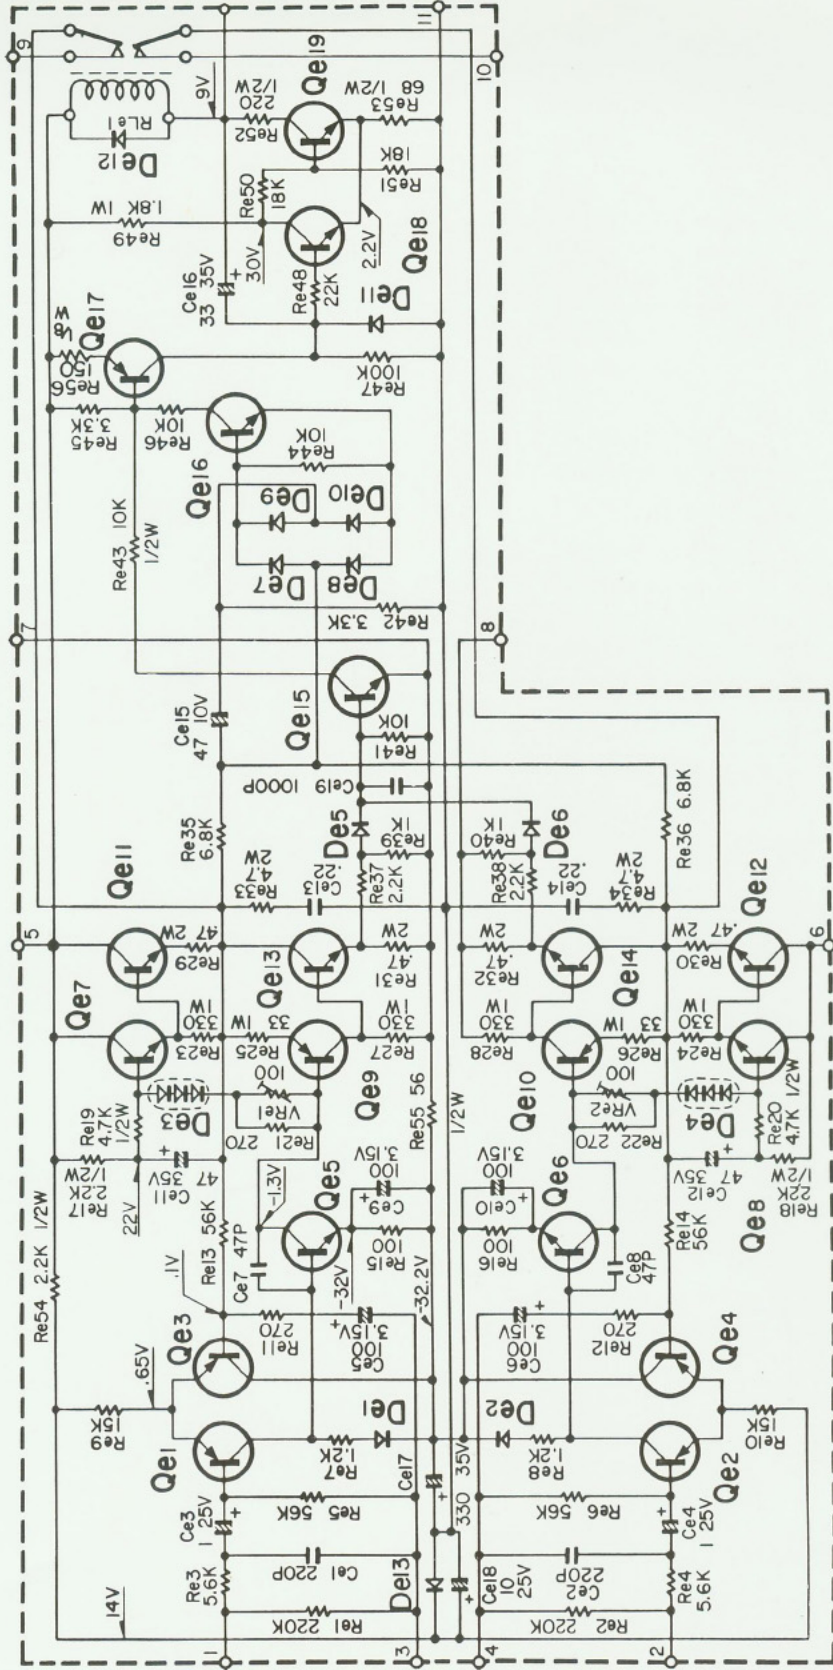

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

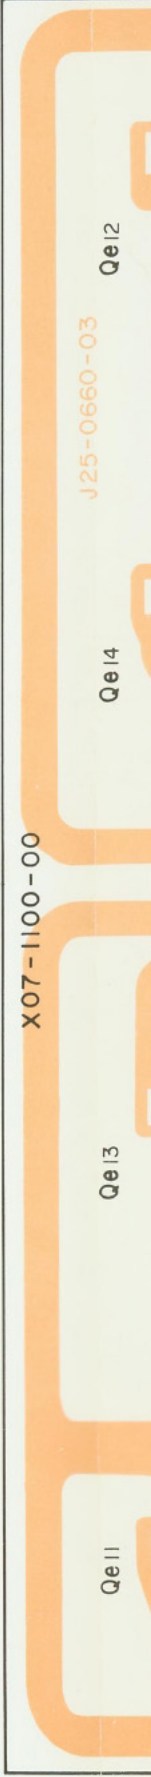

Re23, 24	RN14AB3A331K	Metal film	330Ω	±10%	1W
Re25, 26	RN14AB3A330K	Metal film	33Ω	±10%	1W
Re27, 28	RN14AB3A331K	Metal film	330Ω	±10%	1W
Re29 ~ 31	RN14AB3D4R7K	Metal film	0.47Ω	±10%	2W
Re33, 34	RN14AB3D4R7K	Metal film	4.7Ω	±10%	2W
Re35, 36	PD14BY2E682J	Carbon	6.8kΩ	±5%	1/4W
Re37, 38	PD14BY2E222J	Carbon	2.2kΩ	±5%	1/4W
Re39, 40	PD14BY2E102J	Carbon	1kΩ	±5%	1/4W
Re41	PD14BY2E103J	Carbon	10kΩ	±5%	1/4W
Re42	PD14CY2E332J	Carbon	3.3kΩ	±5%	1/4W
Re43	RC05GF2H103K	Carbon	10kΩ	±10%	1/2W
Re44	PD14BY2E103J	Carbon	10kΩ	±5%	1/4W
Re45	PD14BY2E332J	Carbon	33kΩ	±5%	1/4W
Re46	PD14BY2E103J	Carbon	10kΩ	±5%	1/4W
Re47	PD14BY2E104J	Carbon	100kΩ	±5%	1/4W
Re48	PD14BY2E223J	Carbon	22kΩ	±5%	1/4W
Re49	RN14AB3A182K	Metal film	1.8kΩ	±10%	1W
Re50, 51	PD14BY2E183J	Carbon	18kΩ	±5%	1/4W
Re52	RC05GF2H221K	Carbon	220Ω	±10%	1/2W
Re53	RC05GF2H680K	Carbon	68Ω	±10%	1/2W
Re54	RC05GF2H222K	Carbon	2.2kΩ	±10%	1/2W
Re55	RC05GF2H560K	Carbon	56Ω	±10%	1/2W
Re56	PD14BY2B151J	Carbon	150Ω	±5%	1/8W

SEMICONDUCTOR

Qe1 ~ 4	2SA620WL4	2SA620WL4			
Qe5, 6		2SC983 (O) or (Y)			
Qe7, 8		2SC1212A (B) or (C)			
Qe9, 10		2SA743A (B) or (C)			
Qe11 ~ 14		2SC1111			
Qe15		2SC983R			
Qe16		2SC1213A (B) or (C)			
Qe17		2SA673A (B) or (C)			
Qe18, 19		2SC1213A (B) or (C)			
De1, 2		1S1555 or 1S2076			
De3, 4		STV-3			
De5 ~ 10		1S1555 or 1S2076			
De11, 12		VO-6B			
De13		YZ-140			

POTENTIOMETER/RELAY

VRe1, 2	R12-0052-05	Pc trimmer	100Ω (B) BIAS		
Rel1	SS1-2019-05	Relay (LY2-US)			UL

MISCELLANEOUS

-	E02-0207-05	Transistor socket			
-	F01-0107-13	Heat sink			
-	J19-0101-04	Varistor holder			



MAIN AMP (X07-1100-00) SECTION

PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
Ce1, 2	CC45SL1H221K	Ceramic 220pF ±10%	
Ce3, 4	CS04E1E010X or M	Tantalum 1μF 25WV	
Ce5, 6	CE04W0F101	Electrolytic 100μF 3.15WV	
Ce7, 8	CC45SL1H470K	Ceramic 47pF ±10%	
Ce9, 10	CE04W0F101	Electrolytic 100μF 3.15WV	
Ce11, 12	CE04W1V470	Electrolytic 47μF 35WV	
Ce13, 14	CO93M1H224M	Mylar 0.22μF ±20%	
Ce15	CE04W1A470(NP)	Electrolytic 47μF 10WV	
Ce16	CE04W1V330M	Electrolytic 33μF 35WV	
Ce17	CE04W1V331	Electrolytic 330μF 35WV	
Ce18	CE04W1E100	Electrolytic 10μF 25WV	
Ce19	CK45D1H102M	Ceramic 0.001μF ±20%	
RESISTOR			
Re1, 2	PD14BY2E224J	Carbon 220kΩ ±5%	1/4W
Re3, 4	PD14BY2E562J	Carbon 5.6kΩ ±5%	1/4W
Re5, 6	PD14BY2E563J	Carbon 56kΩ ±5%	1/4W
Re7, 8	PD14BY2E122J	Carbon 1.2kΩ ±5%	1/4W
Re9, 10	PD14BY2E153J	Carbon 15kΩ ±5%	1/4W
Re11, 12	PD14BY2E271J	Carbon 270Ω ±5%	1/4W
Re13, 14	PD14BY2E563J	Carbon 56kΩ ±5%	1/4W
Re15, 16	PD14BY2E101J	Carbon 100Ω ±5%	1/4W
Re17, 18	RC05GF2H222K	Carbon 2.2kΩ ±10%	1/2W
Re19, 20	RC05GF2H472K	Carbon 4.7kΩ ±10%	1/2W
Re21, 22	PD14BY2E271J	Carbon 270Ω ±5%	1/4W
Re23, 24	RN14AB3A331K	Metal film 330Ω ±10%	1W
Re25, 26	RN14AB3A330K	Metal film 33Ω ±10%	1W
Re27, 28	RN14AB3A331K	Metal film 330Ω ±10%	1W
Re29 ~ 31	RN14AB3DR47K	Metal film 0.47Ω ±10%	2W
Re33, 34	RN14AB3D4R7K	Metal film 4.7Ω ±10%	2W
Re35, 36	PD14BY2E682J	Carbon 6.8kΩ ±5%	1/4W
Re37, 38	PD14BY2E222J	Carbon 2.2kΩ ±5%	1/4W
Re39, 40	PD14BY2E102J	Carbon 1kΩ ±5%	1/4W


SCHEMATIC DIAGRAM

**BOTTOM VIEW
OF
TRANSISTORS**


2SC620WL



2SC1416

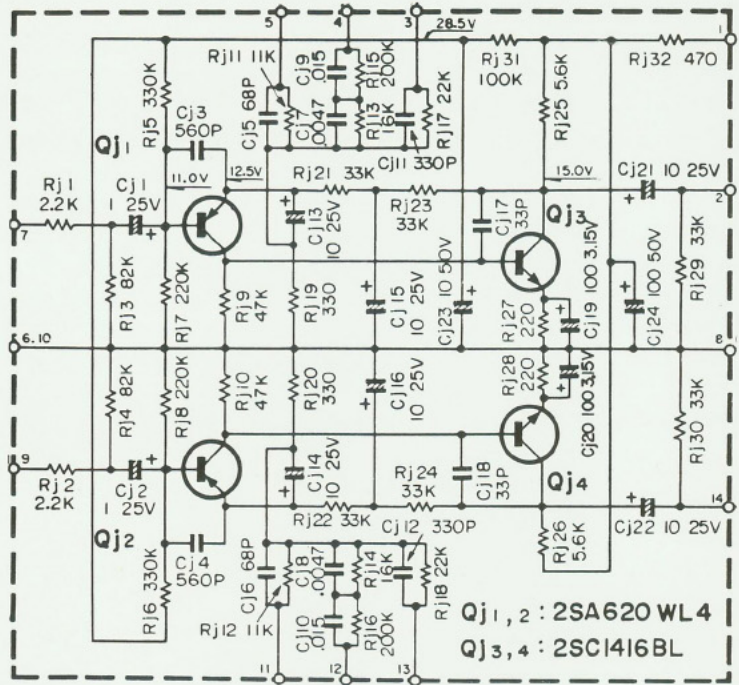

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

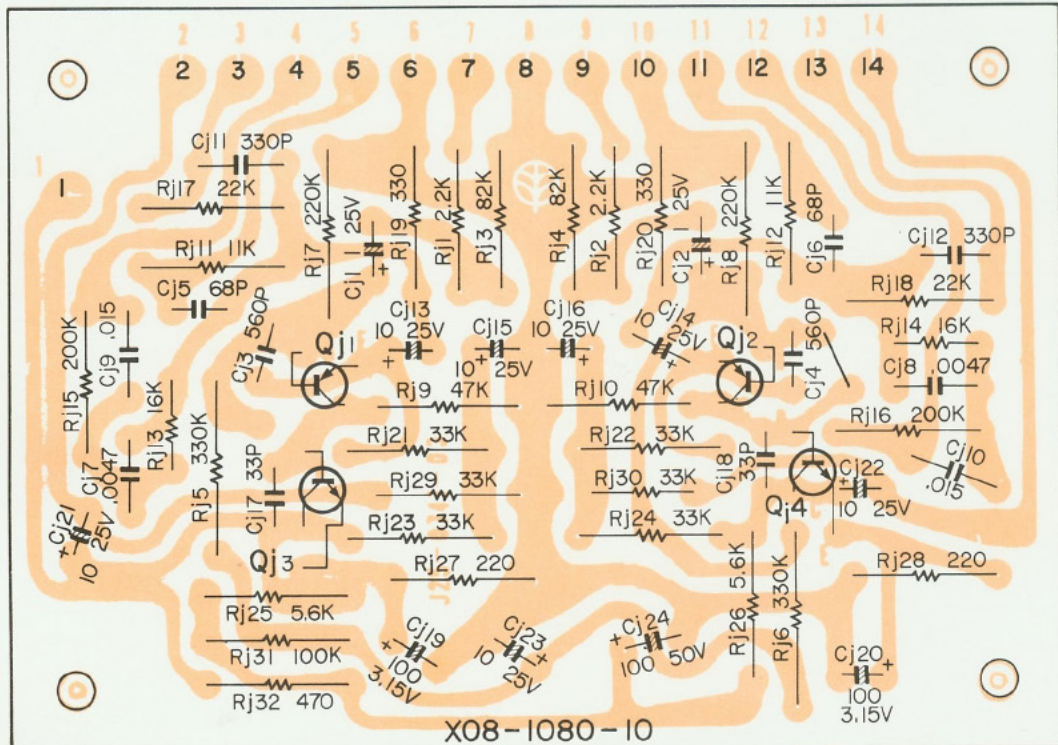

Qj1, 2: 2SA620WL4, Qj3, 4: 2SC1416 BL




PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description			Remarks
CAPACITOR					
Cj1, 2	CS04E1E010M	Tantalum	1 μ F	25WV	
Cj3, 4	CK45D1H561M	Ceramic	560pF	\pm 20%	
Cj5, 6	CC45SL1H680K	Ceramic	68pF	\pm 10%	
Cj7, 8	CQ93M1H472J	Mylar	0.0047 μ F	\pm 5%	
Cj9, 10	CQ93M1H153J	Mylar	0.015 μ F	\pm 5%	
Cj11, 12	CK45D1H331M	Ceramic	330pF	\pm 20%	
Cj13 ~ 16	CE04W1E100	Electrolytic	10 μ F	25WV	
Cj17, 18	CC45SL1H330K	Ceramic	33pF	\pm 10%	
Cj19, 20	CE04W0F101	Electrolytic	100 μ F	3.15WV	
Cj21, 22	CE04W1E100	Electrolytic	10 μ F	25WV	
Cj23	CE04W1H100	Electrolytic	10 μ F	50WV	
Cj24	CE04W1H101	Electrolytic	100 μ F	50WV	
RESISTOR					
Rj1, 2	PD14BY2E222J	Carbon	2.2k Ω	\pm 5%	1/4W
Rj3, 4	PD14BY2E823J	Carbon	82k Ω	\pm 5%	1/4W
Rj5, 6	RN92A2H334J	Metal film	330k Ω	\pm 5%	1/2W
Rj7, 8	RN92A2H224J	Metal film	220k Ω	\pm 5%	1/2W
Rj9, 10	PD14BY2E473J	Carbon	47k Ω	\pm 5%	1/4W
Rj11, 12	PD14BY2E113J	Carbon	11k Ω	\pm 5%	1/4W
Rj13, 14	RN92A2E163G	Metal film	16k Ω	\pm 1%	1/4W
Rj15, 16	PD14BY2E204J	Carbon	200k Ω	\pm 5%	1/4W
Rj17, 18	PD14BY2E223J	Carbon	22k Ω	\pm 5%	1/4W
Rj19, 20	PD14BY2E331J	Carbon	330 Ω	\pm 5%	1/4W
Rj21 ~ 24	PD14BY2E333J	Carbon	33k Ω	\pm 5%	1/4W
Rj25, 26	PD14BY2E562J	Carbon	5.6k Ω	\pm 5%	1/4W
Rj27, 28	PD14BY2E221J	Carbon	220 Ω	\pm 5%	1/4W
Rj29, 30	PD14BY2E333J	Carbon	33k Ω	\pm 5%	1/4W
Rj31	PD14BY2E104J	Carbon	100k Ω	\pm 5%	1/4W
Rj32	PD14BY2E471J	Carbon	470 Ω	\pm 5%	1/4W
SEMICONDUCTOR					
Qj1, 2		2SA620WL4			
Qj3, 4		2SC1416BL			


SCHEMATIC DIAGRAM

BOTTOM VIEW
OF
TRANSISTOR

2SC1000

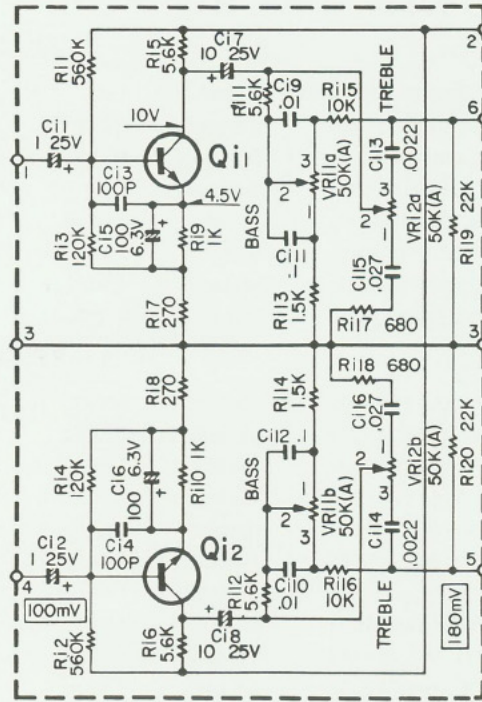

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

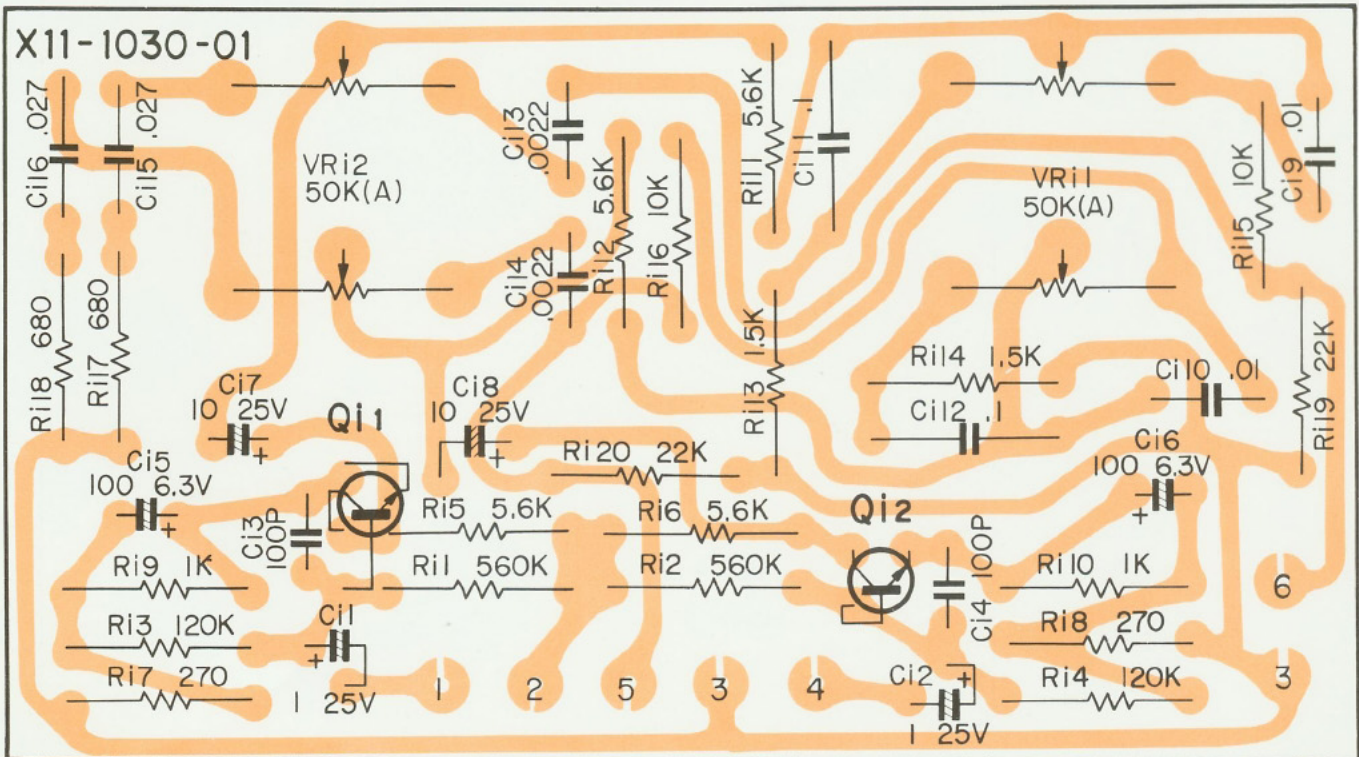



Qi1, 2: 2SC1000BL

**KENWOOD****TONE AMP (X11-1030-01) SECTION**


PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description	Remarks
CAPACITOR			
CI1, 2	CS04E1E010X or M	Tantalum 1 μ F 25WV	
CI3, 4	CC45SL1H101K	Ceramic 100pF \pm 10%	
CI5, 6	CE04W0J101	Electrolytic 100 μ F 6.3WV	
CI7, 8	CE04W1E100	Electrolytic 10 μ F 25WV	
CI9, 10	CQ93M1H103K	Mylar 0.01 μ F \pm 10%	
CI11, 12	CQ93M1H104K	Mylar 0.1 μ F \pm 10%	
CI13, 14	CQ93M1H222K	Mylar 0.0022 μ F \pm 10%	
CI15, 16	CQ93M1H273K	Mylar 0.027 μ F \pm 10%	
RESISTOR			
RI1, 2	PD14BY2E564J	Carbon 560k Ω \pm 5% 1/4W	
RI3, 4	PD14BY2E124J	Carbon 120k Ω \pm 5% 1/4W	
RI5, 6	PD14BY2E562J	Carbon 5.6k Ω \pm 5% 1/4W	
RI7, 8	PD14BY2E271J	Carbon 270 Ω \pm 5% 1/4W	
RI9, 10	PD14BY2E102J	Carbon 1k Ω \pm 5% 1/4W	
RI11, 12	PD14BY2E562J	Carbon 5.6k Ω \pm 5% 1/4W	
RI13, 14	PD14BY2E152J	Carbon 1.5k Ω \pm 5% 1/4W	
RI15, 16	PD14BY2E103J	Carbon 10k Ω \pm 5% 1/4W	
RI17, 18	PD14BY2E681J	Carbon 680 Ω \pm 5% 1/4W	
RI19, 20	PD14BY2E223J	Carbon 22k Ω \pm 5% 1/4W	
SEMICONDUCTOR			
QI1, 2		2SC1000BL	
POTENTIOMETER			
VRi1	R08-4054-05	Potentiometer 50k Ω (A) dual BASS	
VRi2	R08-4054-05	Potentiometer 50k Ω (A) dual TREBLE	

SCHEMATIC DIAGRAM

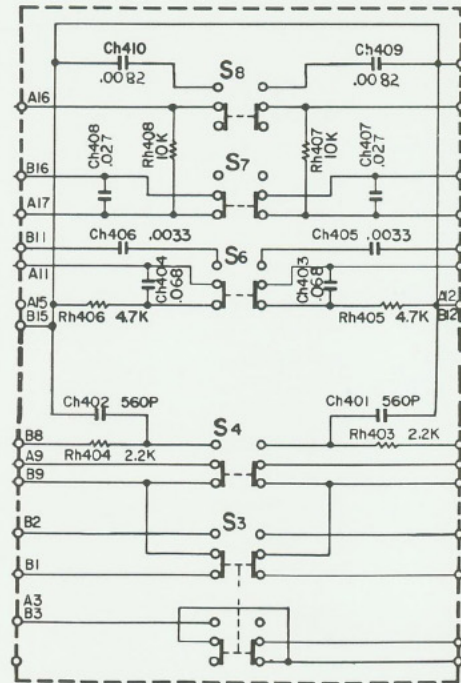

SEALED CIRCUIT ASSEMBLIES-PHANTOM VIEWS

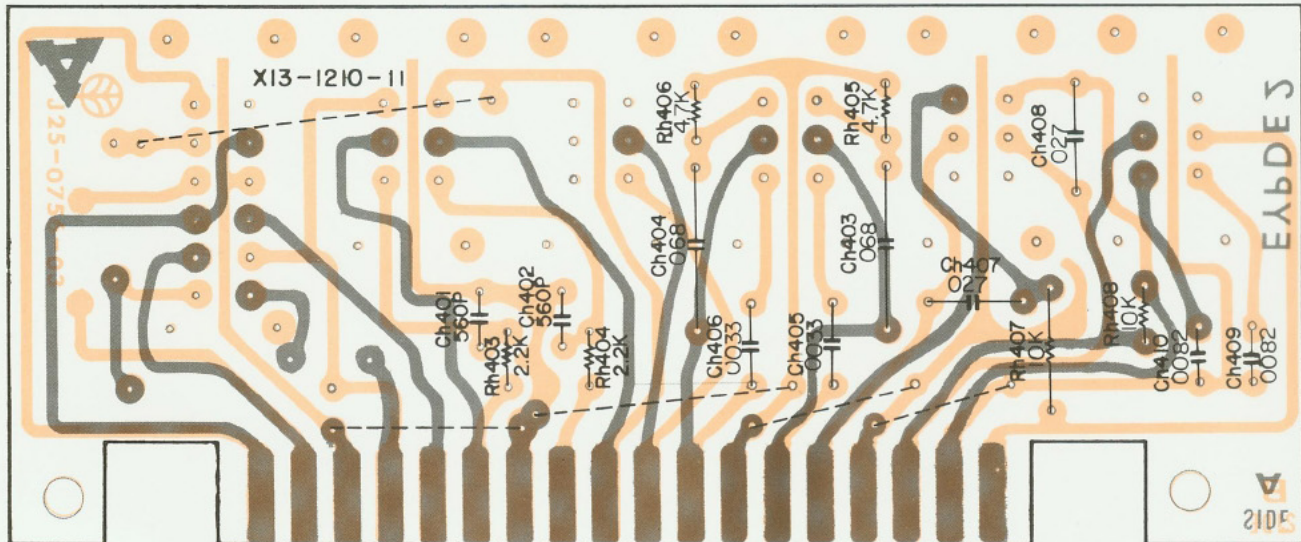

**KENWOOD®****PUSH SWITCH (X13-1210-11) SECTION**

PARTS DESCRIPTION LIST

Ref. No.	Parts No.	Description			Remarks
CAPACITOR					
Ch401, 402	CK45D1H561M	Ceramic	560pF	±20%	
Ch403, 404	CQ93M1H683K	Mylar	0.068 μ F	±10%	
Ch405, 406	CQ93M1H332K	Mylar	0.0033 μ F	±10%	
Ch407, 408	CQ93M1H273K	Mylar	0.027 μ F	±10%	
Ch409, 410	CQ93M1H822K	Mylar	0.0082 μ F	±10%	
RESISTOR					
Rh403, 404	PD14BY2E222J	Carbon	2.2k Ω	±5%	1/4W
Rh405, 406	PD14BY2E472J	Carbon	4.7k Ω	±5%	1/4W
Rh407, 408	PD14BY2E103J	Carbon	10k Ω	±5%	1/4W
SWITCH					
S3	S40-6006-05	Six pushbutton (TAPE-A)			
S4	S40-6006-05	Six pushbutton (TAPE-B)			
S5	S40-6006-05	Six pushbutton (FM MUTING)			
S6	S40-6006-05	Six pushbutton (LOUDNESS)			
S7	S40-6006-05	Six pushbutton (LO-FIL)			
S8	S40-6006-05	Six pushbutton (HI-FIL)			

KENWOOD ELECTRONICS, INC.

- 15777 SOUTH BROADWAY, GARDENA, CALIFORNIA 90248
- 72-02 51ST AVENUE, WOODSIDE. N.Y. 11377

CANADIAN EXCLUSIVE DISTRIBUTOR

MAGNASONIC CANADA LTD.

- 4980 BUCHAN ST. MONTREAL P.Q, CANADA
- 14 BANIGAN DRIVE THORNCLIFFE PARK TORONTO CANADA