

SERVICE MANUAL

INTEGRATED STEREO AMPLIFIER

SANSUI AU-217



SPECIFICATIONS

Power output

Min. RMS, both channels driven, from 20 to 20,000 Hz,
with no more than 0.06% total harmonic distortion
30 watts per channel into 8 ohms

Load impedance 8 ohms

Power bandwidth 20 to 20,000 Hz at or below
rated min. RMS power output
and total harmonic distortion

Total harmonic distortion less than 0.06% at or below
rated min. RMS power output

Intermodulation distortion (70 Hz: 7 kHz = 4:1 SMPTE
method) less than 0.06%

Frequency response (at 1 watt) 10 to 50,000 Hz +0.5 dB -1.5 dB

Damping factor approximately 80 at 8 ohms
load

RIAA curve deviation (PHONO)

. +0.5 dB - 0.5 dB
(30 to 15,000 Hz)

Input sensitivity and impedance (1 kHz, for rated power
output)

PHONO 2.5 mV/47 kilohms

(Max. input capability; 180 mV at 1 kHz, less than
0.05% total harmonic distortion)

AUX, TAPE 150 mV/47 kilohms

Output level (1,000 Hz)

TAPE REC (pin jack) 150 mV

Channel separation (1 kHz, at rated power output)

PHONO better than 65 dB

AUX better than 68 dB

Hum and noise (short-circuit A-network)

PHONO 76 dB

AUX 94 dB

Controls

BASS ±12 dB (50 Hz)

TREBLE ±11 dB (15 kHz)

PHONO SUBSONIC -3 dB (13 Hz), 6 dB/oct

HIGH FILTER -3 dB (7 kHz), 6 dB/oct

LOUDNESS (-30 dB)

. 8 dB at 50 Hz
6 dB at 10 kHz

Power requirements

Power voltage 100, 120, 220, 240V (50/60 Hz)
120V (Usable 110 - 130V)
60 Hz (for U.S.A. for Canada
only)

Power consumption

Maximum consumption 280 watts

Rated consumption 145 watts 180 VA


Dimensions 430 mm (16-15/16") W

110 mm (4-3/8") H

340 mm (13-3/8") D

Weight 8.6 kg (19.0 lbs) net

9.8 kg (21.6 lbs) packed

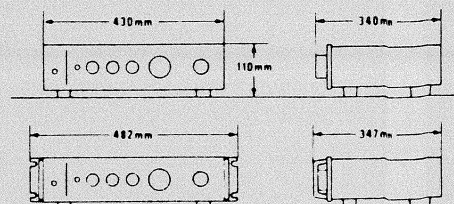


* Design and specifications subject to changes without
notice for improvements.

Sansui


SANSUI ELECTRIC CO., LTD.

1. BLOCK DIAGRAM

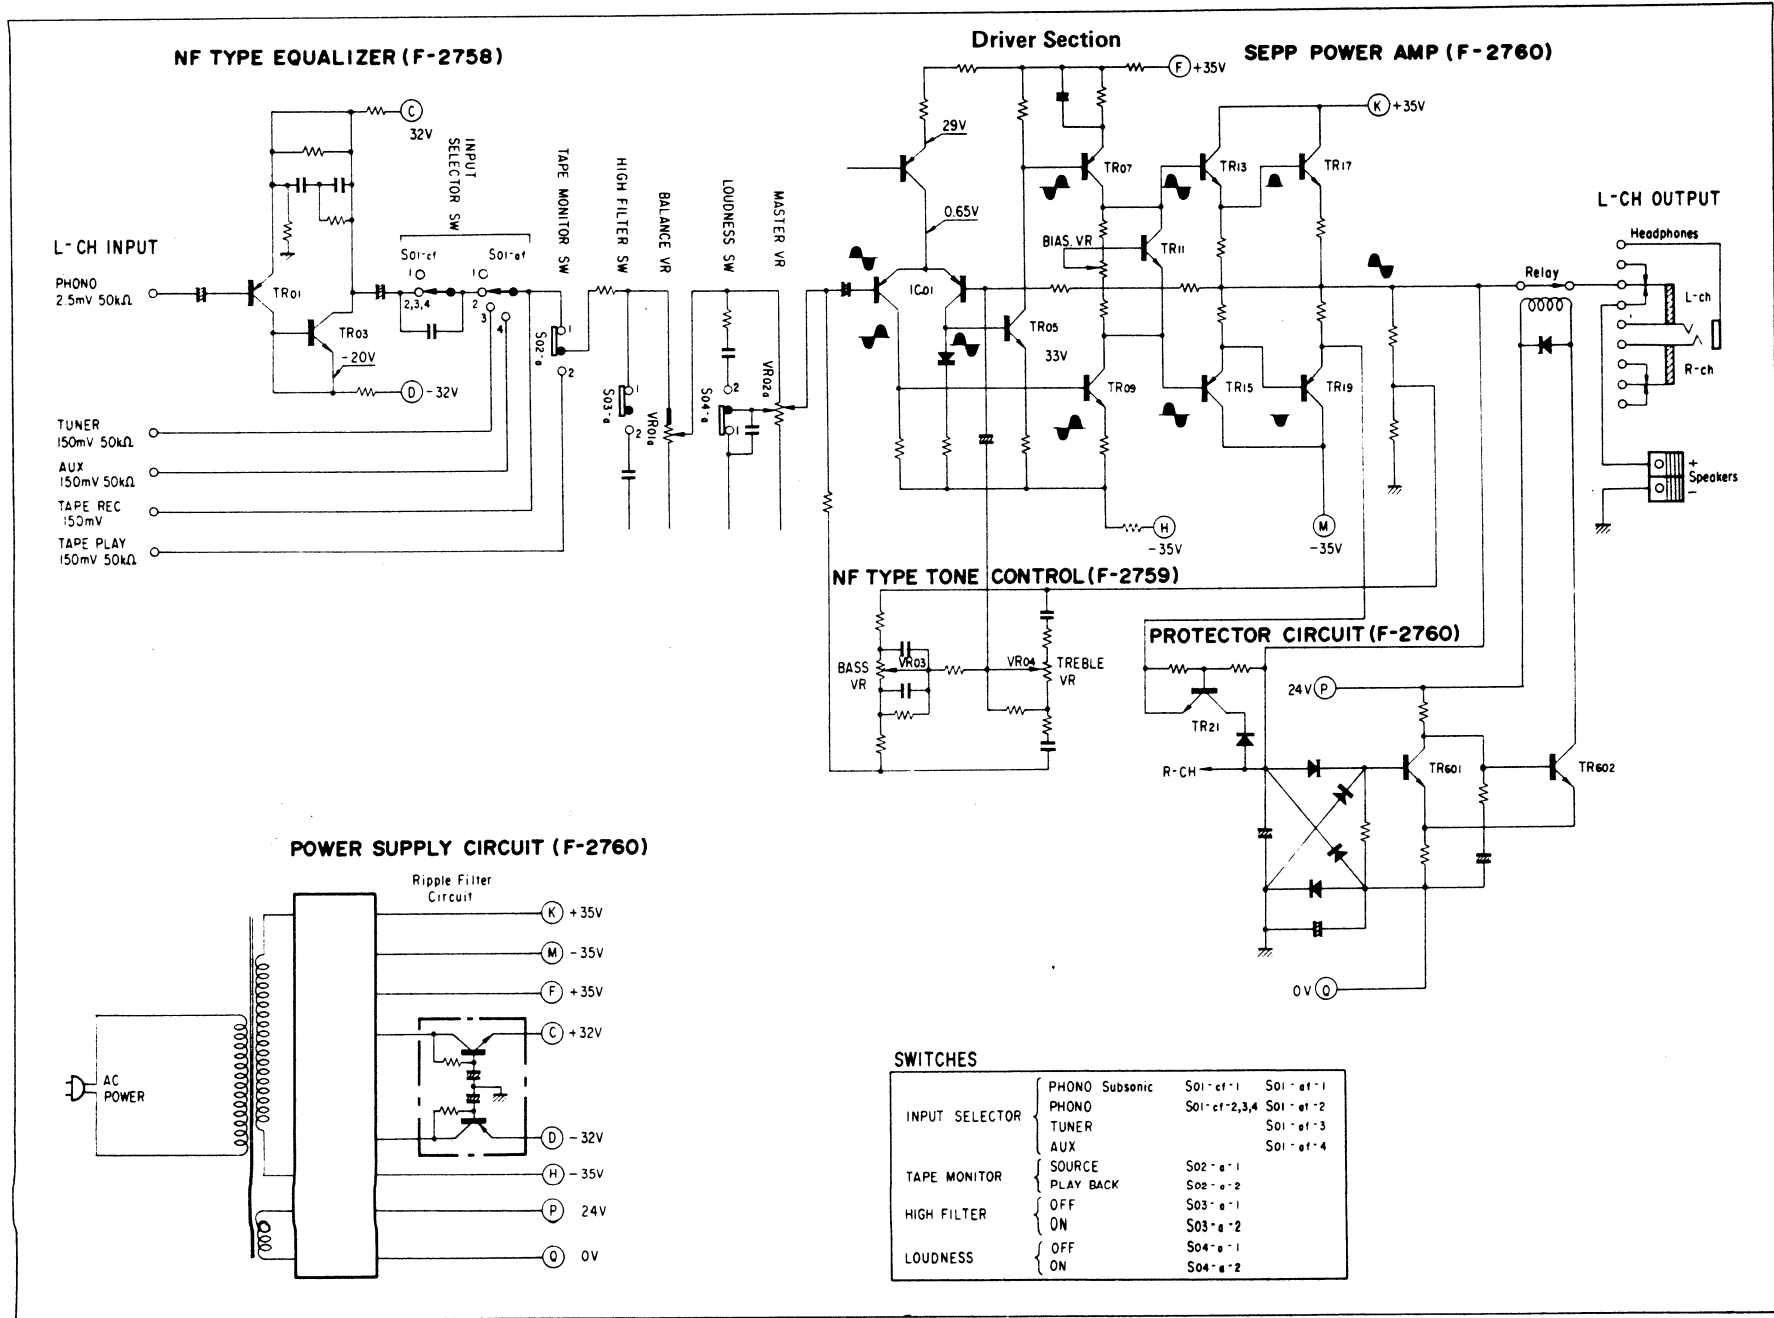

2. OPERATION OF DRIVER SECTION

Fig. 2-1 Driver Section

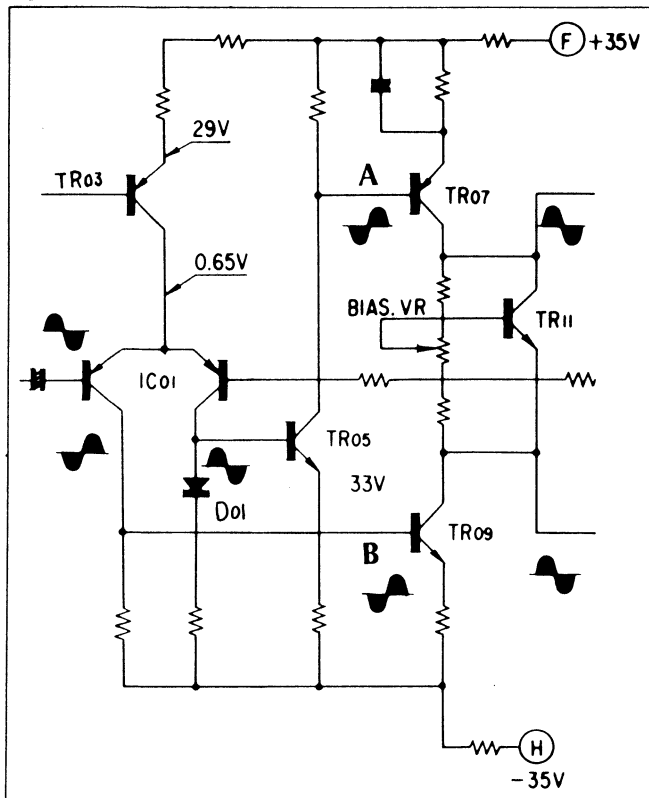

◆ The first stage on driver section employs a differential amplifier circuit, therefore one of two output signals from IC01 on the driver section is supplied to base of TR05 and the other is added to base of TR09.


The input phase of the current mirror circuit including TR05 and D01 is inverted by TR05 and its inverted signal is added to base of TR07. Since the input signals, A & B, as Fig. 2-1, of TR07 and TR09 are in same level and inphase, the function of this section is complete push-pull operation by which even harmonic distortion is extremely decreased.

3. ADJUSTMENT

1) Bias Current Adjustment (See the Picture of Top View on page 7)

Note:

1. Confirm the AC Power Supply voltage.
2. Master Volume Minimum
3. Room Temperature 18° C ~ 28° C
(65° F ~ 83° F)
4. For this adjustment, run the unit for more than 3 minutes after power is switched ON.
5. Before this adjustment, turn VR01 and VR02 fully counterclockwise.

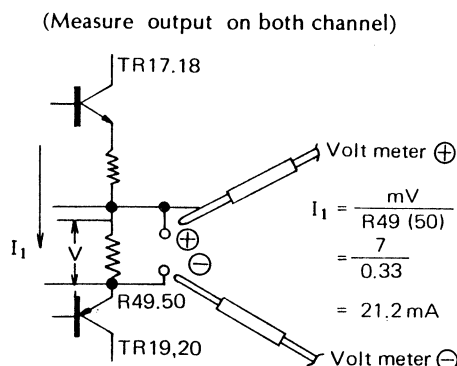

(L-CH....R49 and R-CH....R50)


(L-CH....TR17, TR19 and R-CH....TR18, TR 20)

STEP	SUBJECT	EQUIPMENT	MEASURE OUTPUT	ADJUST	ADJUST FOR
1	Bias Current L-CH	DC Volt Meter	TP Terminal (+)(-) of F-2760	F-2760 VR01	DC 7mV $\pm 0.5\text{mV}$
2	Bias Current R-CH	DC Volt Meter	TP Terminal (+)(-) of F-2760	F-2760 VR02	DC 7mV $\pm 0.5\text{mV}$

4. PARTS LOCATION & PARTS LIST

1) F-2757 Input Terminal Circuit Board (Stock No. 7595461)

Conductor Side

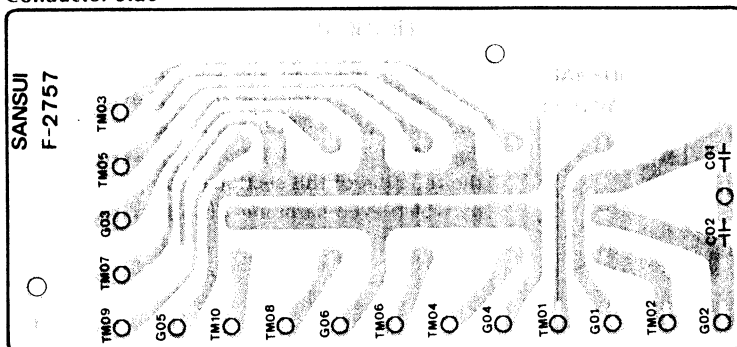


Parts List

Parts No.	Stock No.	Description
C 01, 02	0657473 2200510	47000 pF 50V C.C. 10P Input Terminal

2) F-2758 Equalizer Circuit Board (Stock No. 7551191)

Conductor Side

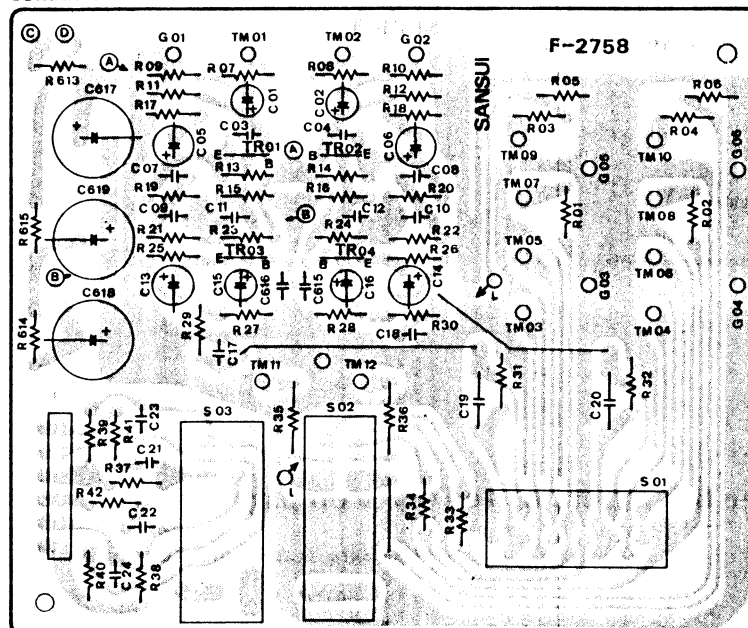


Parts List

Parts No.	Stock No.	Description
TR01, 02	0300920, 1	2SA726 F.G. Transistor
TR03, 04	0306070, 1	2SC1313 F.G. Transistor
C 17, 18	0620621	620 pF 50V P.C.
C 21, 22	0620391	390 pF 50V P.C.
S 01	1102740	Rotary Switch, input selector
S 02	1171050	Lever Switch, tape monitor
S 03	1171020	Lever Switch, high filter

3) F-2759 Tone Control Circuit Board (Stock No. 7561971)

Conductor Side

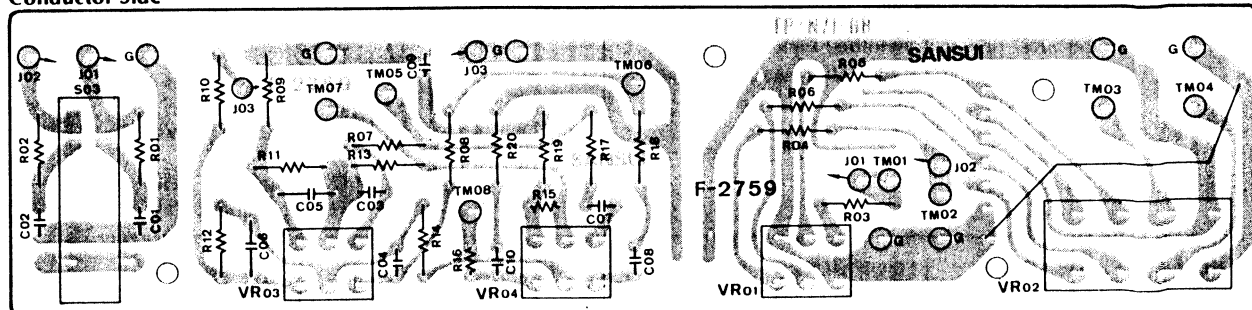

Parts List


Parts No.	Stock No.	Description
VR01	1015270, 1	250 kΩ (M, N) x 2 Balance Volume
VR02	1011120, 1	250 kΩ (A) x 2 Main Volume

Parts No.	Stock No.	Description
VR03, 04	1015260, 1	100 kΩ (C) x 2 Bass, Treble Volume

Parts No.	Stock No.	Description
S 04	1171020	Lever Switch, loudness

4) F-2760 Power Amplifier Circuit Board (Stock No. 7571791)

Conductor Side

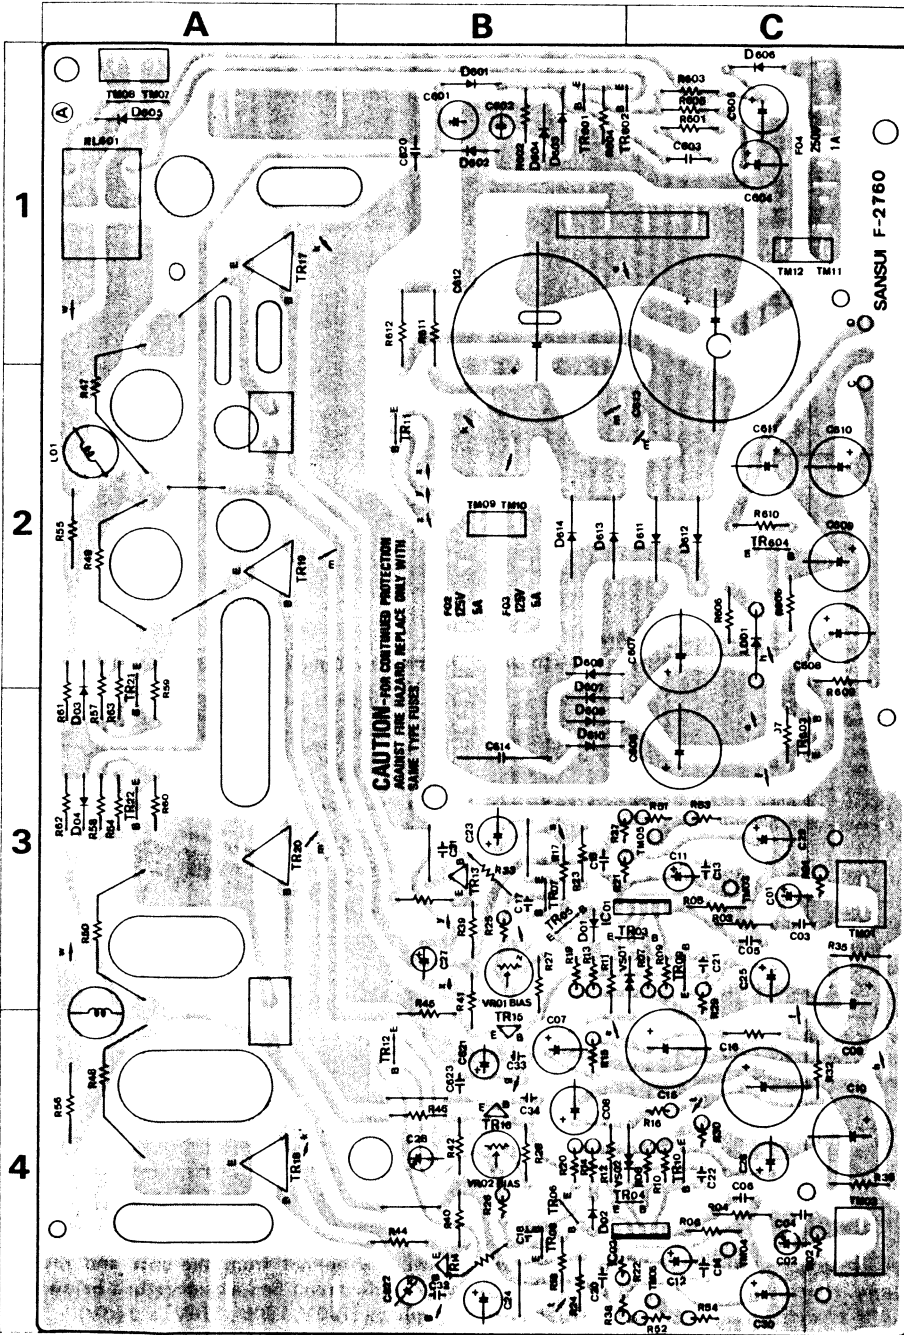


Parts List

Parts No.	Stock No.	Description
TR03, 04	0300470, 1	2SA726 (W) F.G.
TR05, 06	0306270, 1	2SC1708 F.G.
TR07, 08	0300890, 1	2SA750 (3) E.U.
TR09, 10	0306290, 1	2SC1400 (1) E.U.
TR11, 12	0305731	2SC711 E
TR13, 14	0308481, 2	2SD358 D.E.
TR15, 16	0303311, 2	2SB528 D.E.
TR17, 18	0308541, 2	2SD188A R.O.
TR19, 20	0303381, 2	2SB545A R.O.
TR21, 22	0305731, 2	2SC711 E.F.
TR601, 602	0306131, 2	2SC1364 6.7
TR603	0308520, 1	2SD438 D.E.
TR604	0303360, 1	2SB560 D.E.
IC 01, 02	0360290, 1	2SA798 IC
D 01 ~ 04	0311160	1S2473D
D 601 ~ 604	0310400	1N34A
D 605 ~ 610	0310340	10D1
D 611 ~ 614	0311530	30D2
VS01, 02	0340120	VD1212 Varistor
C 05, 06	0621101	100 pF 50V P.C.
C 612, 613	0549111	6800 μF 50V E.C.
C 614	0603227	0.022 μF 125V M.C.
R 31, 32	0210820	82Ω ½W N.I.R.
R 35, 36	0210820	82Ω ½W N.I.R.
R 39 ~ 42	0191221	220Ω ½W F.R.
R 43 ~ 46	0191689	68Ω ½W F.R.
R 47 ~ 50	0132338	0.33Ω 2W C.R.
R 51, 52	0231302	3 kΩ ½W M.R.
R 53, 54	0231271	270Ω ½W M.H.
R 55, 56	0103479	4.7Ω ½W C.R.
R 606	0211222	2.2 kΩ 1W N.I.R.
R 609, 610	0210101	100Ω ½W N.I.R.
R 611, 612	0103562	5.6 kΩ ½W C.R.
L 01, 02	4210290	RF Coil 1.5 μH
RL601	1150400	Relay
VH01, 02	1035050	470Ω B Bias Volume
F 02, 03	0432290	5A 125V AC Fuse
F 04	0432220	1A 250V AC Fuse
	2030050	Transistor Socket
	2310220	Fuse Holder (Large)
	2410650	2P Pin Ass'y TYPE D
	2410910	2P Pin Ass'y TYPE E
	2410650	2P Pin Ass'y TYPE D

5) F-2755 Output Connection Circuit Board (Stock No. 7595471)

Conductor Side

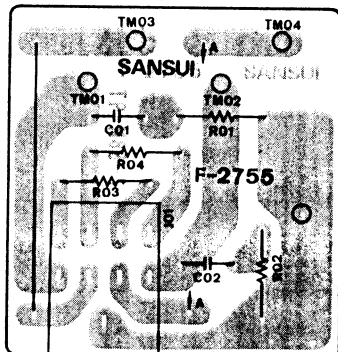


Parts List

Parts No.	Stock No.	Description
R 01, 02	0103100	10Ω ½W C.R.
R 03, 04	0211221	220Ω 1W N.I.R.
J 01	2430350	Jack, headphone

6) F-2731 Voltage Selector Circuit Board (Stock No. 7595481)

Conductor Side

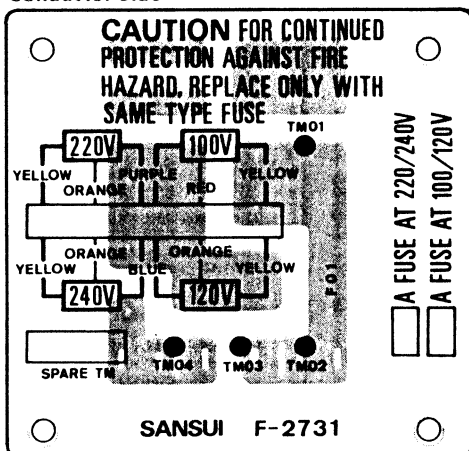


Parts List

Parts No.	Stock No.	Description
F 01	0432260	3A 250V AC Fuse
	2310220	Fuse Holder (Large)

● Figures

Connectors & Pin Ass'y

Connectors

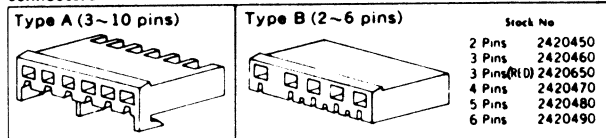


NOTE: Since stock number of female connectors (type B) with wires are not shown in each parts list of Complete circuit board, please refer to the above parts list when ordering the connector.

Abbreviations

C.R. : Carbon Resistor	E.C. : Electrolytic Capacitor
S.R. : Solid Resistor	BP.E.C. : Bi-Polar Electrolytic Capacitor
Ce.R. : Cement Resistor	C.C. : Ceramic Capacitor
M.R. : Metal Film Resistor	MI.C. : Mica Capacitor
F.R. : Fusing Resistor	O.C. : Oil Capacitor
N.I.R. : Non-Inflammable Resistor	P.C. : Polystyrene Capacitor
M.C. : Mylar Capacitor	T.C. : Tantalum Capacitor

Pin Ass'y

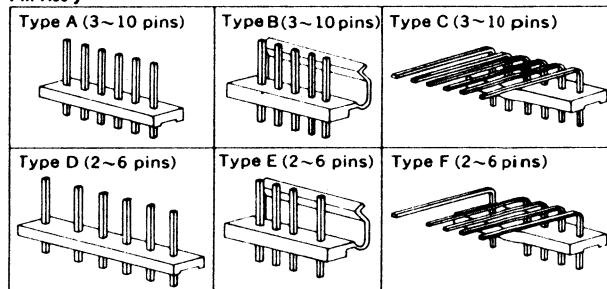


NOTE:

◇ Changing Power Supply Voltage:


Your unit is adjusted to operate at the correct power supply voltage of your area prior to shipment from our factory. If you move to an outside country after purchasing it or send it as a gift to a friend living in an area where the voltage is different, it may be necessary to operate at the correct power supply voltage.

◇ When necessary, remove the bonnet from the unit and re-connect leads from power supply circuit board as described below according to the required voltage (100V, 120V, 220V or 240V).


1) For 100V




2) For 120V




3) For 220V



4) For 240V




e

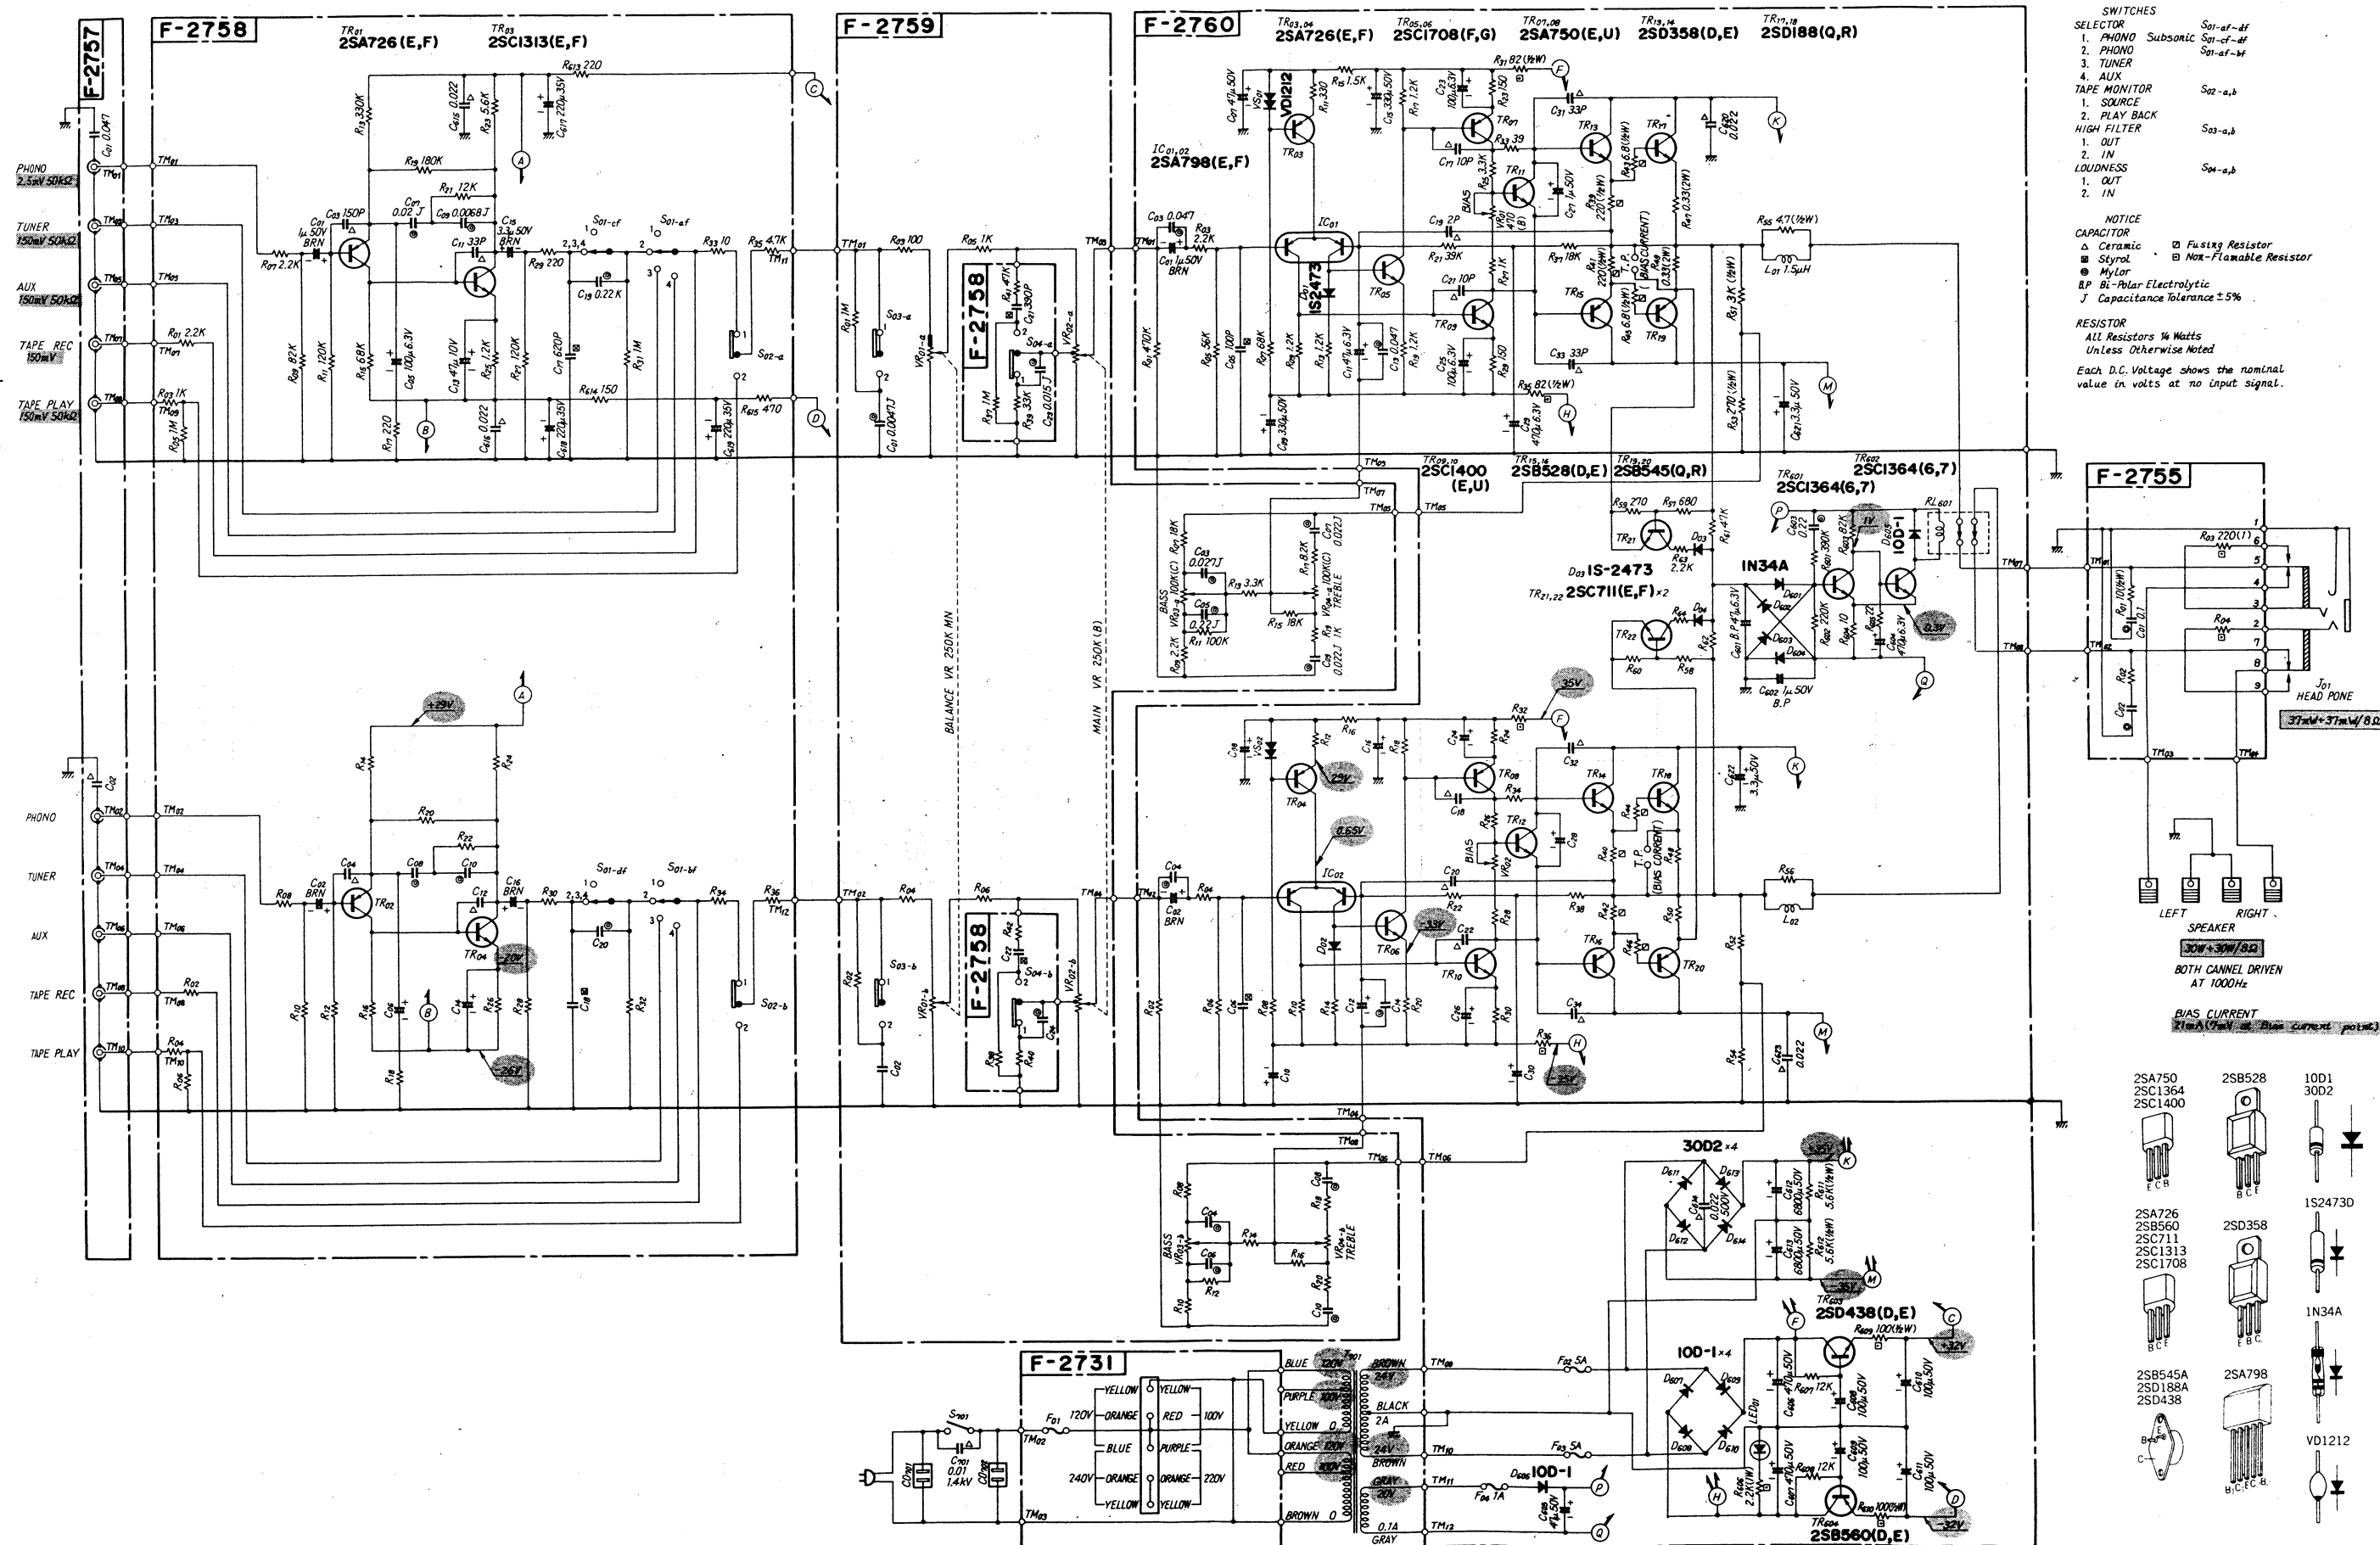


6. OTHER PARTS

Front View

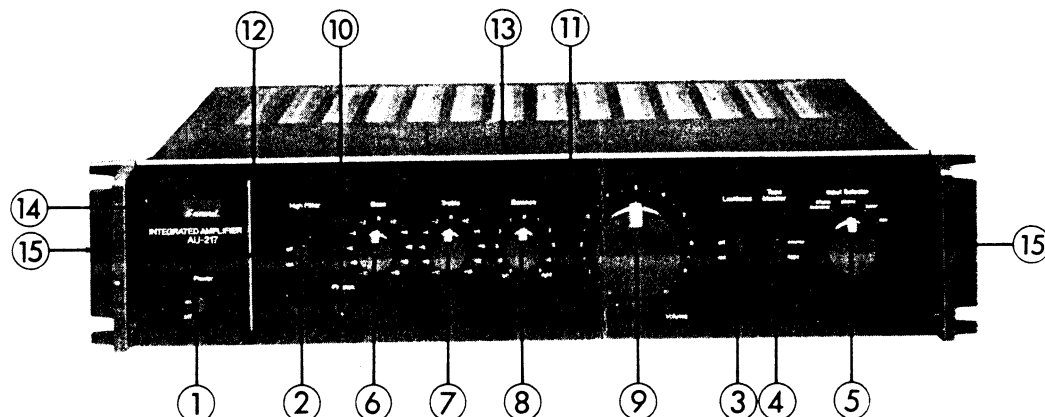

Top View

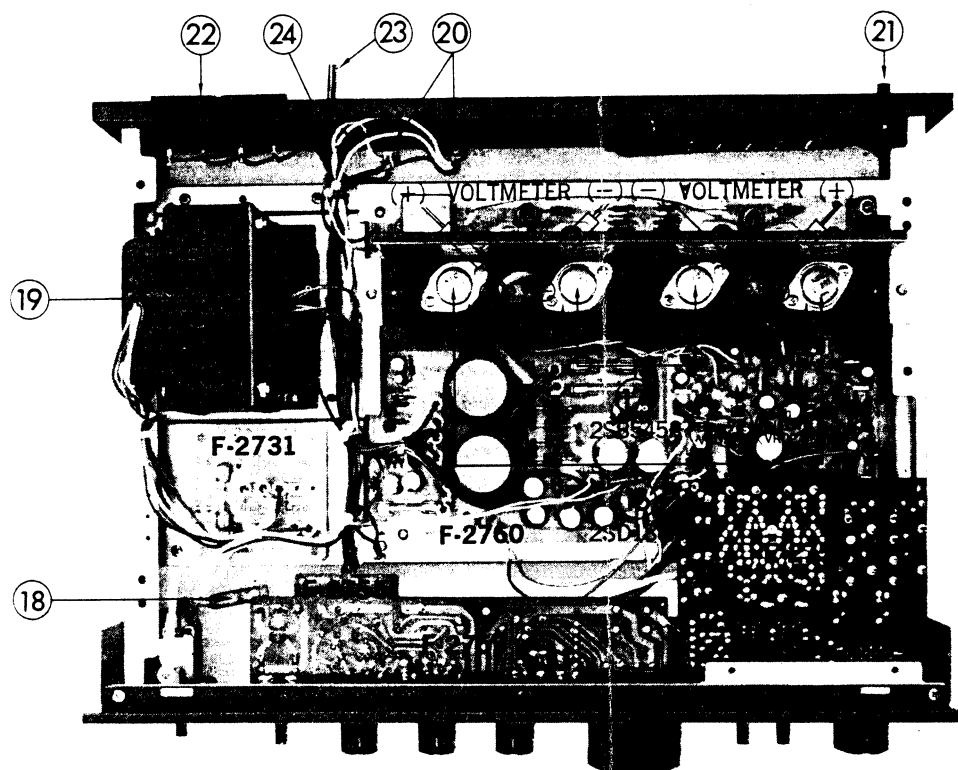

Parts List


Parts No.	Stock No.	Description
1	5326611	Lever Switch Knob, power
	1171643	Lever Switch, power
2	5326611	Lever Switch Knob, high filter
	1171020	Lever Switch, high filter
3	6326611	Lever Switch Knob, loudness
	1171020	Lever Switch, loudness
4	5326611	Lever Switch Knob, tape monitor
	1171050	Lever Switch, tape monitor
5	5318920	M-10 TY Knob, input selector
	1102740	Rotary Switch, input selector
	5048040	Masking Sheet (B)
6	5318930	S-14 TY Knob, bass volume
	1015260, 1	100kΩ (C) x 2 Bass Volume
	5048020	Masking Sheet (D)
	5289230	Plate (M7), volume
7	5318930	S-14 TY Knob, treble volume
	1015260, 1	100kΩ (C) x 2 Treble Volume

Parts No.	Stock No.	Description
	5048020	Masking Sheet (D)
	5289230	Plate (M7), volume
8	5318930	S-14 TY Knob, balance volume
	1015270, 1	250kΩ (MN) x 2 Balance Volume
	5048020	Masking Sheet (D)
	5289230	Plate (M7), volume
9	5318910	Volume Knob
	1011120, 1	250kΩ x 2 Volume
	5048050	Masking Sheet (A)
	5289960	Plate (M8), volume
10	2430350	Head Phone Jack
11	7007670	Front Panel Ass'y
12	0319120	LED
13	5006690	Bonnet
14	5336680	Sansui Mark
15	5396350	Lock-mount Adaptor (each)
16	0308541, 2	2SD188A (R, Q) Transistor

Parts No.	Stock No.	Description
17	0303381, 2	2SB545A (R, Q) Transistor
18	0659801	0.01μF 150V C.C.
19	4002680	Power Transformer
20	2450060	AC Outlet
	5626172	AC Outlet Insulation Sheet
21	2230150	Ground Terminal
22	2290190	Speaker Terminal
23	3800010	Power cord
	3800014	Power cord
24	3910600	Strain Relief (5.2φ)
	5058770	Bottom Plate
	5507070	Leg
	5109928	B TYPE Screw M4 x 18 (Black)
	5109929	W TYPE Screw M4 x 8
	5120561	P TYPE Washer M4 x 0.8 (Black)
	5288721	Plate, TR11, TR12 on F-2760

7. PACKING LIST

Parts No.	Stock No.	Description
1	9116153	Vinyl Cover (Small)
2	9028080	Stylofoam Packing
3	9009780	Carton Case
4	5996080	Curli Stopper

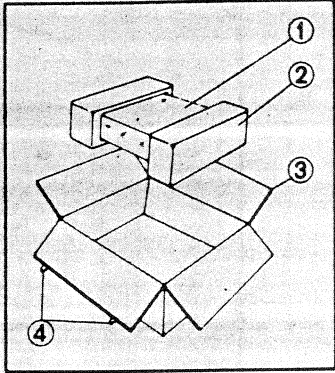

8. ACCESSORY PARTS LIST

Parts No.	Stock No.	Description
	9203120	Operating Instructions
	9237610	Schematic Diagram
	5396350	Rack-mounting Adaptor (each)
	9116730	Vinyl Bag For Rack-mount-Adaptor
	5192082	Hexagon Wrench (1.5 mm)
	9116580	Vinyl Bag For Wrench

MEMO



SANSUI ELECTRONICS CORPORATION: 55-11 Queens Blvd, Woodside, N.Y. 11377 U.S.A.
333 West Alondra Blvd, Gardena, California 90247 U.S.A.
3036 Koapaka St. Honolulu, Hawaii 96819 U.S.A.
SANSUI AUDIO EUROPE N.V.: North Trade Bldg (9th floor) Noorderlaan 133-Bus 1, 2030 Antwerp, Belgium
SANSUI AUDIO EUROPE S.A.: Arabella center, 6 Frankfurt AM Main, Lyoner Strasse 44-48, West Germany
SANSUI ELECTRIC COMPANY LTD.: 14-1, Izumi 2-chome, Suginamiku, Tokyo 168 Japan PHONE: (03) 323-1111/TELEX:232-2076