

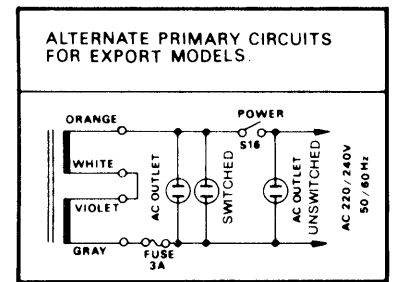


SHERWOOD
MODEL S-9910
AM/FM STEREO RECEIVER

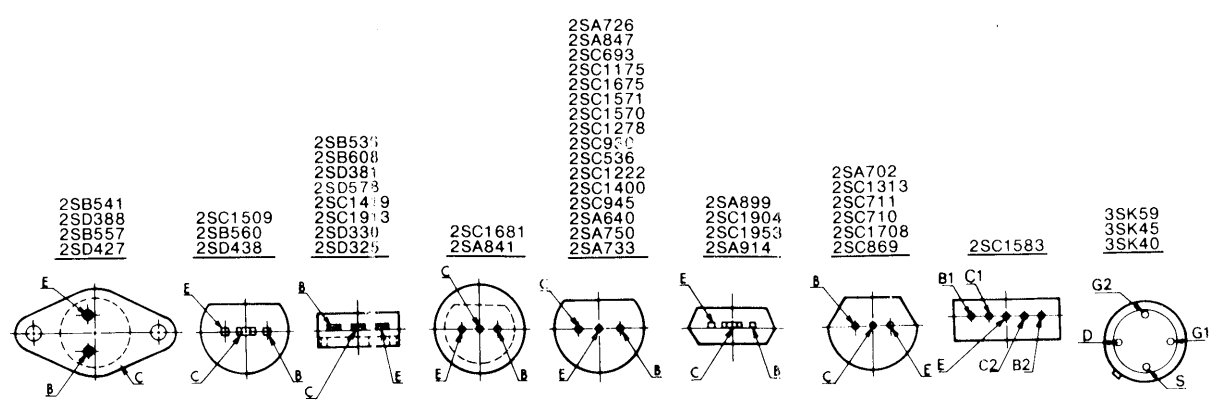

Ref No	MAIN	SUBSTITUTE
TR101, 102	35K40	35K45 35K59
TR103	25C710	25C1342
TR201, 203	25C930	25C710, 25C1675
TR202, 204, 301	25C536	25C945, 25C711,
TR302, 304	25C1222	25C1313, 25C1571 25C1570
TR303, 305	25A640	25A726, 25A702, 25A841
TR401	25C945	25C693
TR501, 502 504	25A841	25A847, 25A750
TR503	25C1708	25C1681, 25C1400
TR601	25C1583	2PCS of 25C1681, 25C1400, 25C1708
TR602	25C1708	25C1681, 25C1400
TR604	25A899	25A818, 25A914
TR605	25C1953	25C1628, 25C1904
TR606	25C945	25C536, 25C711
TR607, 2 O 5	25A733	25A678
TR609	25A913	25B536, 25B608
TR608	25C1913	25D381, 25D578
TR651, 652	25D427	25D388A2
TR653, 654	25B657	25B541A2
TR801, 802	25C869	25C1278
TR803, 804	25C1400	25C1708
TR805	25A750	25A847
TR806, 810	25C945	25C711A, 25C536
TR807	25C1400	25C1708
TR808	25D438	25C1509
TR809	25D330	25C1419
TR811	25B560	
TR812, 816	25A733	25A678
TR813	25D325	
TR815	25C945	25C1175
TR901, 906 907	25C1681	25C1708, 25C1400
TR902, 904	25C1681	25C1313, 25C1708, 25C1222, 25C1400
TR905	25A841	25A847, 25A750
TR903	25A841	25A726, 25A640, 25A847, 25A750

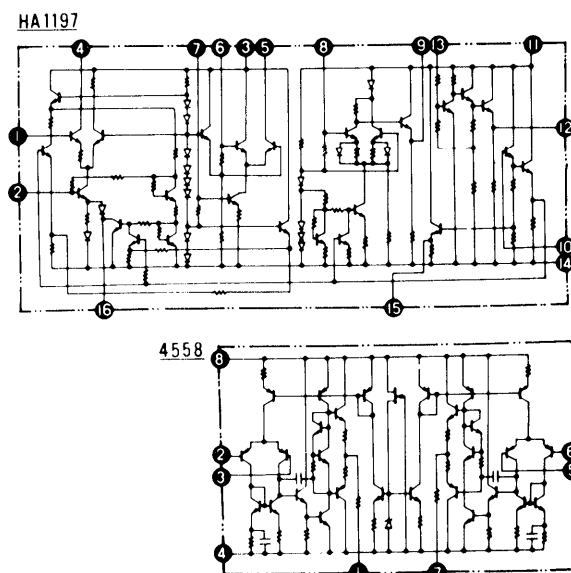

- Note: 1 Resistance values are indicated in ohms unless otherwise specified
(K=1,000, M=1,000,000)
2 Capacitance values are shown in microfarads unless otherwise noted
(P=picro - microfarads)
3 Component values are subject to change without notice
4 DC voltages are referenced to ground under the following conditions
No signal
V.....DC
V.....AC (at 1kHz, 8 ohms load, 'all signal)