
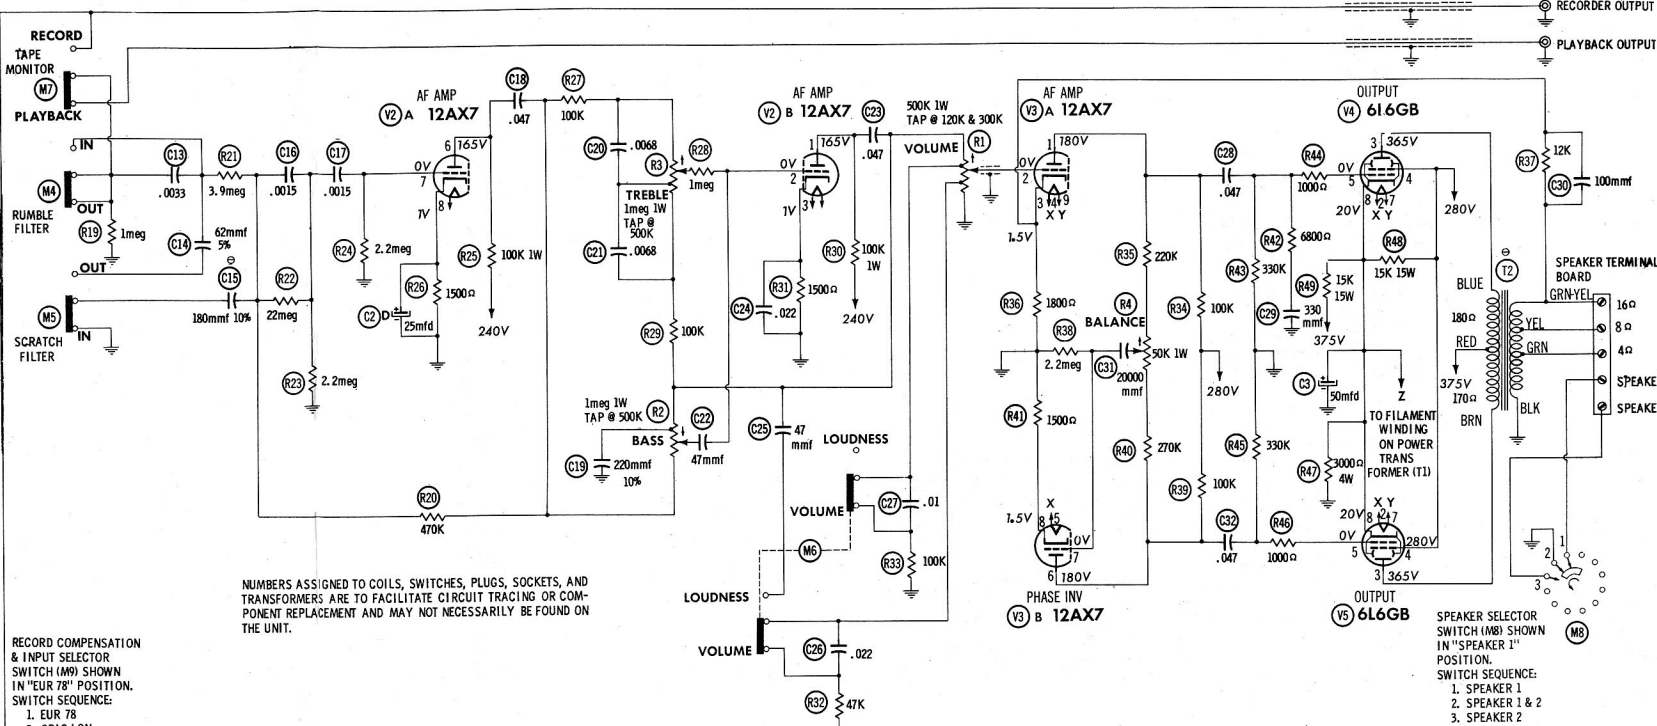


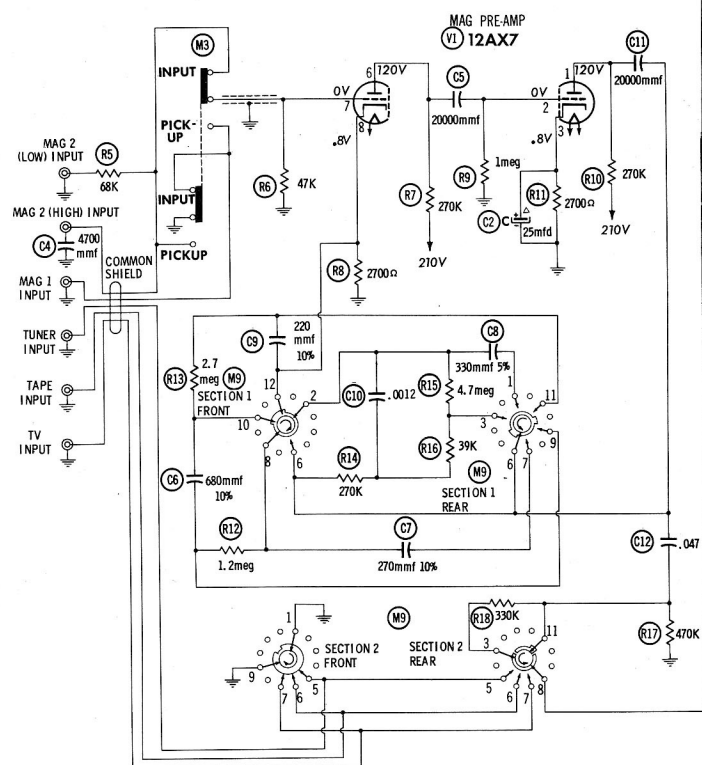


RECORD COMPENSATION & INPUT SELECTOR SWITCH (M9) SHOWN IN "EUR 78" POSITION. SWITCH SEQUENCE:

1. EUR 78
2. ORIG LON
3. ORIG AES
4. RIAA NARTB
5. ORIG COL
6. NARTB TAPE
7. TUNER
8. TAPE
9. TV

ITEM	TUBE	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9
V1	12AX7	1335K	1meg	2700Ω	0Ω	12Ω	1335K	47K	2700Ω	6Ω
V2	12AX7	1120K	1.5meg	1500Ω	24Ω	12Ω	1120K	2.2meg	1500Ω	18Ω
V3	12AX7	1105K	0Ω	1800Ω	24Ω	24Ω	1105K	2.2meg	1500Ω	24Ω
V4	6L6GB	TP	24Ω	1370K	14000Ω	330K	TP	24Ω	24Ω	
V5	6L6GB	TP	24Ω	1360K	14000Ω	330K	TP	24Ω	24Ω	
V6	5U4GA	NC	1	NC	40Ω	TP	35Ω	TP	1	

THIS READING WILL VARY DEPENDING UPON THE CONDITION OF THE ELECTROLYTIC IN THE CIRCUIT. MEASURED FROM PIN 2 OF V6. NC NO CONNECTION. TP TIE POINT.

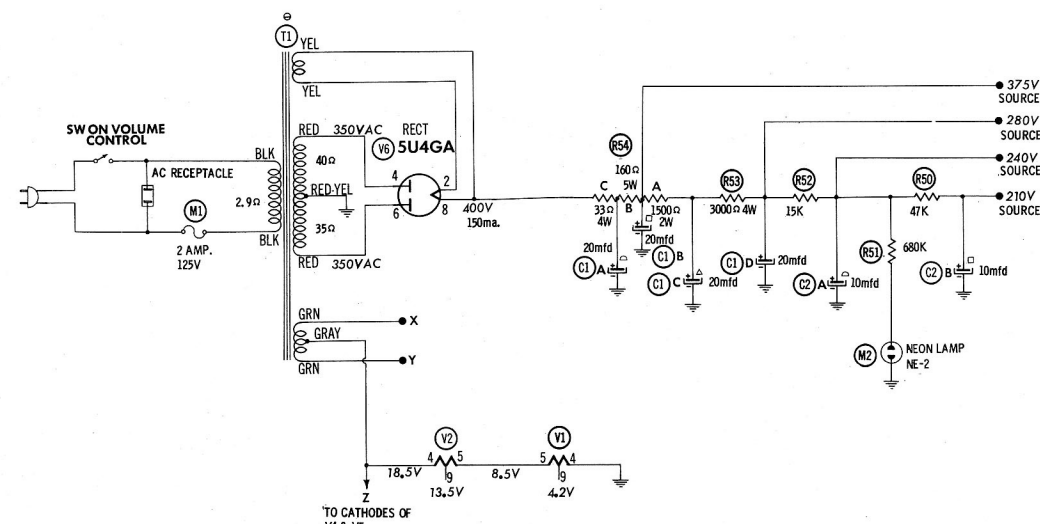

1. DC voltage measurements taken with vacuum tube voltmeter; AC voltages measured at 1000 ohms per volt.
2. Socket connections are shown as bottom views.
3. Measured values are from socket pin to common negative.
4. Line voltage maintained at 117 volts for voltage readings.
5. Nominal tolerance of component values makes possible a variation of ±1% in voltage and resistance readings.
6. All controls at minimum, proper output load connected.

SEE PARTS LIST FOR ALTERNATE VALUE OR APPLICATION

DC COIL RESISTANCE VALUES UNDER ONE OHM NOT SHOWN ON SCHEMATIC DIAGRAM

ARROWS ON CONTROLS INDICATE CLOCKWISE ROTATION (CONTROL VIEWED FROM SHAFT END)