





SERVICE MANUAL

SPEAKER SYSTEM CS-66G


1. SPECIFICATIONS

Enclosure Totally-enclosed type
System 3-way 3-speaker system
Loudspeakers:
Woofer 25cm (10 in.) cone type
Midrange 16cm (6-5/16 in.) cone type
Tweeter 7.7cm (5/16 in.) cone type
Frequency Range 35 to 20,000Hz
Nominal Impedance 8Ω
Sensitivity 92.5dB/W at 1m distance
Maximum Input Power 40W
Crossover Frequency 1,000Hz, 7,000Hz
Dimensions 319(W) x 550(H) x 290(D) mm
10-5/8(W) x 21-11/32(H) x 11-7/16(D) in.
Weight 12 kg/26 lb. 6 oz.


NOTE: Specifications and the design subject to possible modification without notice due to improvements.

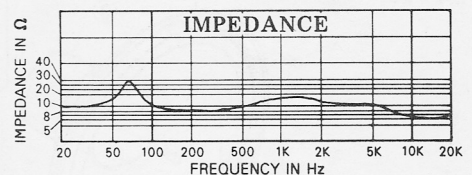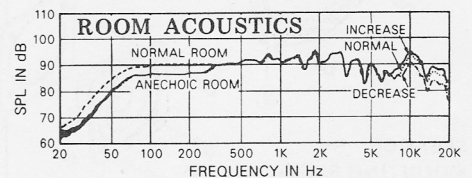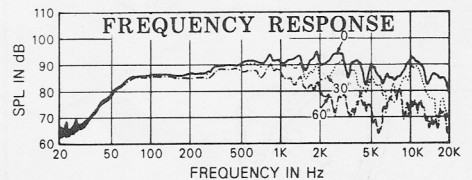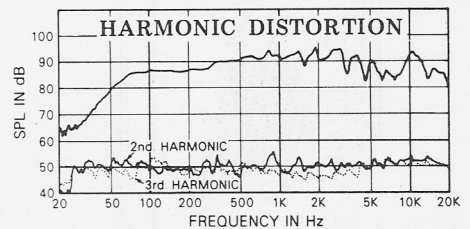

2. EXPLODED VIEW AND PART LISTS

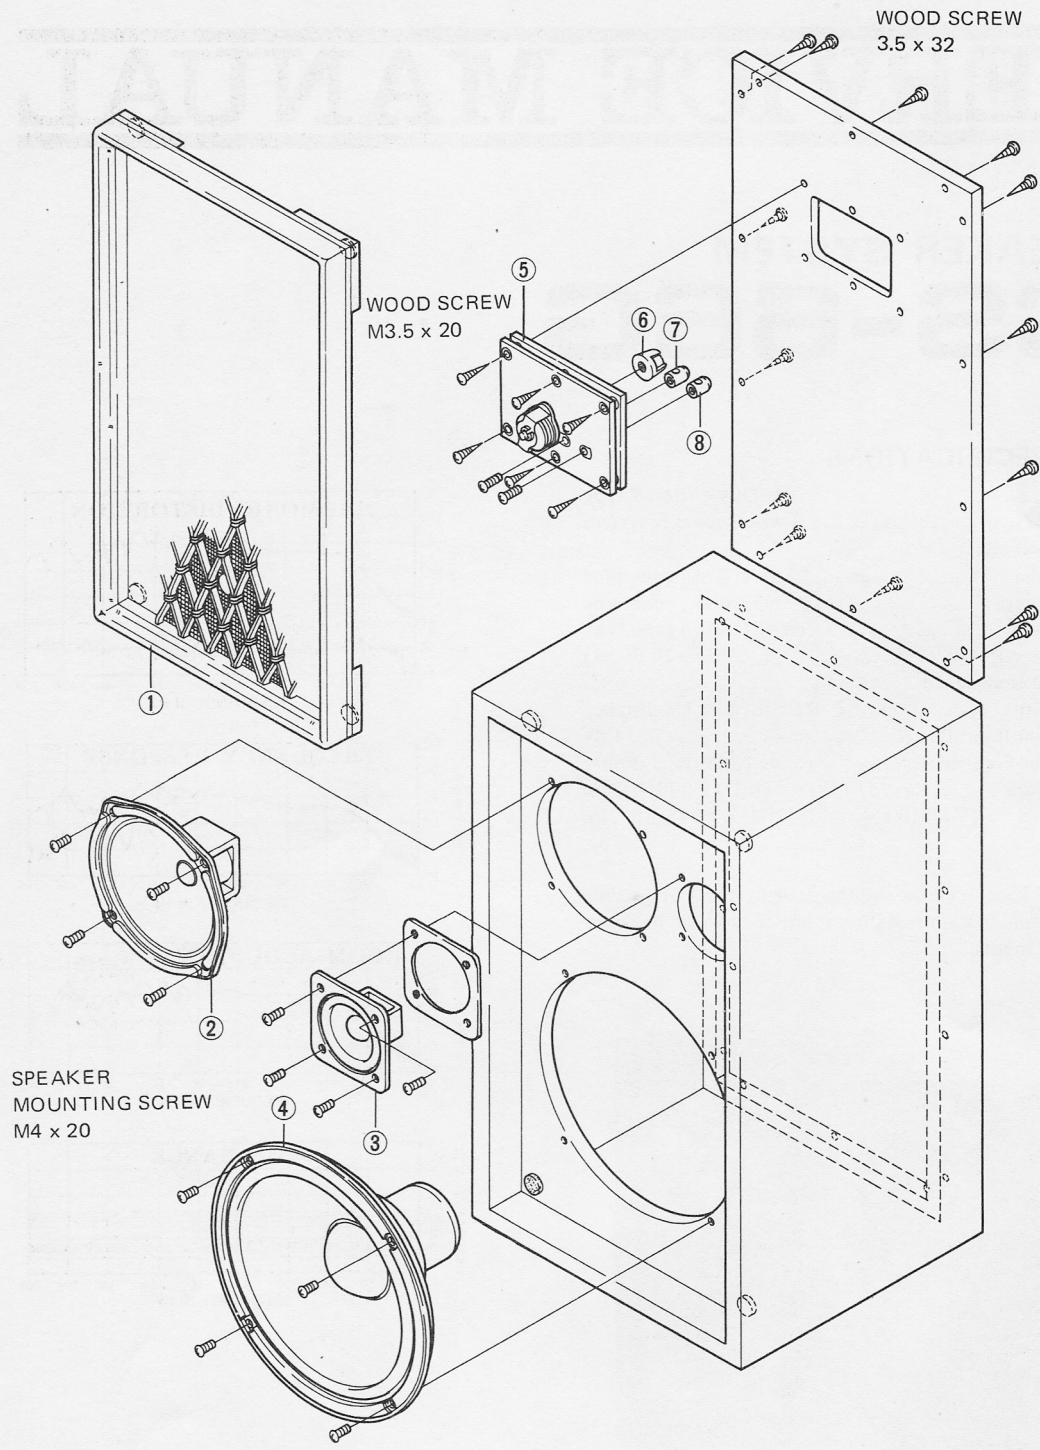


PACKING

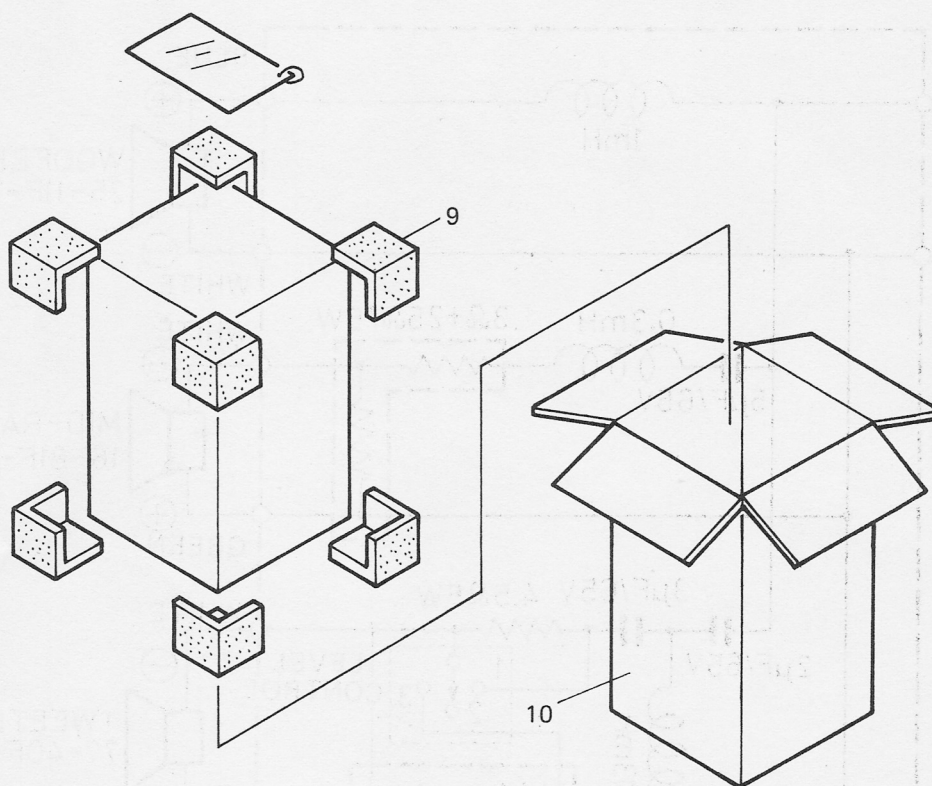

PART LISTS

Symbol	Description	Part No.
1	Grille assembly	SXB-124-0
2	Mid range	16-81F-3
3	Tweeter	77-40F-2
4	Woofer	25-11F-1
5	Network assembly	SWN-055-A
6	Level control knob	A19-621-0
7	Input terminal <u>(blue)</u>	K15-612-B
8	Input terminal <u>(white)</u>	K15-612-C
9	Corner pad	SHA-018-0
10	Packing case	SHG-096-0
	Operating guide	SRB-084-0
	Felt pad	E11-048-A

3. CIRCUIT DIAGRAM

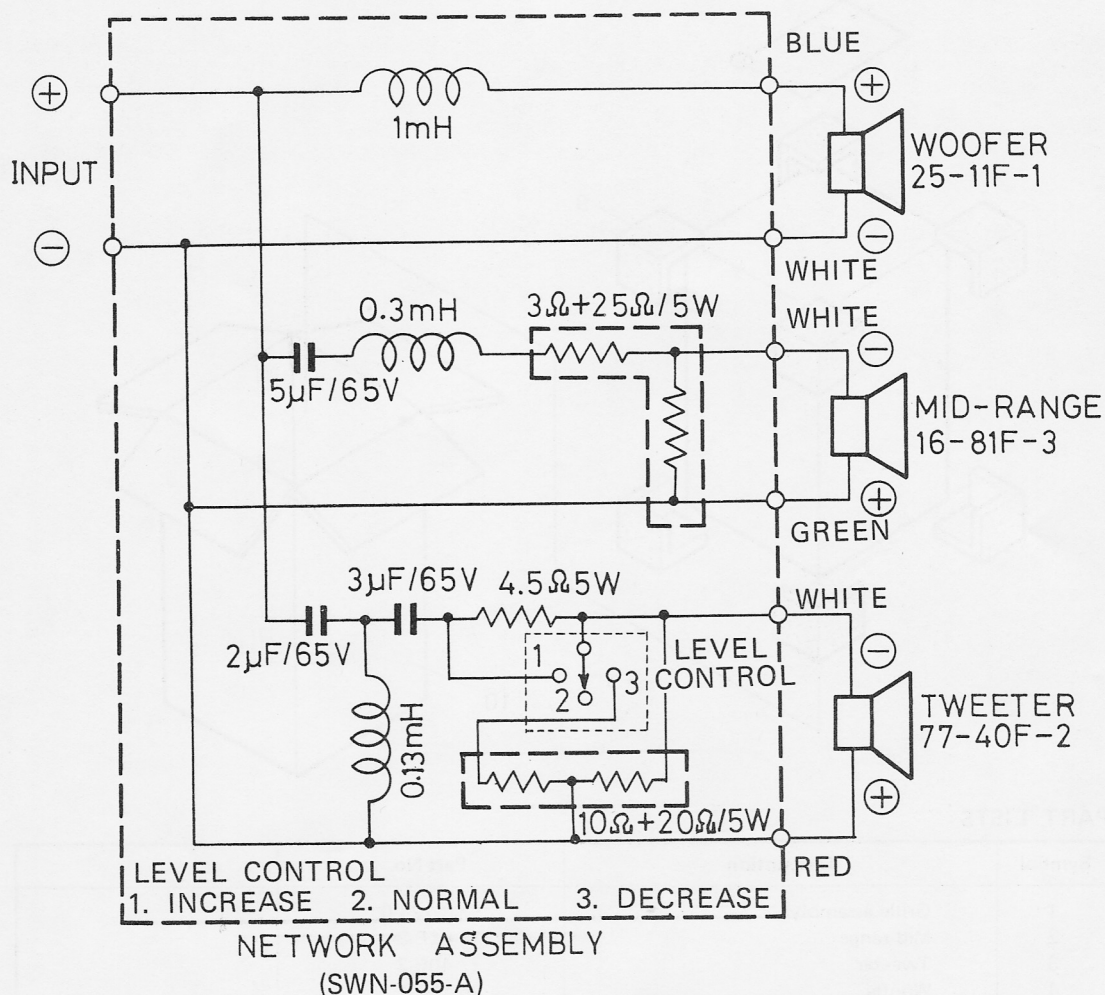

PIONEER ELECTRONIC CORPORATION

4-1, 1-Chome, Meguro, Meguro-ku, Tokyo 153, Japan
U.S. PIONEER ELECTRONICS CORPORATION
178 Commerce Road, Carlstadt, New Jersey 07072, U.S.A.

PIONEER ELECTRONIC (EUROPE) N.V.
Mein-Center, Meir 21, 2000 Antwerp, Belgium
PIONEER ELECTRONICS AUSTRALIA PTY. LTD.
256-B City Road, South Melbourne, Victoria 3205, Australia