





QUADRAPHONIC POWER AMPLIFIER

QM-800A


FVW

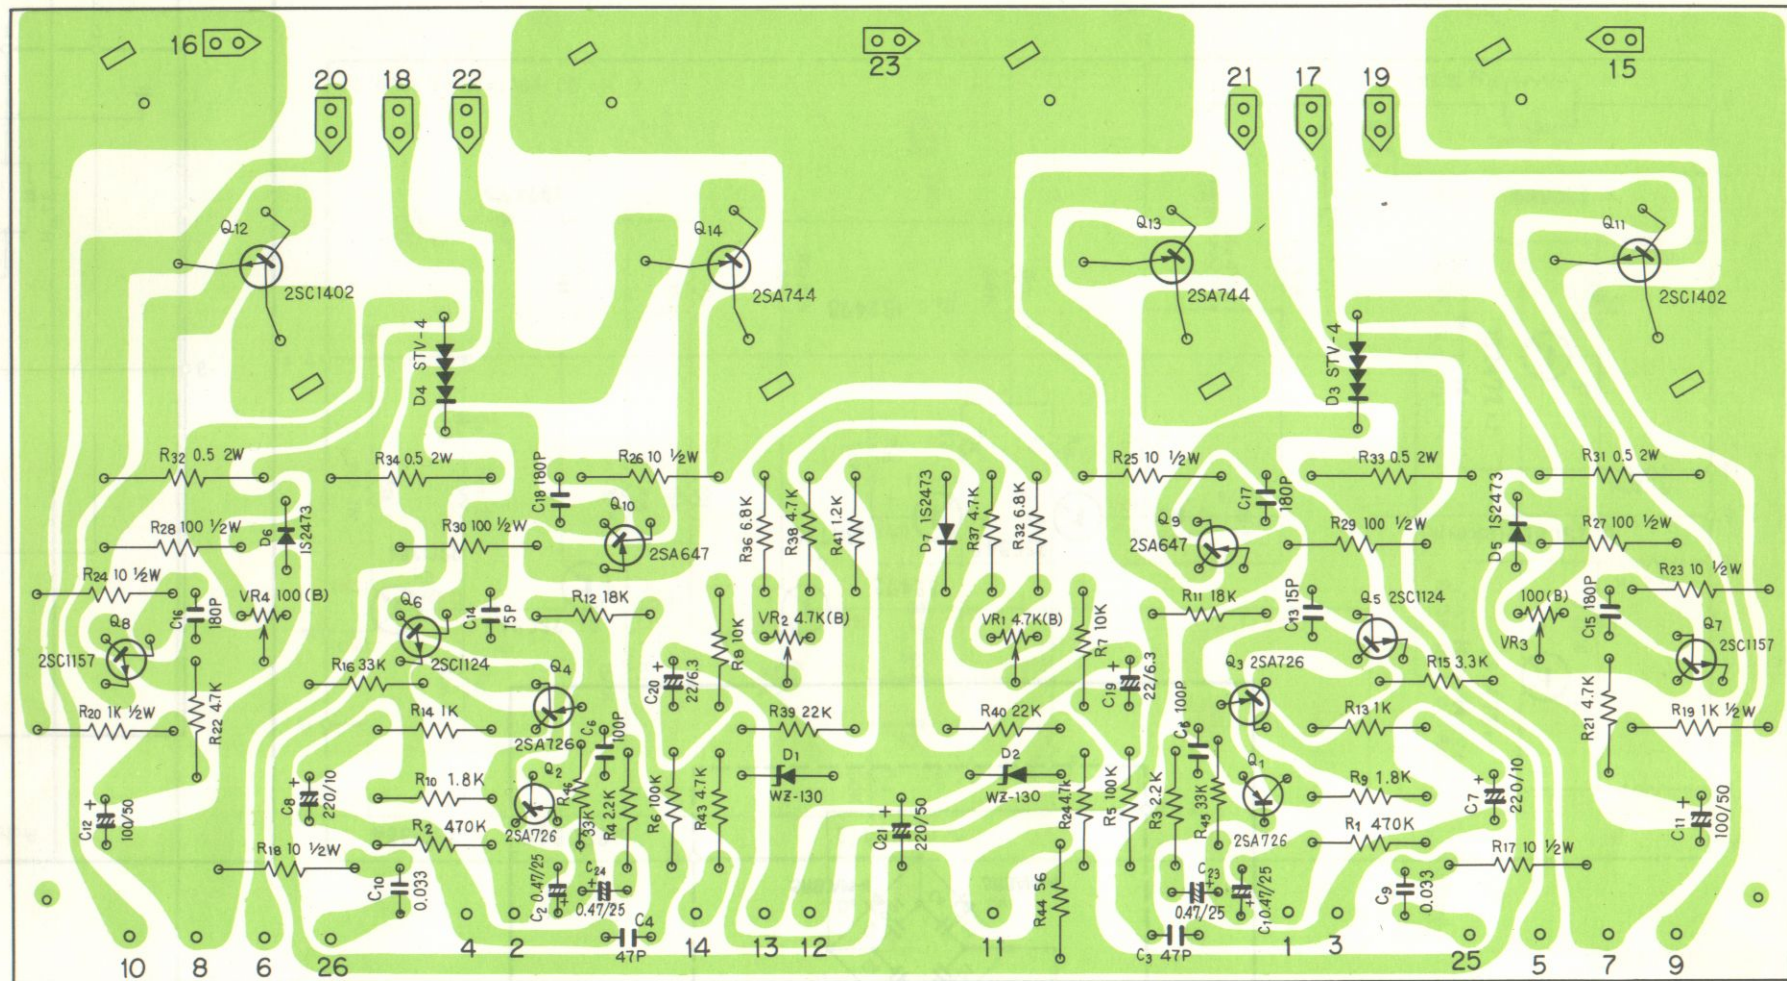


Power supply ass'y AWR-001

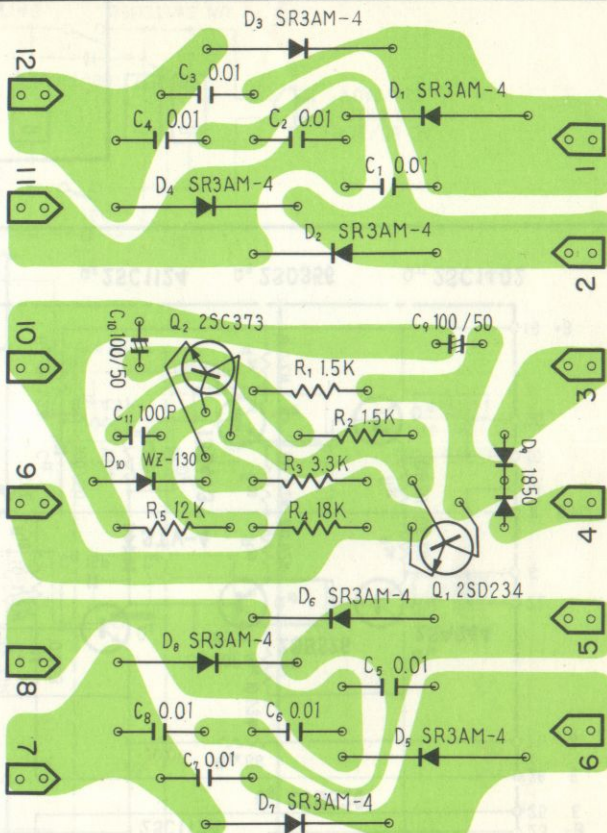

Protection ass'y AWM-028

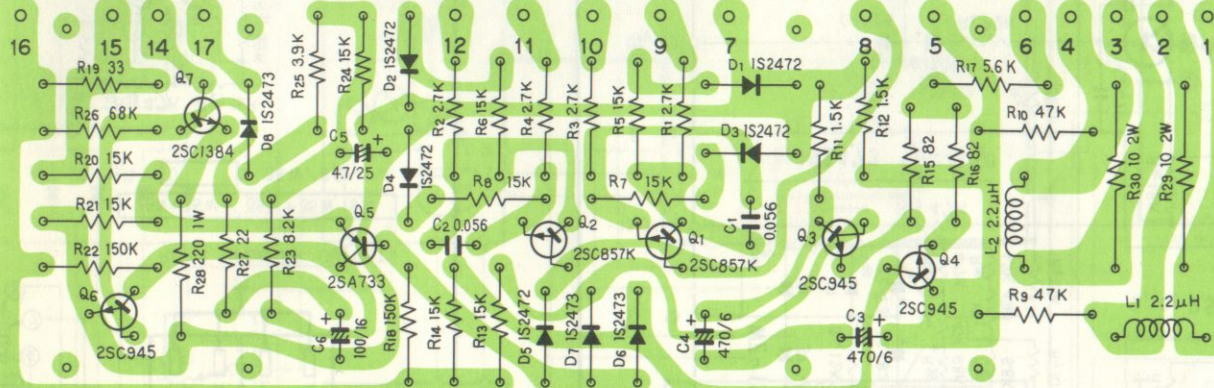

Protection ass'y AWM-029

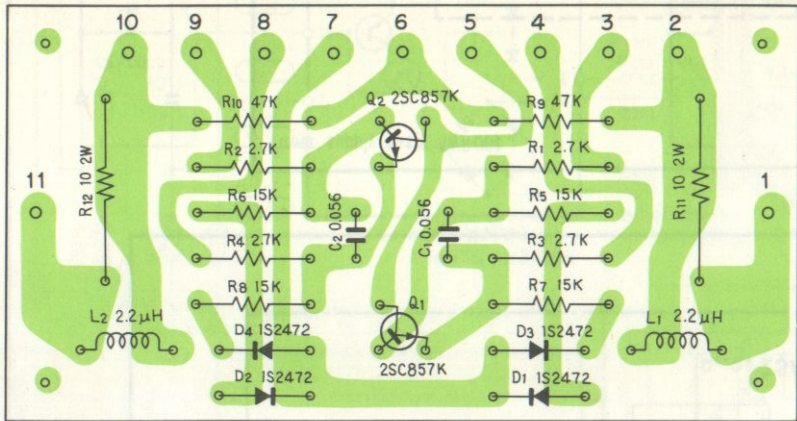

QM-800A


FRONT L
(CH-1)
500mV

FRONT R
(CH-3)
500mV

REAR L
(CH-2)
500mV

REAR R
(CH-4)
500mV

INPUTS

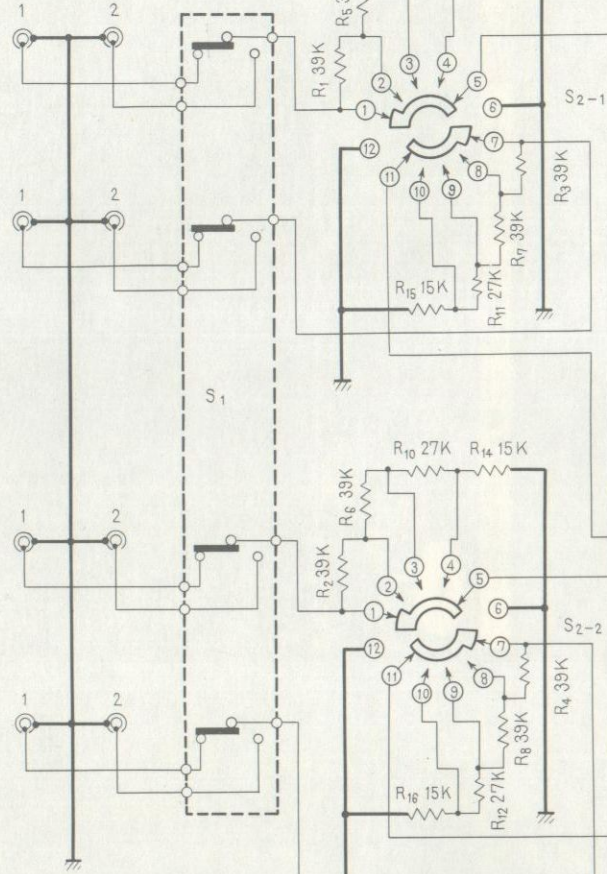

POWER AMP
(AWH-015)

PROTECTION
(AWM-029)

POWER AMP
(AWH-015)

PROTECTION
(AWM-028)

POWER SUPPLY
(AWR-001)

POWER TRANSFORMER

AC 50/60Hz
110, 120, 130,
220, 240V

UN SWITCHED
TOTAL 100VA MAX

SWITCHED
60VA MAX

SWITCHES

S₁: INPUT SELECTOR 1-2

S₂: INPUT LEVEL

(1) 0.5V

(2) 1V

(3) 2V

LEVEL METER
LAMP
8V 250mA x 4

FRONT SPEAKER OUTPUTS

REAR SPEAKER OUTPUTS


35W+35W / 35W+35W 8Ω
35W / 8Ω


IS188 x 4

LEVEL METERS


NOTES

- V : SIGNAL VOLTAGE NECESSARY FOR OBTAINING 35W/8Ω OUTPUT POWER(1KHz)
- A : DC CURRENT AT NO INPUT SIGNAL
- V : DC VOLTAGE AT NO INPUT SIGNAL
- V : DC VOLTAGE AT 35W/8Ω OUTPUT POWER

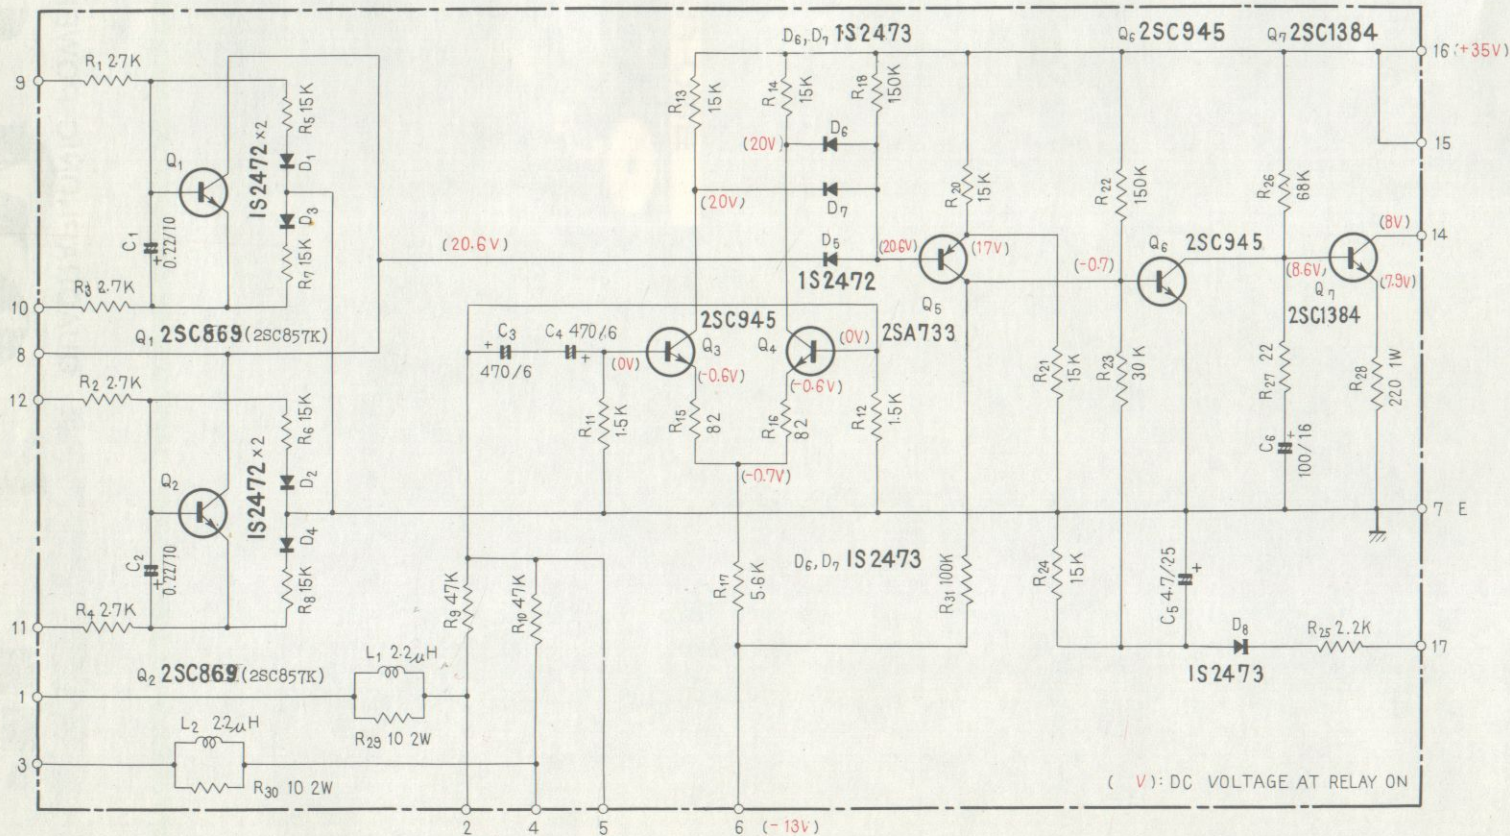

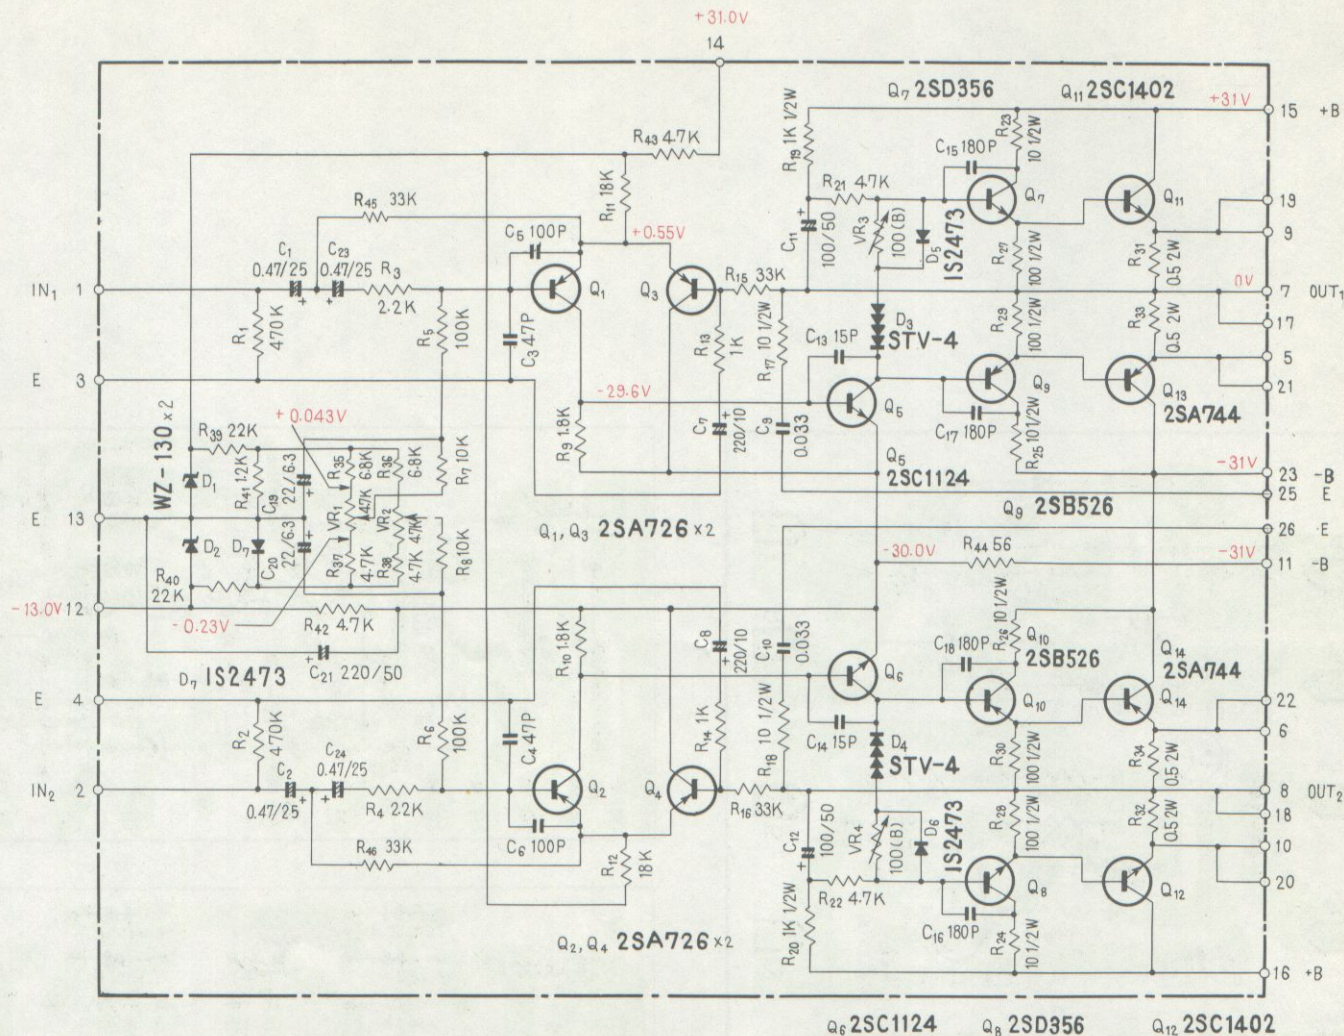

Power supply ass'y AWR-001

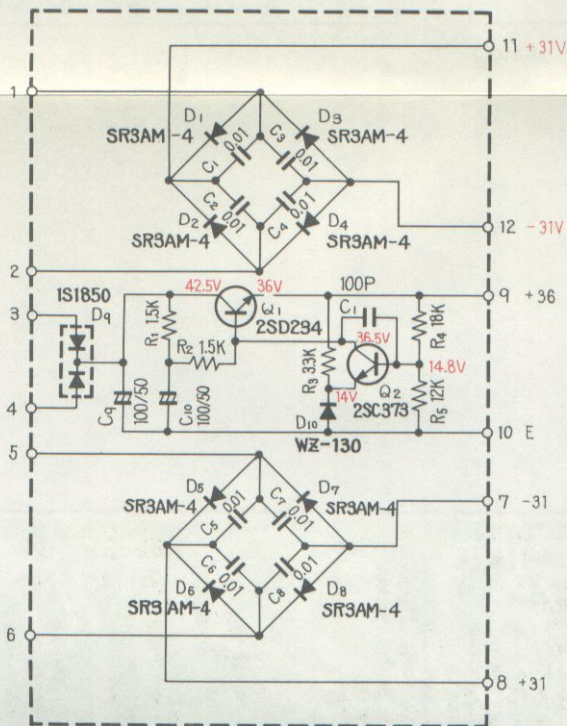

Protection ass'y AWM-029

