




# STEREO AMPLIFIER

# SA-8500II KU


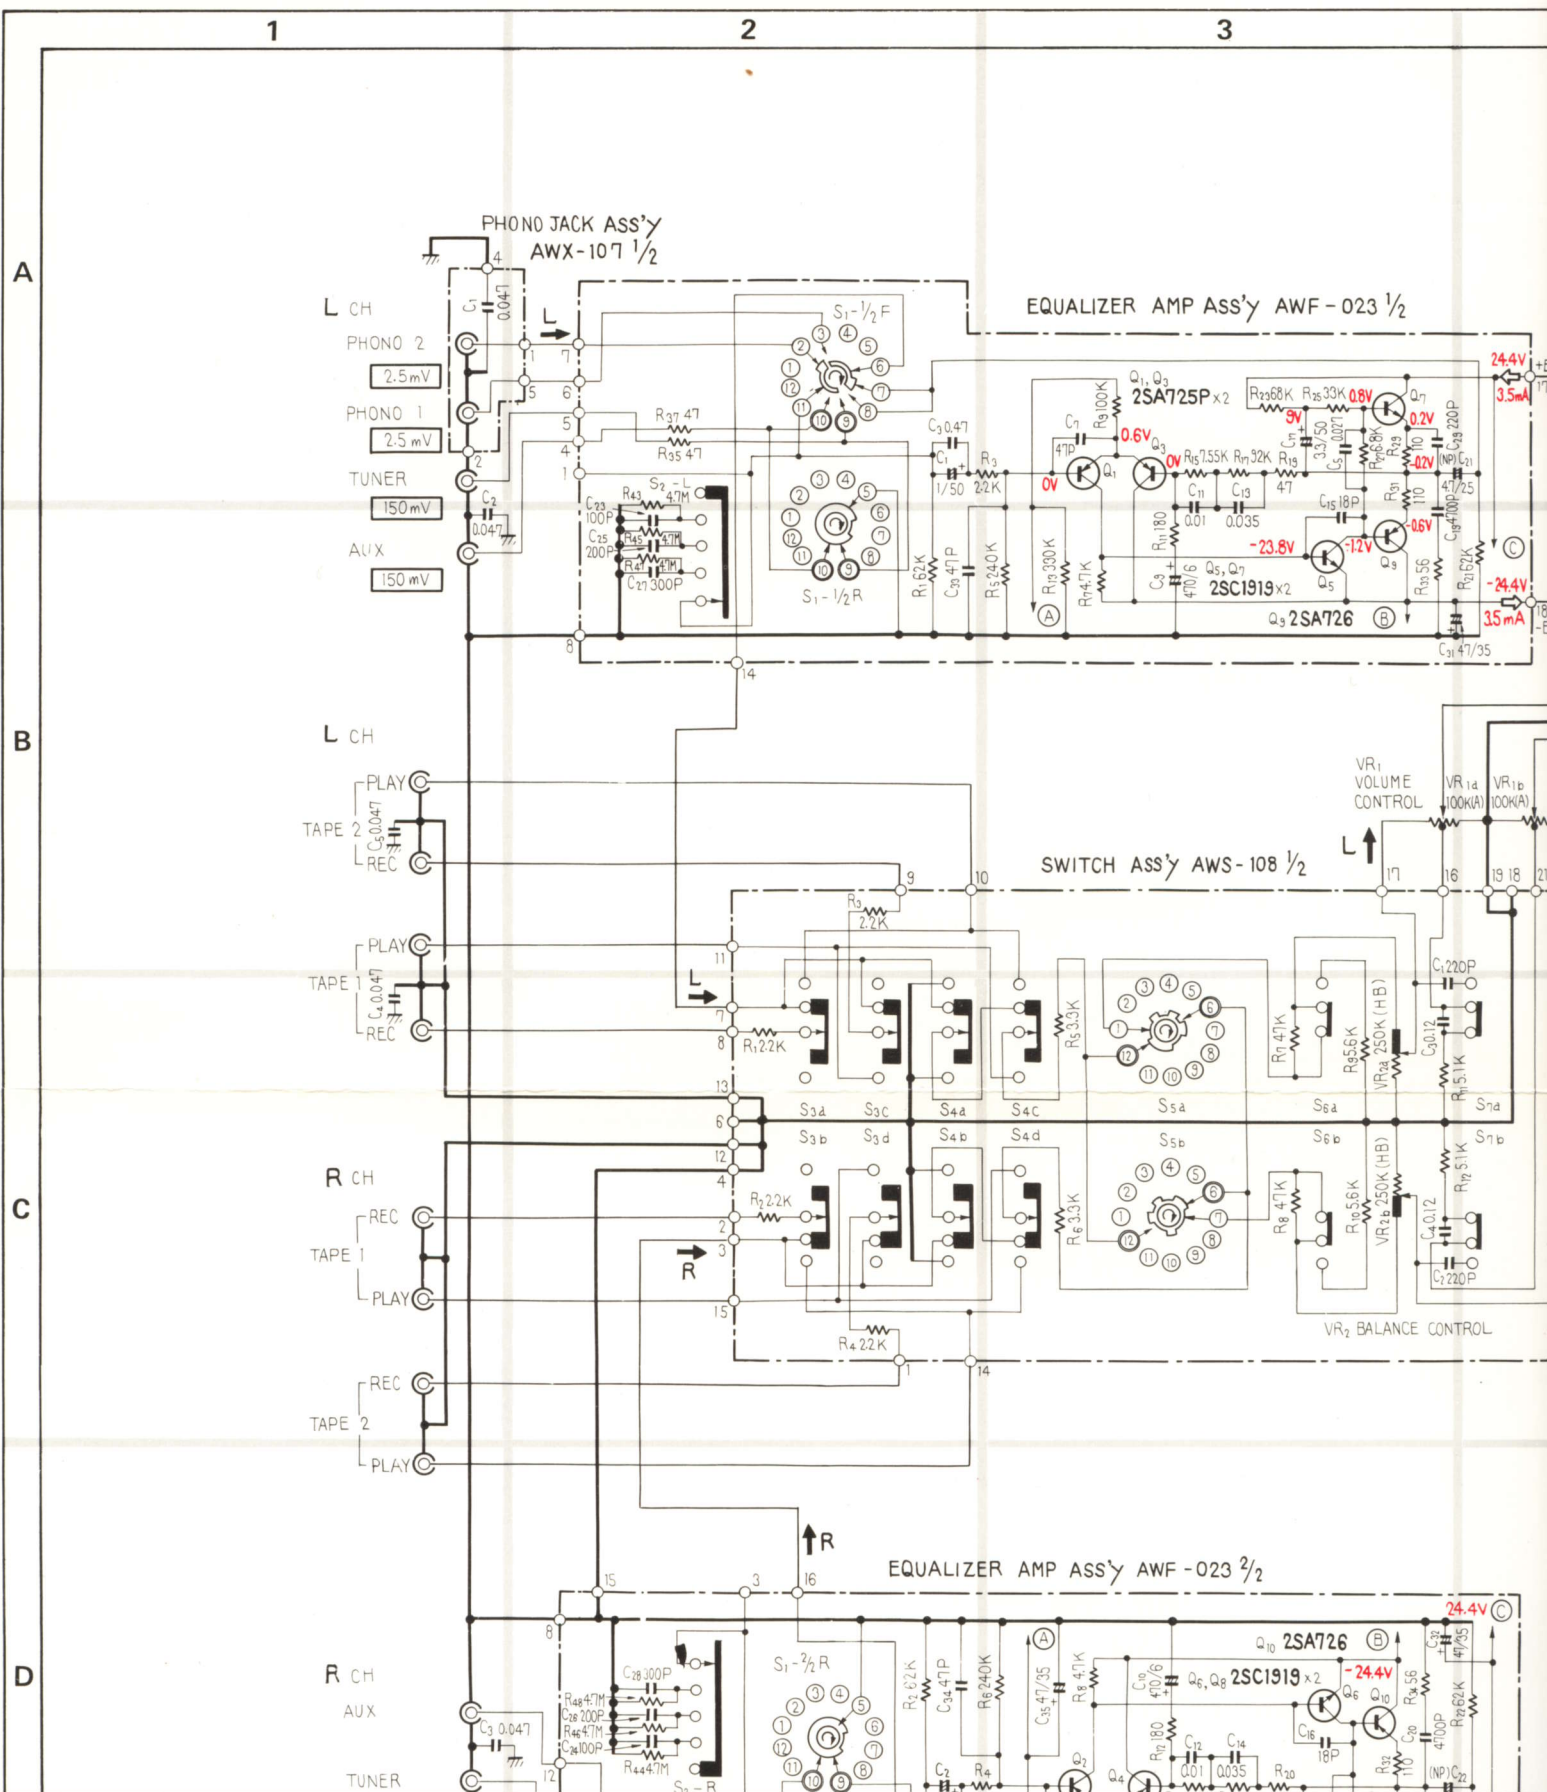


## CONTROL AMP ASS'Y AWG - 044


MP ASS'Y AWG - 023 1/2

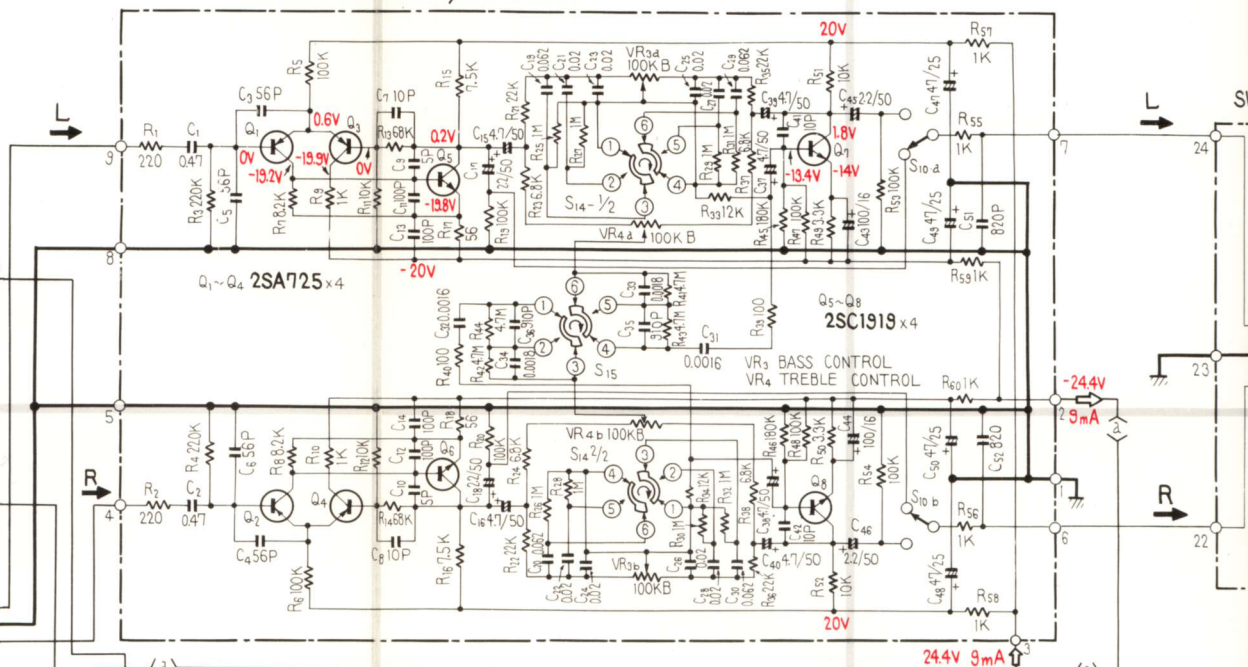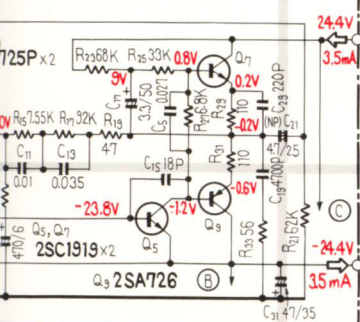


Y AWS - 108 1/2

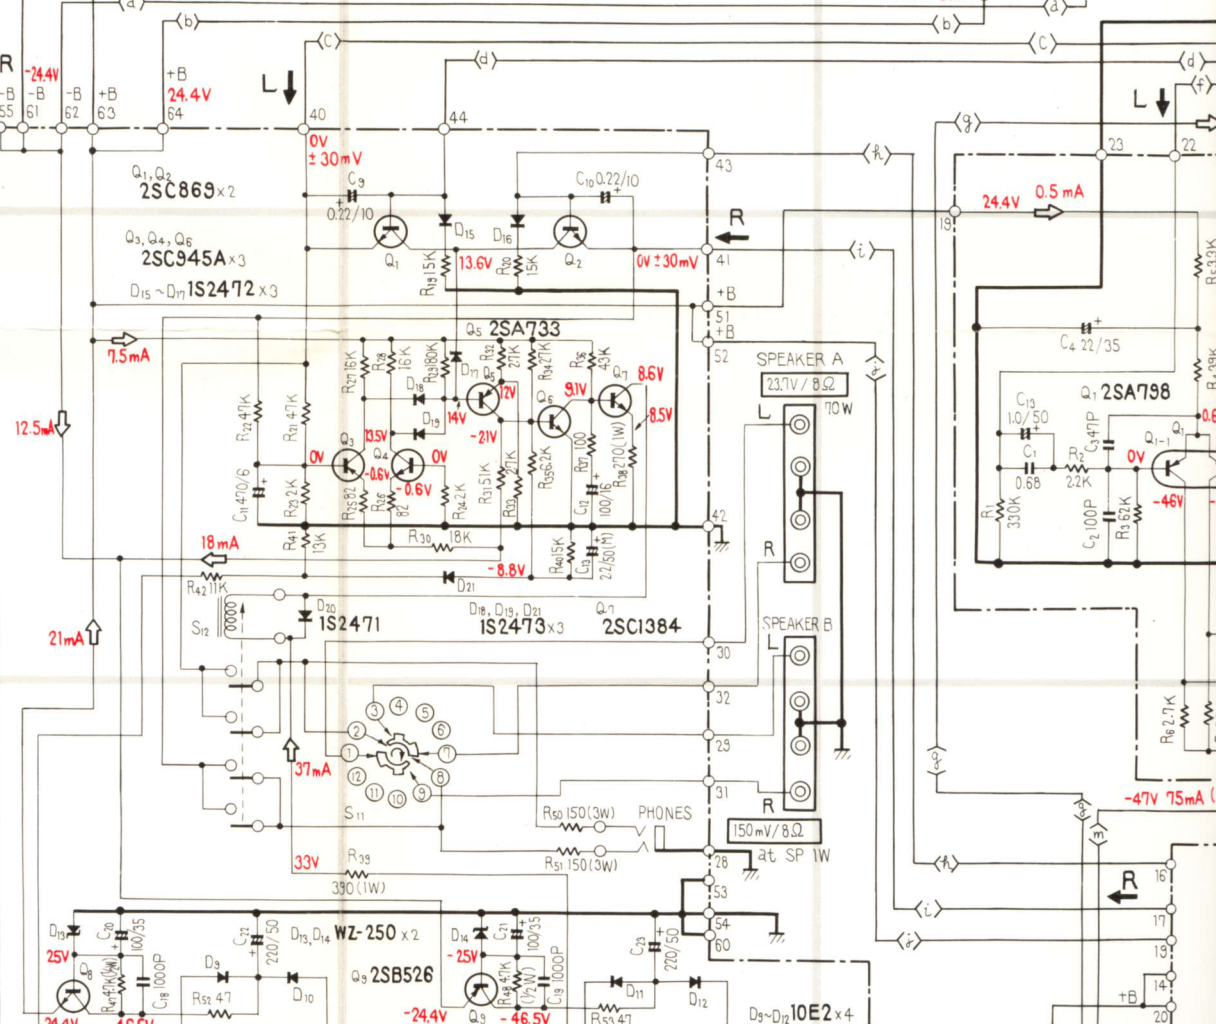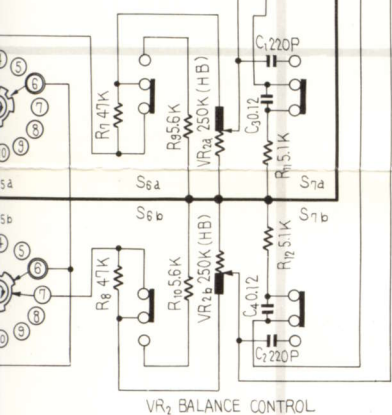

- 023 1/2

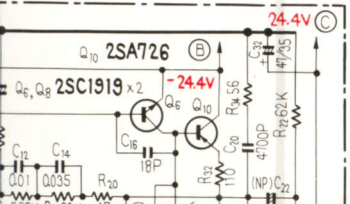







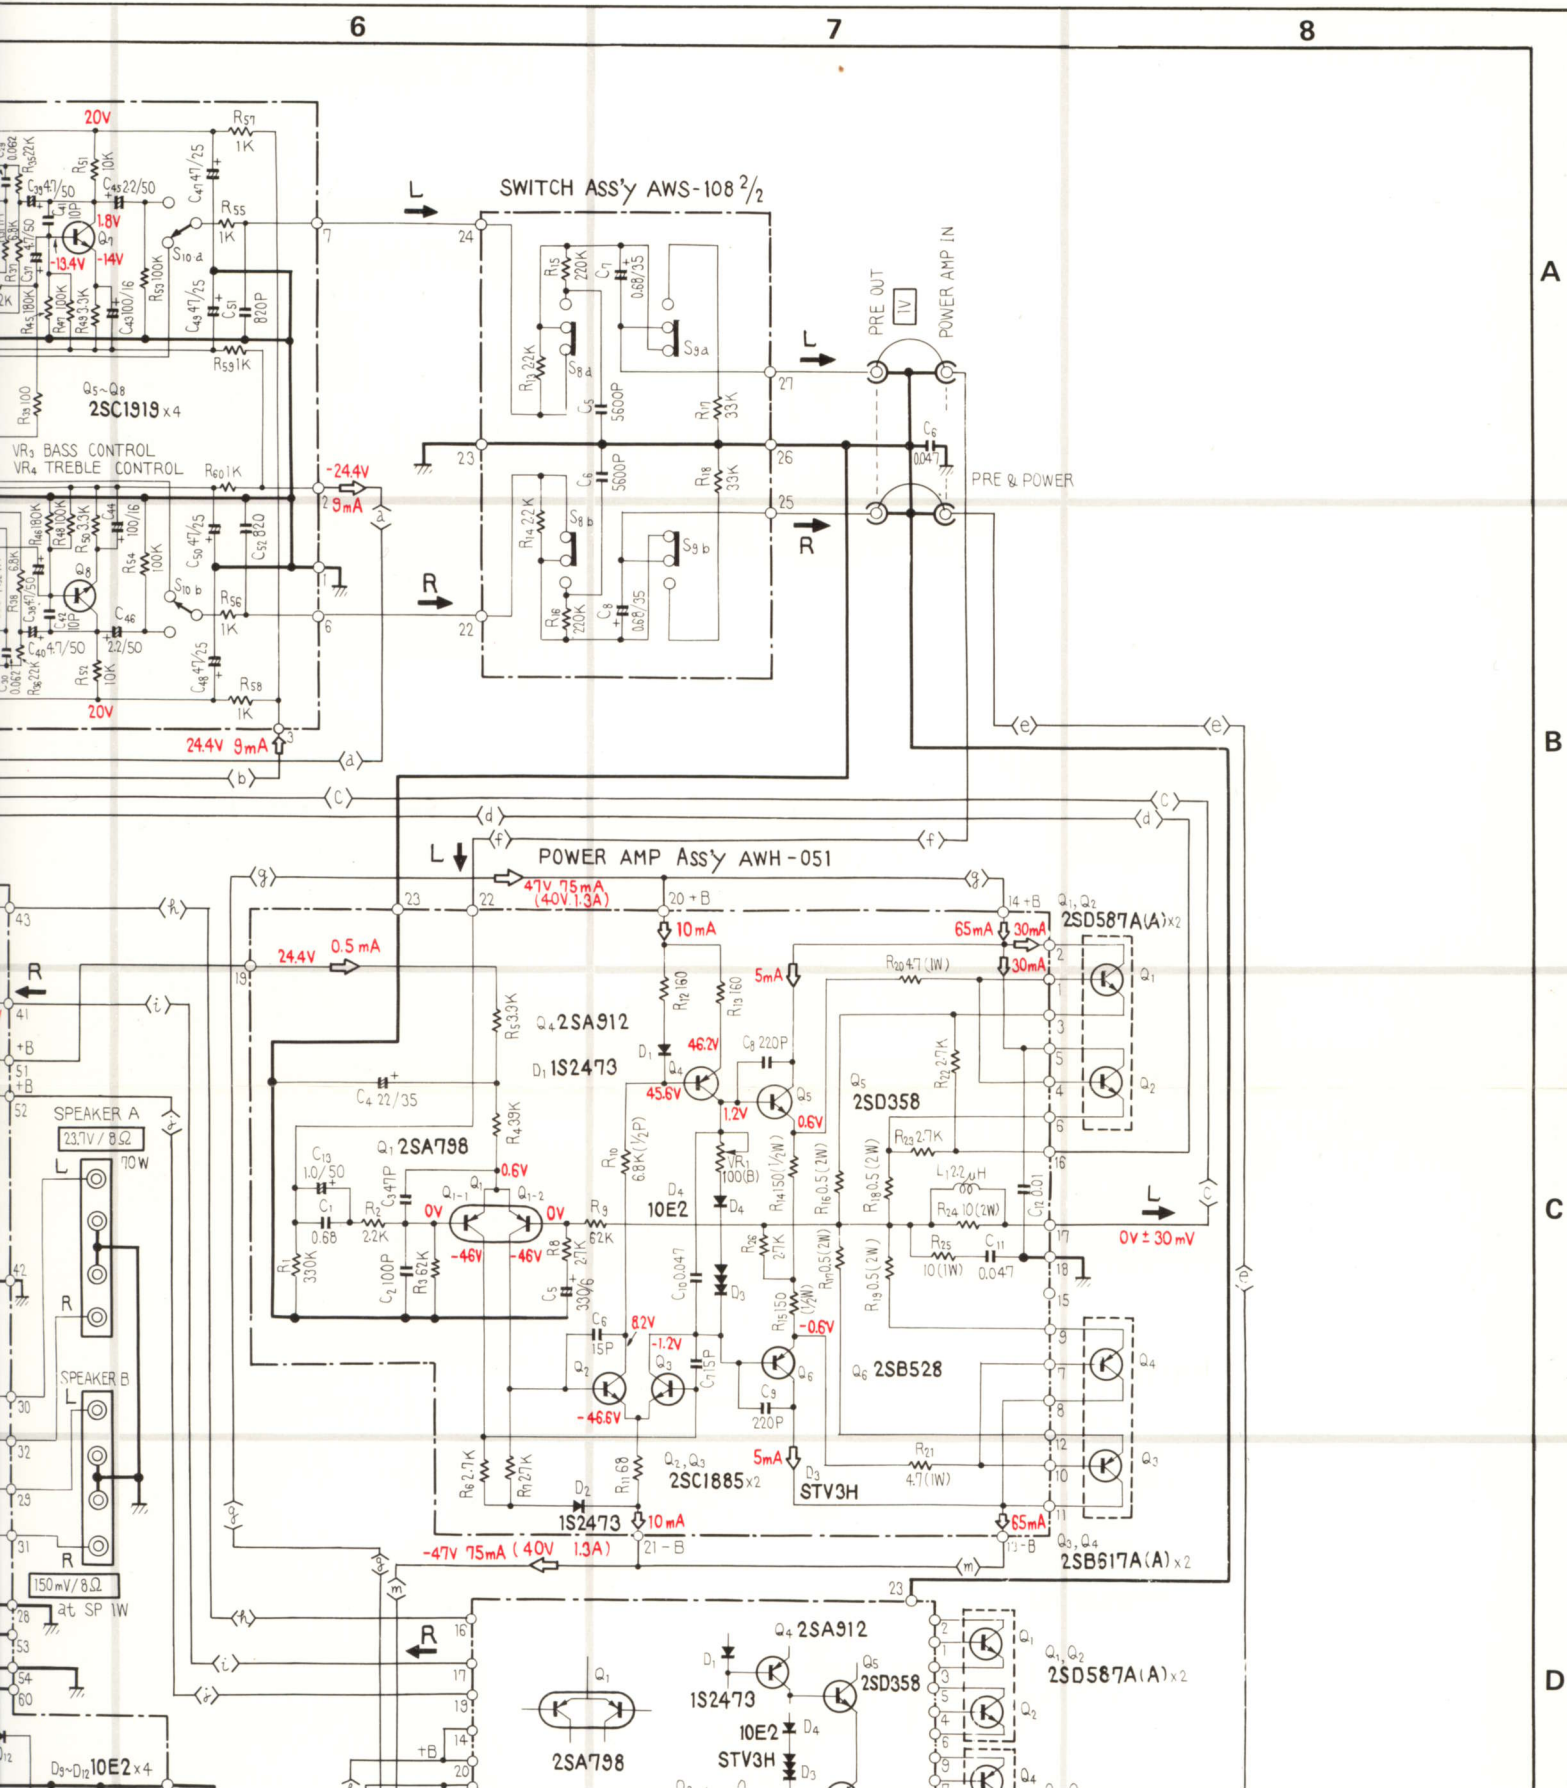





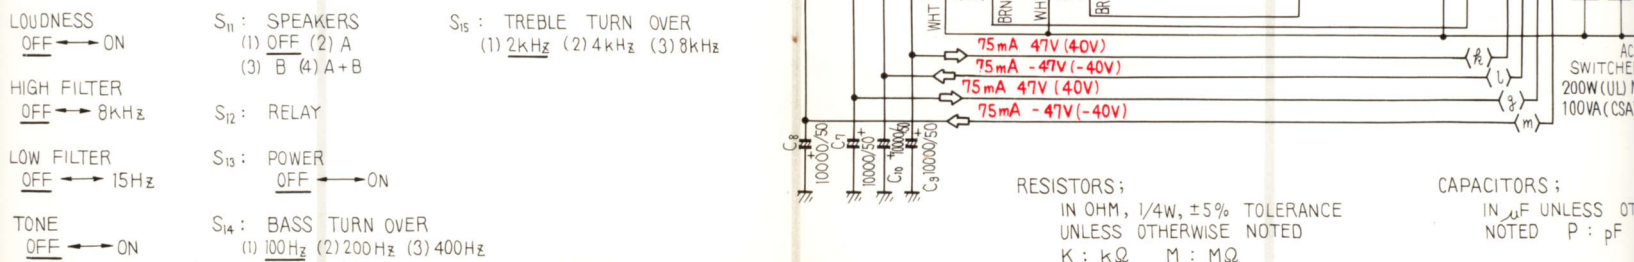

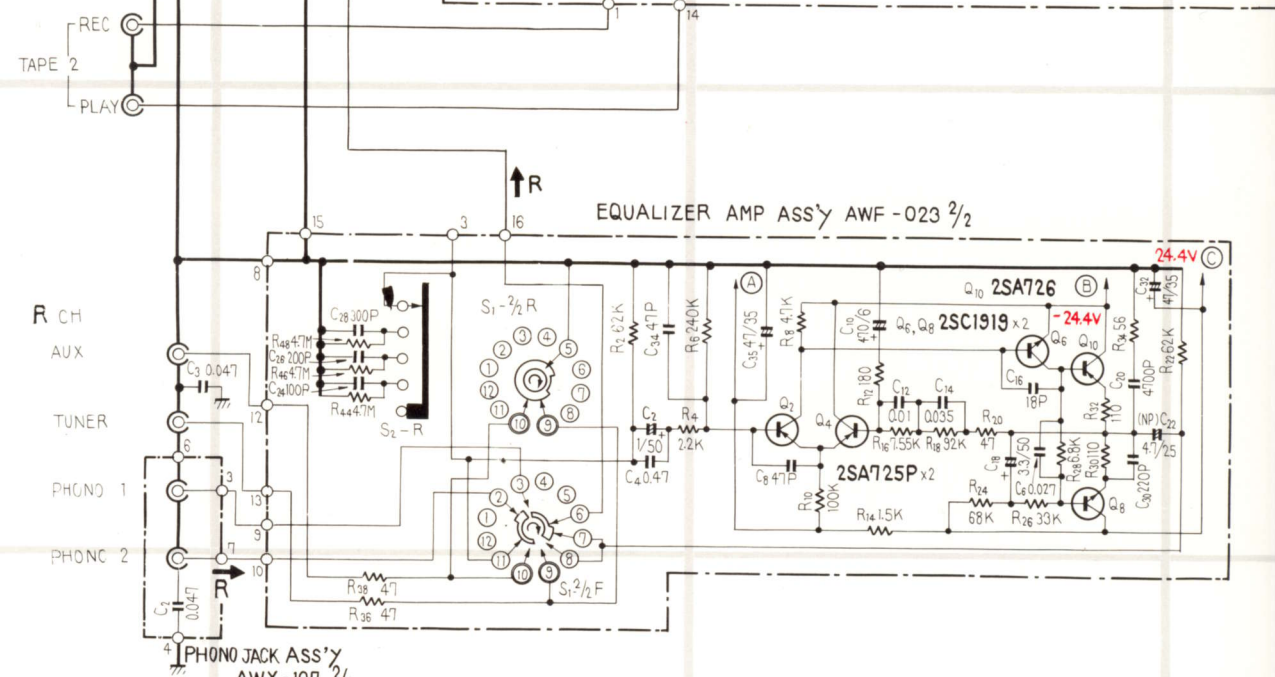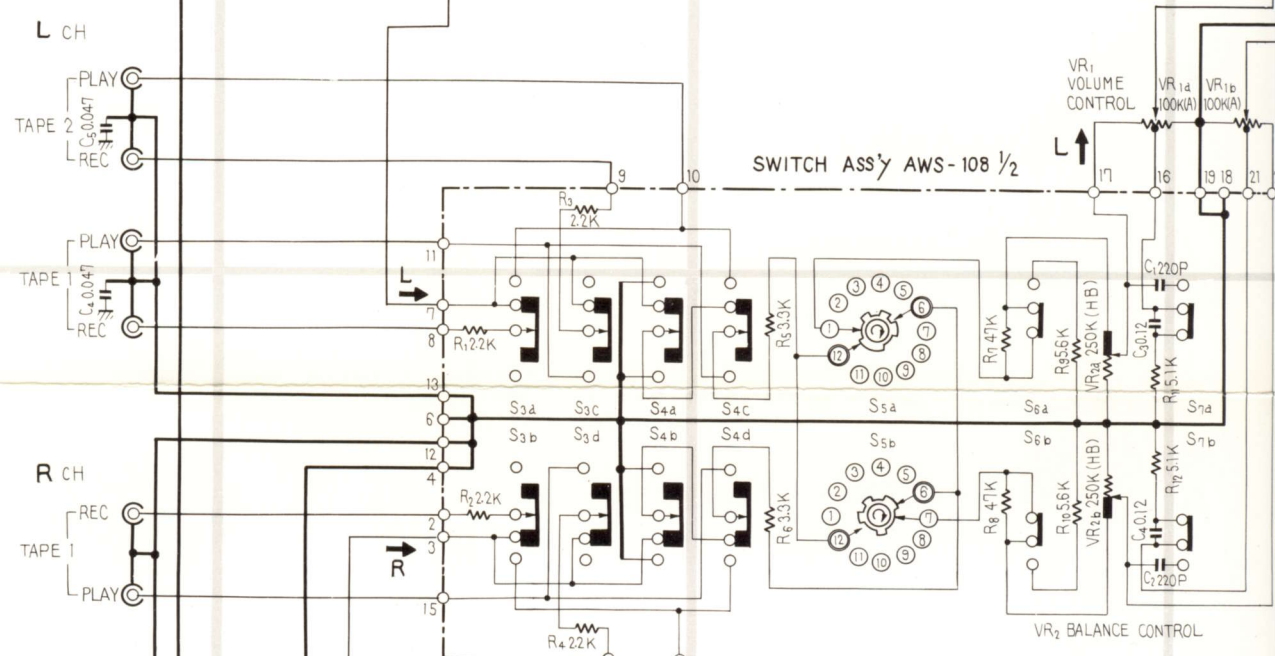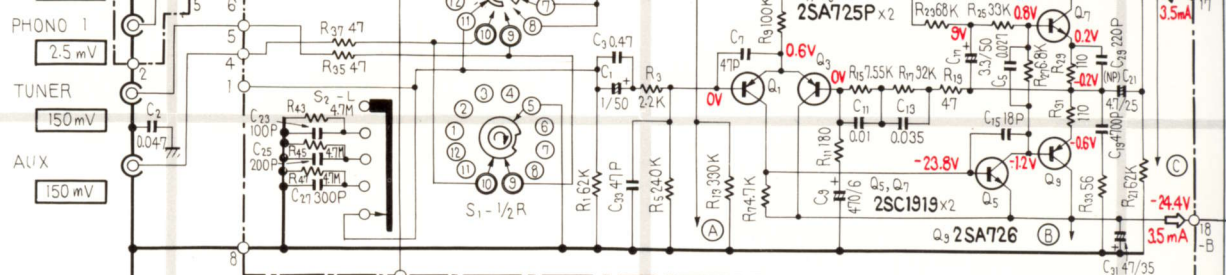

# SWITCHES:

S<sub>1</sub> : FUNCTION  
(1) PHONO 2 (2) PHONO 1  
(3) TUNER (4) AUX

S<sub>2</sub> : INPUT CAPACITANCE SELECTOR(pF)  
(1) 100 (2) 200 (3) 300 (4) 400

S<sub>3</sub> : DUPLICATE  
(1) 1 → 2 (2) OFF (3) 2 → 1

S<sub>4</sub> : TAPE MONITOR  
(1) 1 (2) OFF (3) 2

S<sub>5</sub> : MODE  
(1) REV (2) STEREO  
(3) L+R (4) L (5) R

S<sub>6</sub> : MUTING  
OFF → ON

S<sub>7</sub> : LOUDNESS  
OFF → ON

S<sub>8</sub> : HIGH FILTER  
OFF → 8KHz

S<sub>9</sub> : LOW FILTER  
OFF → 15Hz

S<sub>10</sub> : TONE  
OFF → ON

S<sub>11</sub> : SPEAKERS  
(1) OFF (2) A  
(3) B (4) A+B

S<sub>12</sub> : RELAY

S<sub>13</sub> : POWER  
OFF → ON

S<sub>14</sub> : BASS TURN OVER  
(1) 100Hz (2) 200Hz (3) 400Hz