




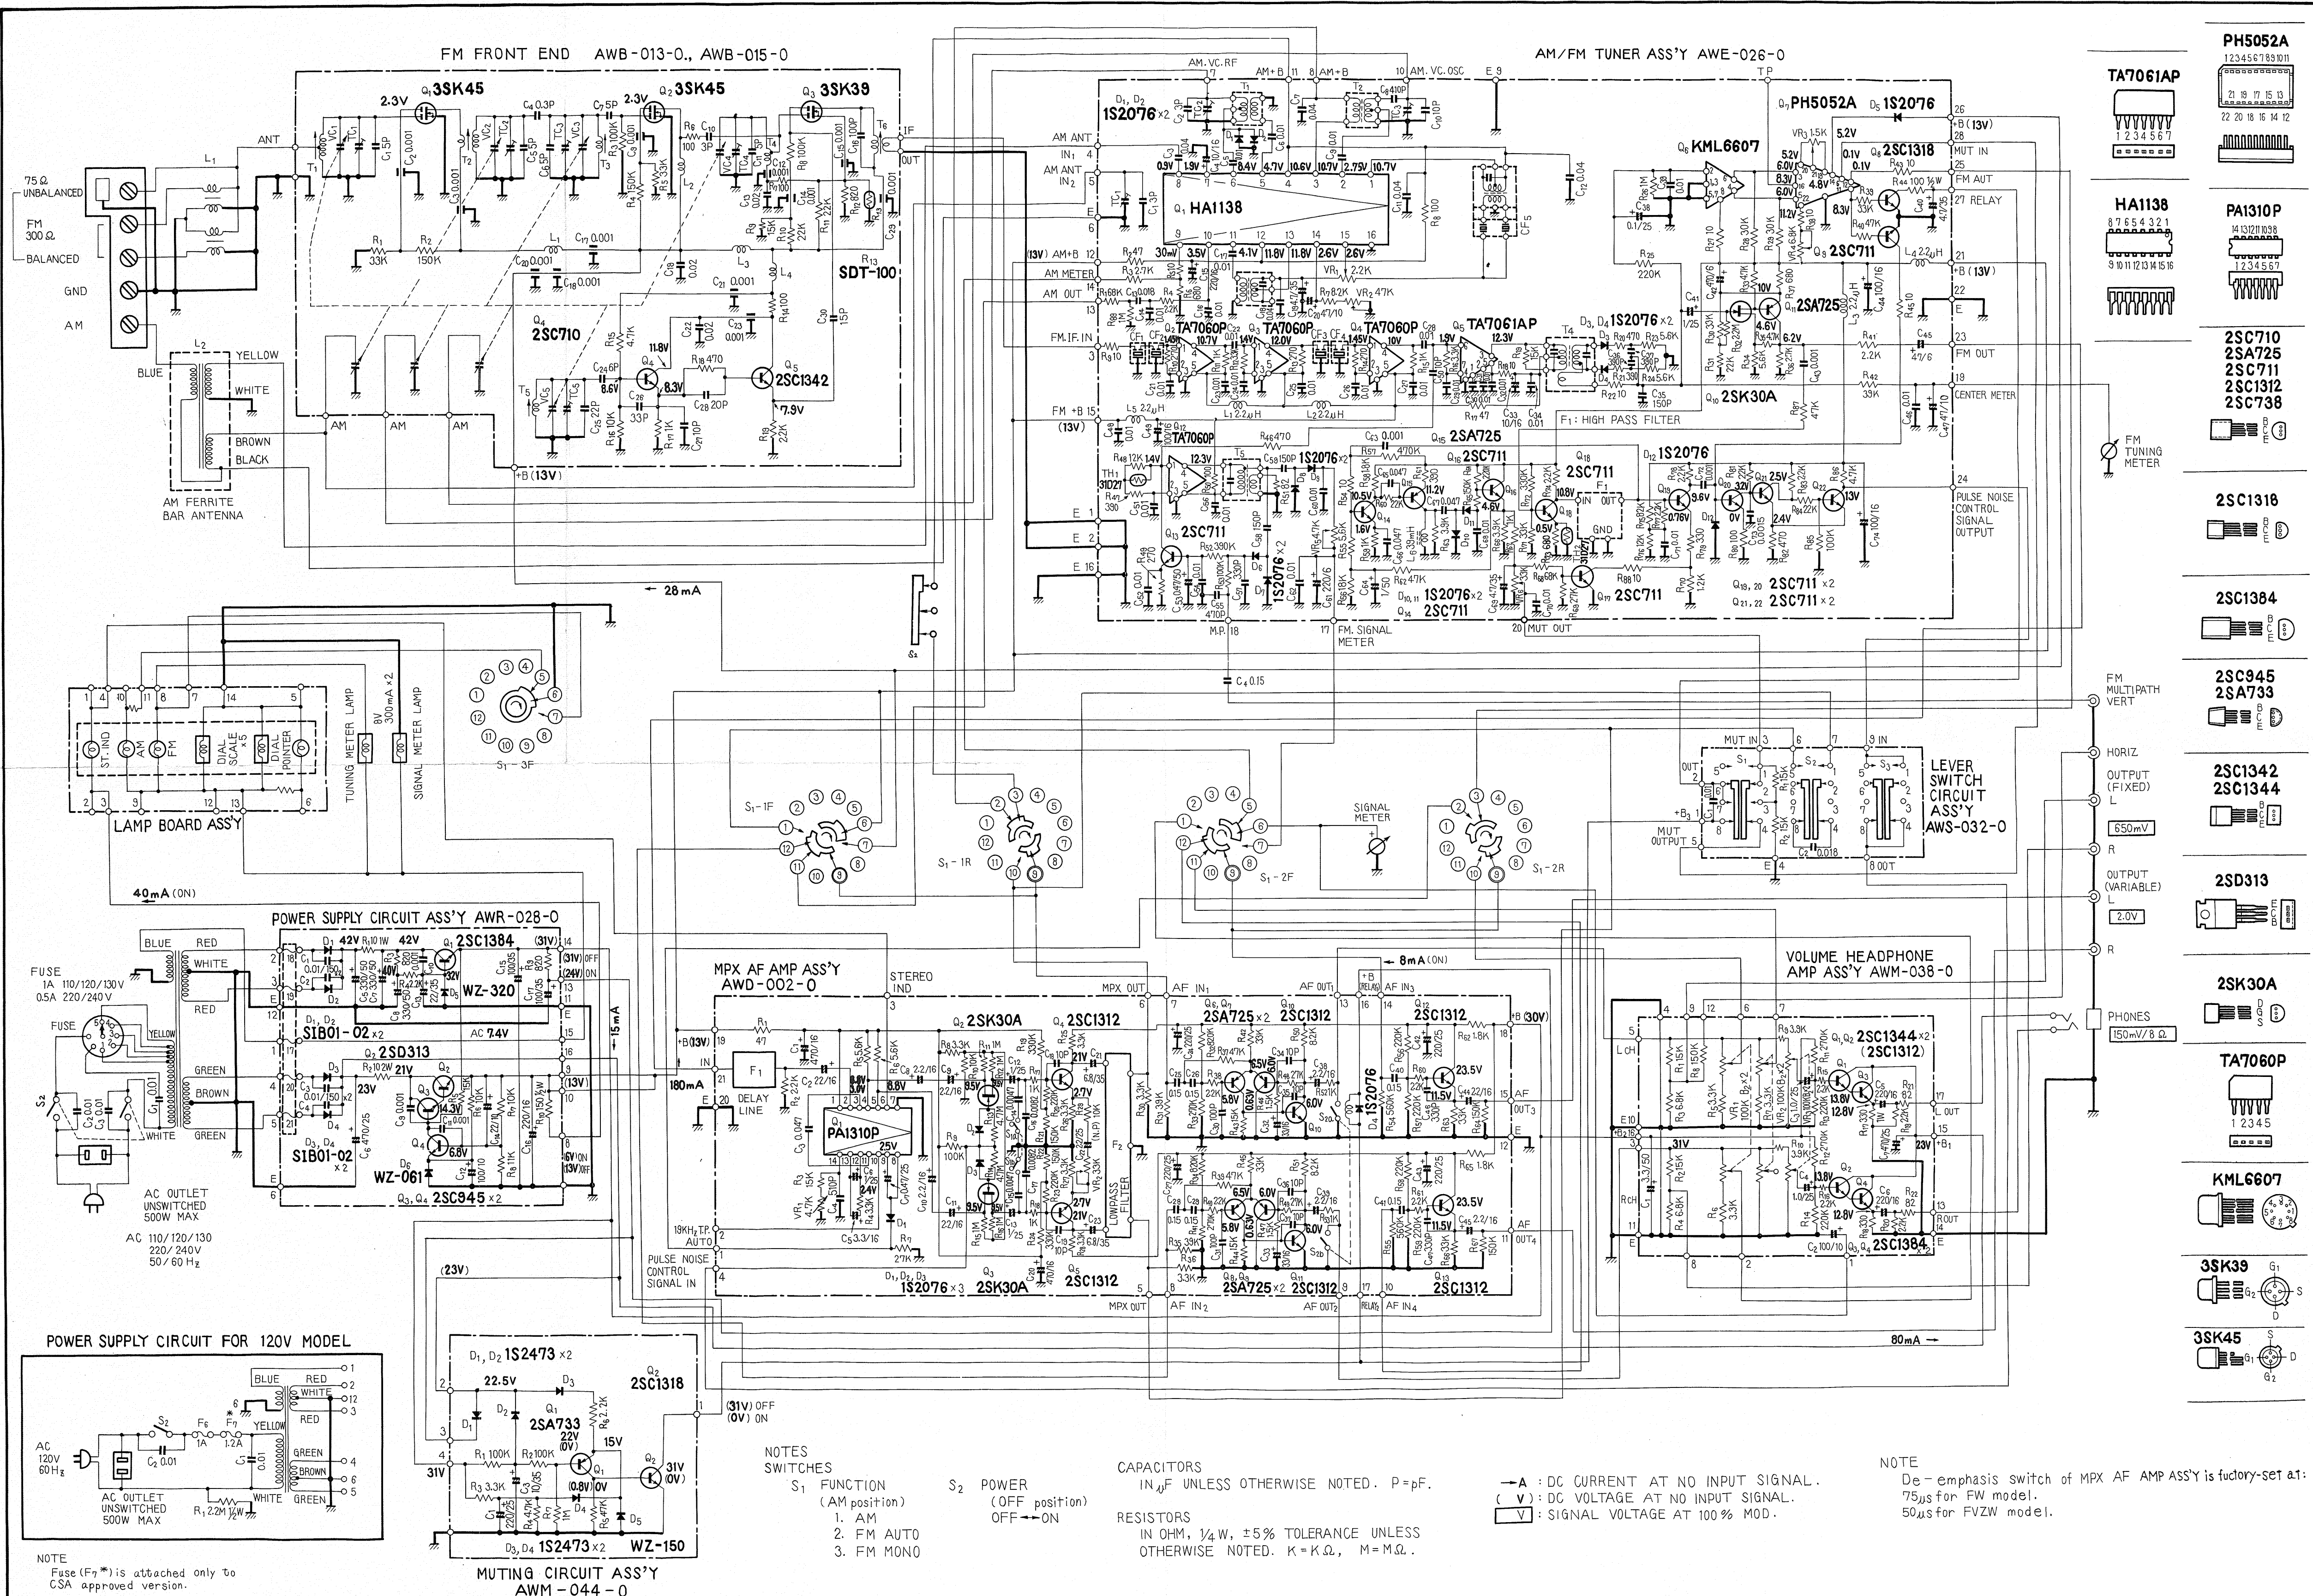


PH5052A




HA1138




PA1310P




2SC710




2SC1318




2SC1384




2SC945



2SK30A



TA7060P



KML6607



NOTE
Fuse (F7*) is attached only to CSA approved version.

- NOTES
- SWITCHES
- S₁ FUNCTION
(AM position)
1. AM
2. FM AUTO
3. FM MONO
- S₂ POWER
(OFF position)
OFF → ON

CAPACITORS
IN μ F UNLESS OTHERWISE NOTED. P=pF.

RESISTORS
IN OHM, $\frac{1}{4}$ W, $\pm 5\%$ TOLERANCE UNLESS OTHERWISE NOTED. K = K Ω , M = M Ω .

→ A : DC CURRENT AT NO INPUT SIGNAL.
(V) : DC VOLTAGE AT NO INPUT SIGNAL.
V : SIGNAL VOLTAGE AT 100% MOD.

NOTE
De-emphasis switch of MPX AF AMP ASS'Y is factory-set at: 75 μ s for FW model. 50 μ s for FVZW model.