



TX-D1000 S, S/G

SCHEMATIC DIAGRAM

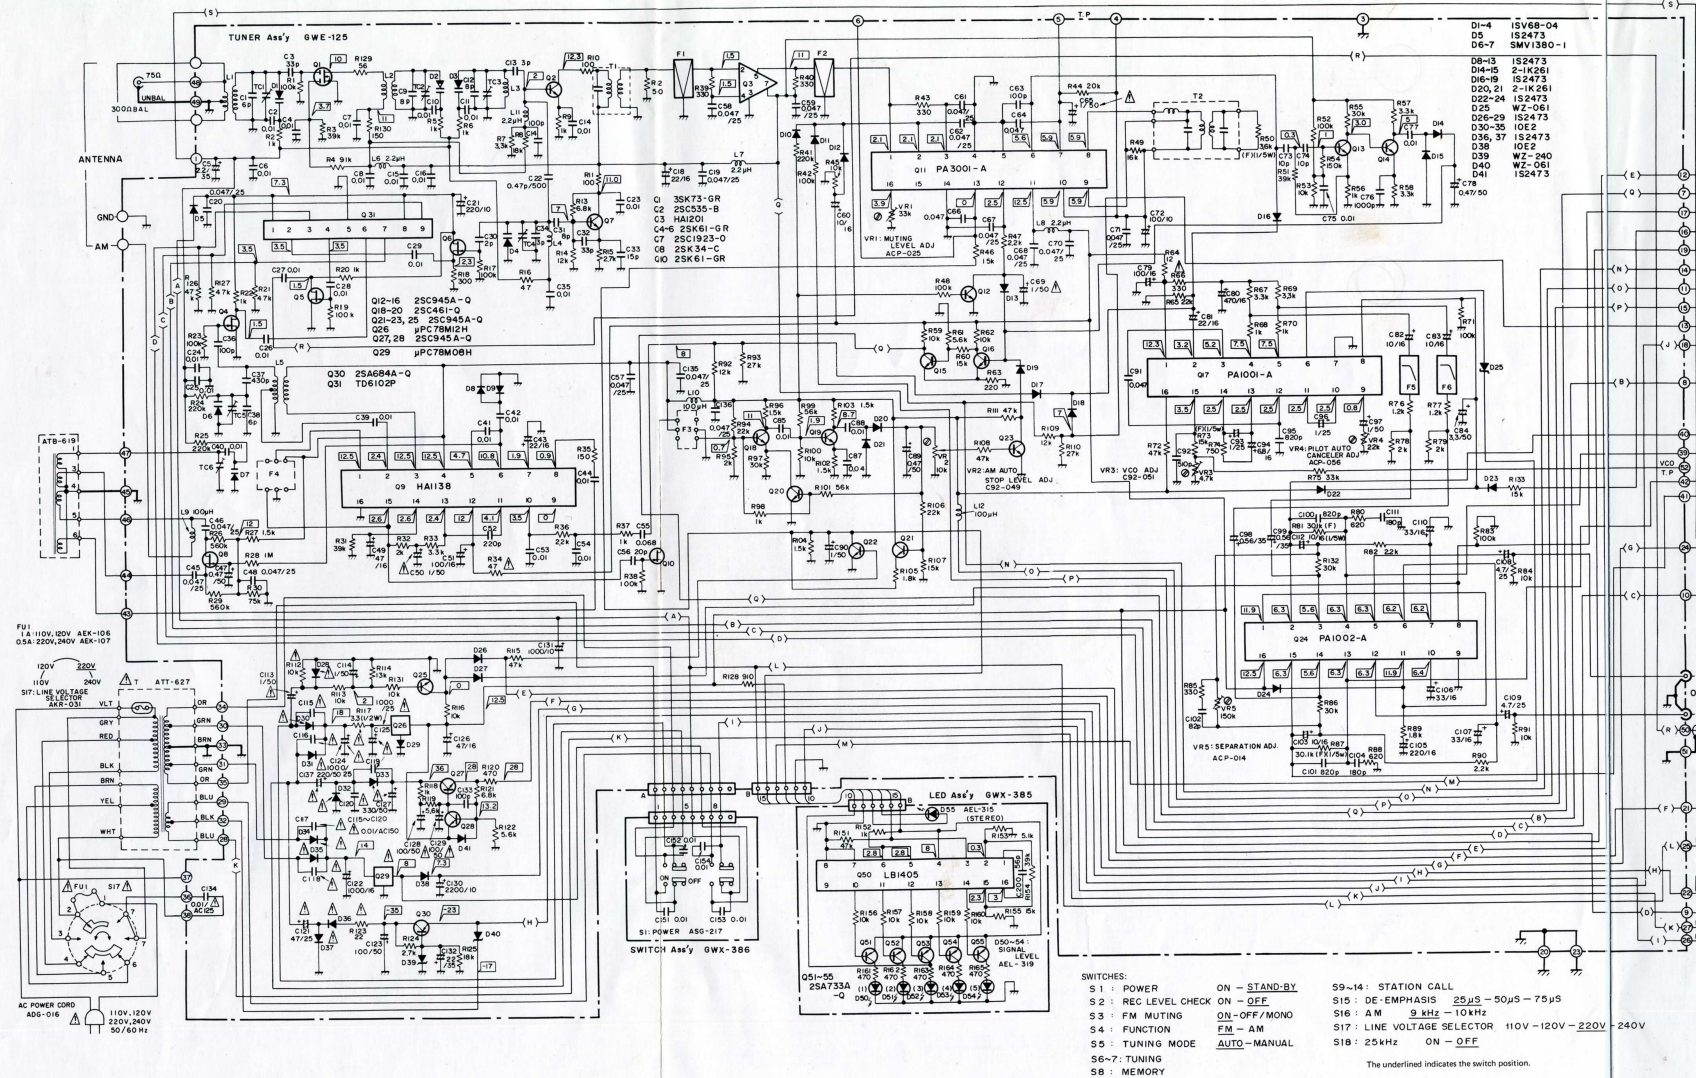

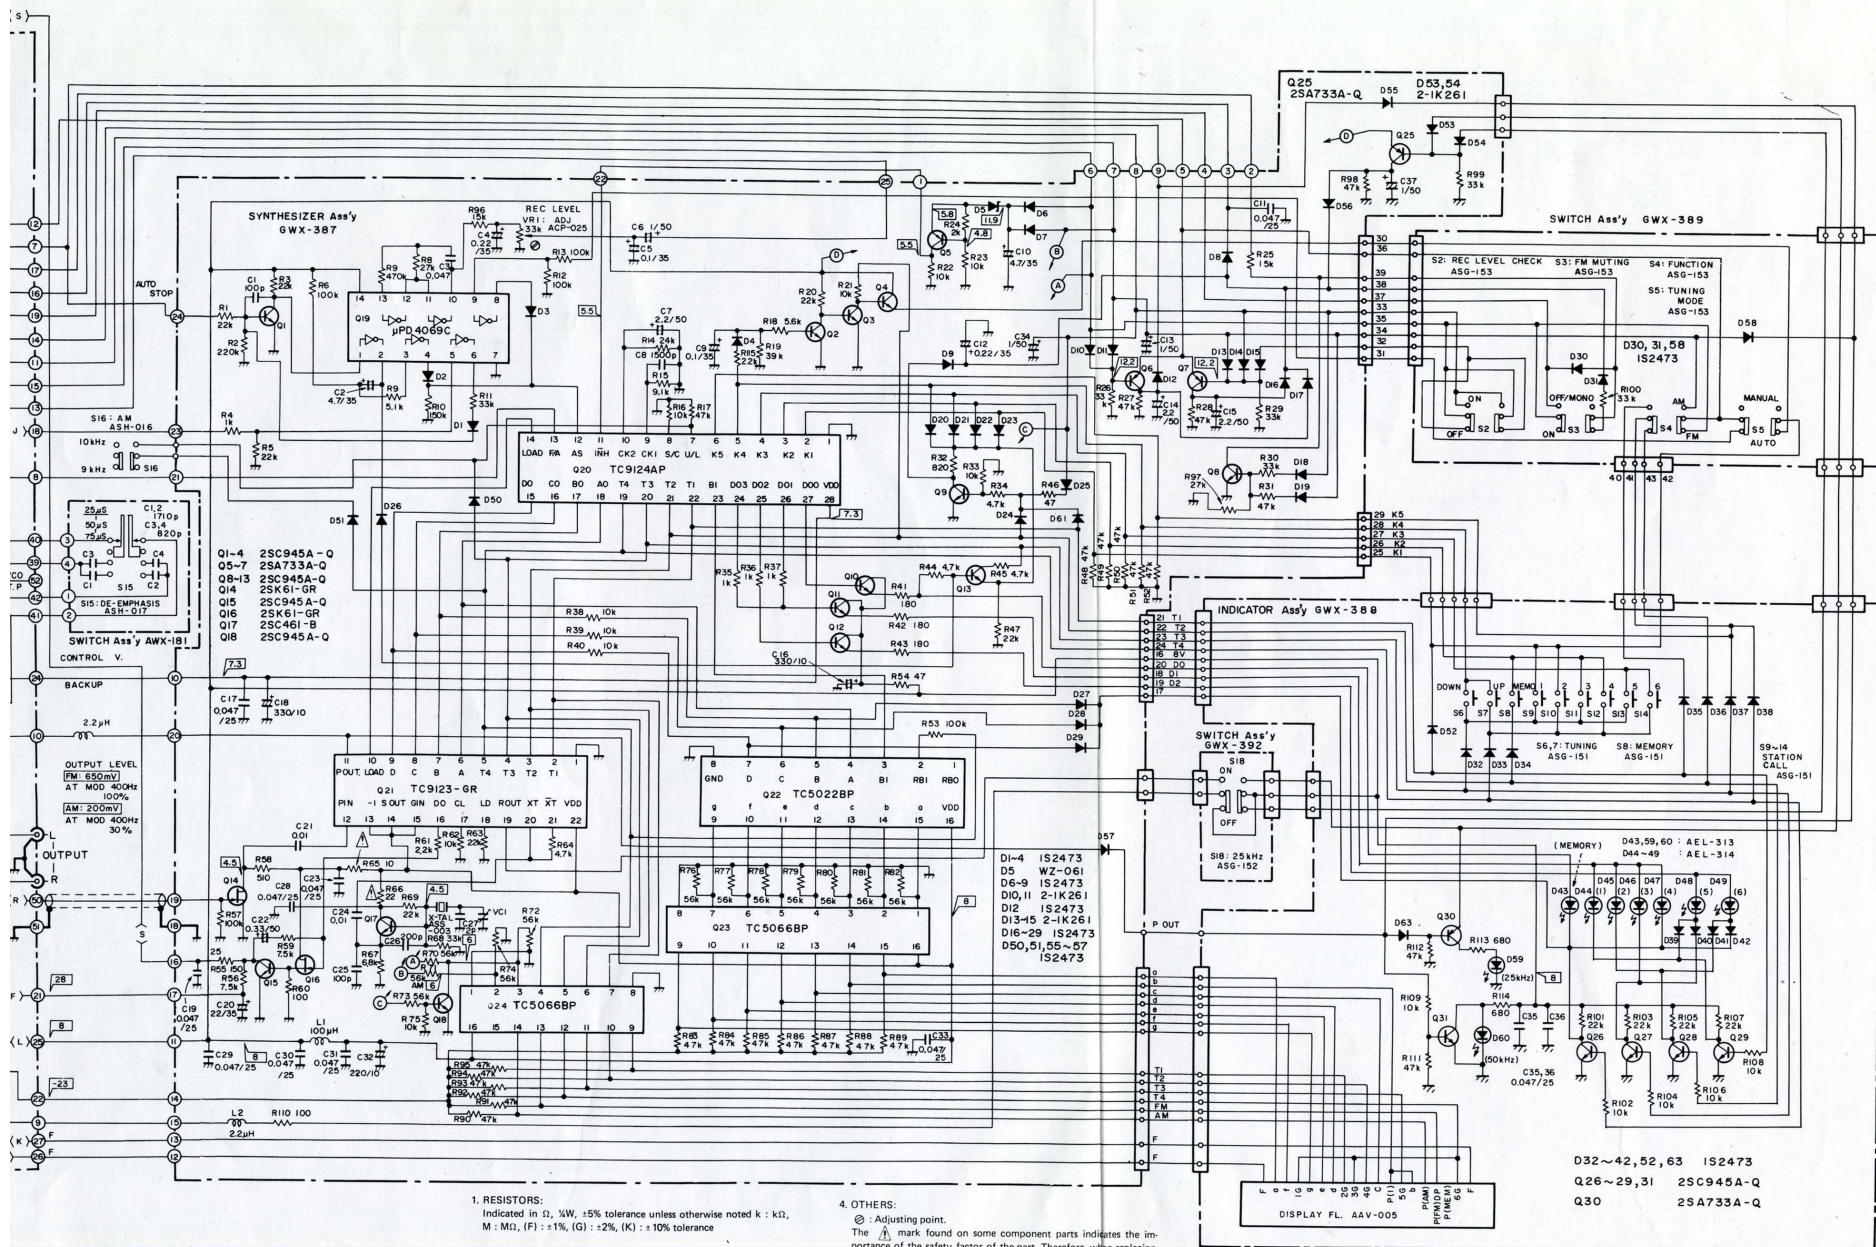

- RESISTORS:
Indicated in Ω , $\text{k}\Omega$, $\text{M}\Omega$, (F) $\pm 1\%$, (G) $\pm 2\%$, (K) $\pm 10\%$ tolerance
- CAPACITORS:
Indicated in capacity (uF)/voltage (V) unless otherwise noted p: pF
Indication without voltage is 50V except electrolytic capacitor.
- VOLTAGE:
DC voltage (V) at no input signal

- OTHERS:
⊗: Adjusting point.
The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

This is the basic schematic diagram, but the actual circuit may vary due to improvements in design.

D32~42, 52, 63 1S2473
Q26~29, 31 2SC945A-Q
Q30 2SA733A-Q