

The TimePiece™

Physical and Technical Data*

Dimensions:

16" h x 7³/₄" w x 7³/₄" d
40.64 cm x 19.7 cm x 19.7 cm

Weight:

12¹/₂ lbs. (5.67 kg) net
29 lbs. (13.15 kg) shipping weight
(2 loudspeakers per carton)

Sensitivity:

90 db/1 watt/1 meter

Recommended Amplifier Power:

10 to 80 watts

Maximum Power Handling:

15 watts RMS pink noise continuous
100 watts peak program

Impedance:

8 ohms nominal


Frequency Range:

60 to 20 KHZ

Enclosure Type:


Transmission Line
Resonance 48 Hz

Driver Complement:

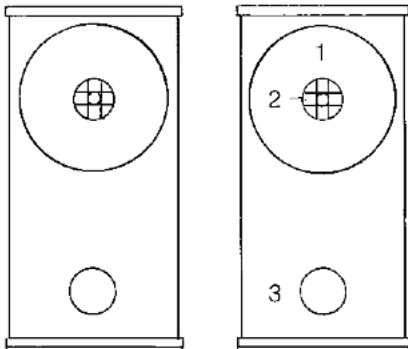

The diagram above shows the placement of:

1. 6.5" (16.5 cm) low frequency driver
2. .75" (1.9 cm) plastic dome tweeter
3. Tuned port

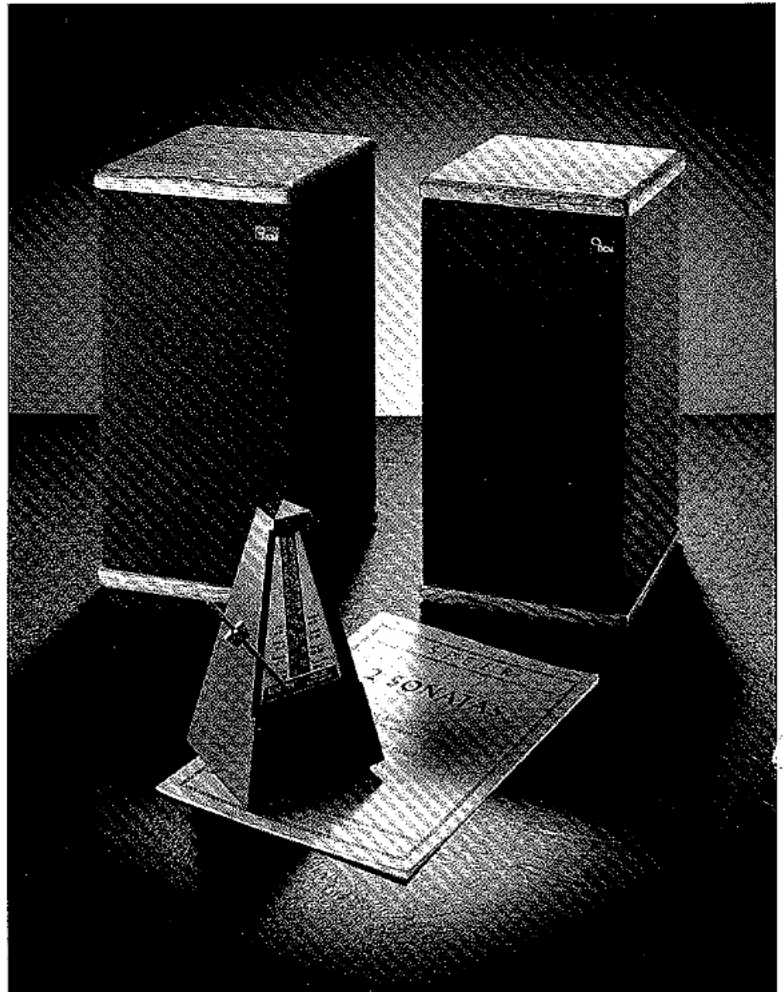

*DCM reserves the right to improve our specifications at anytime and without prior notice.

DCM Corporation

670 Airport Blvd. • Ann Arbor, Michigan 48108 U.S.A. • 313-994-8481 • FAX: 313-994-0190
The TimePiece™ Loudspeaker is made in the U.S.A. • U.S. and foreign patents issued or pending.
© 1988 DCM Corporation