SCHEMATIC DIAGRAM

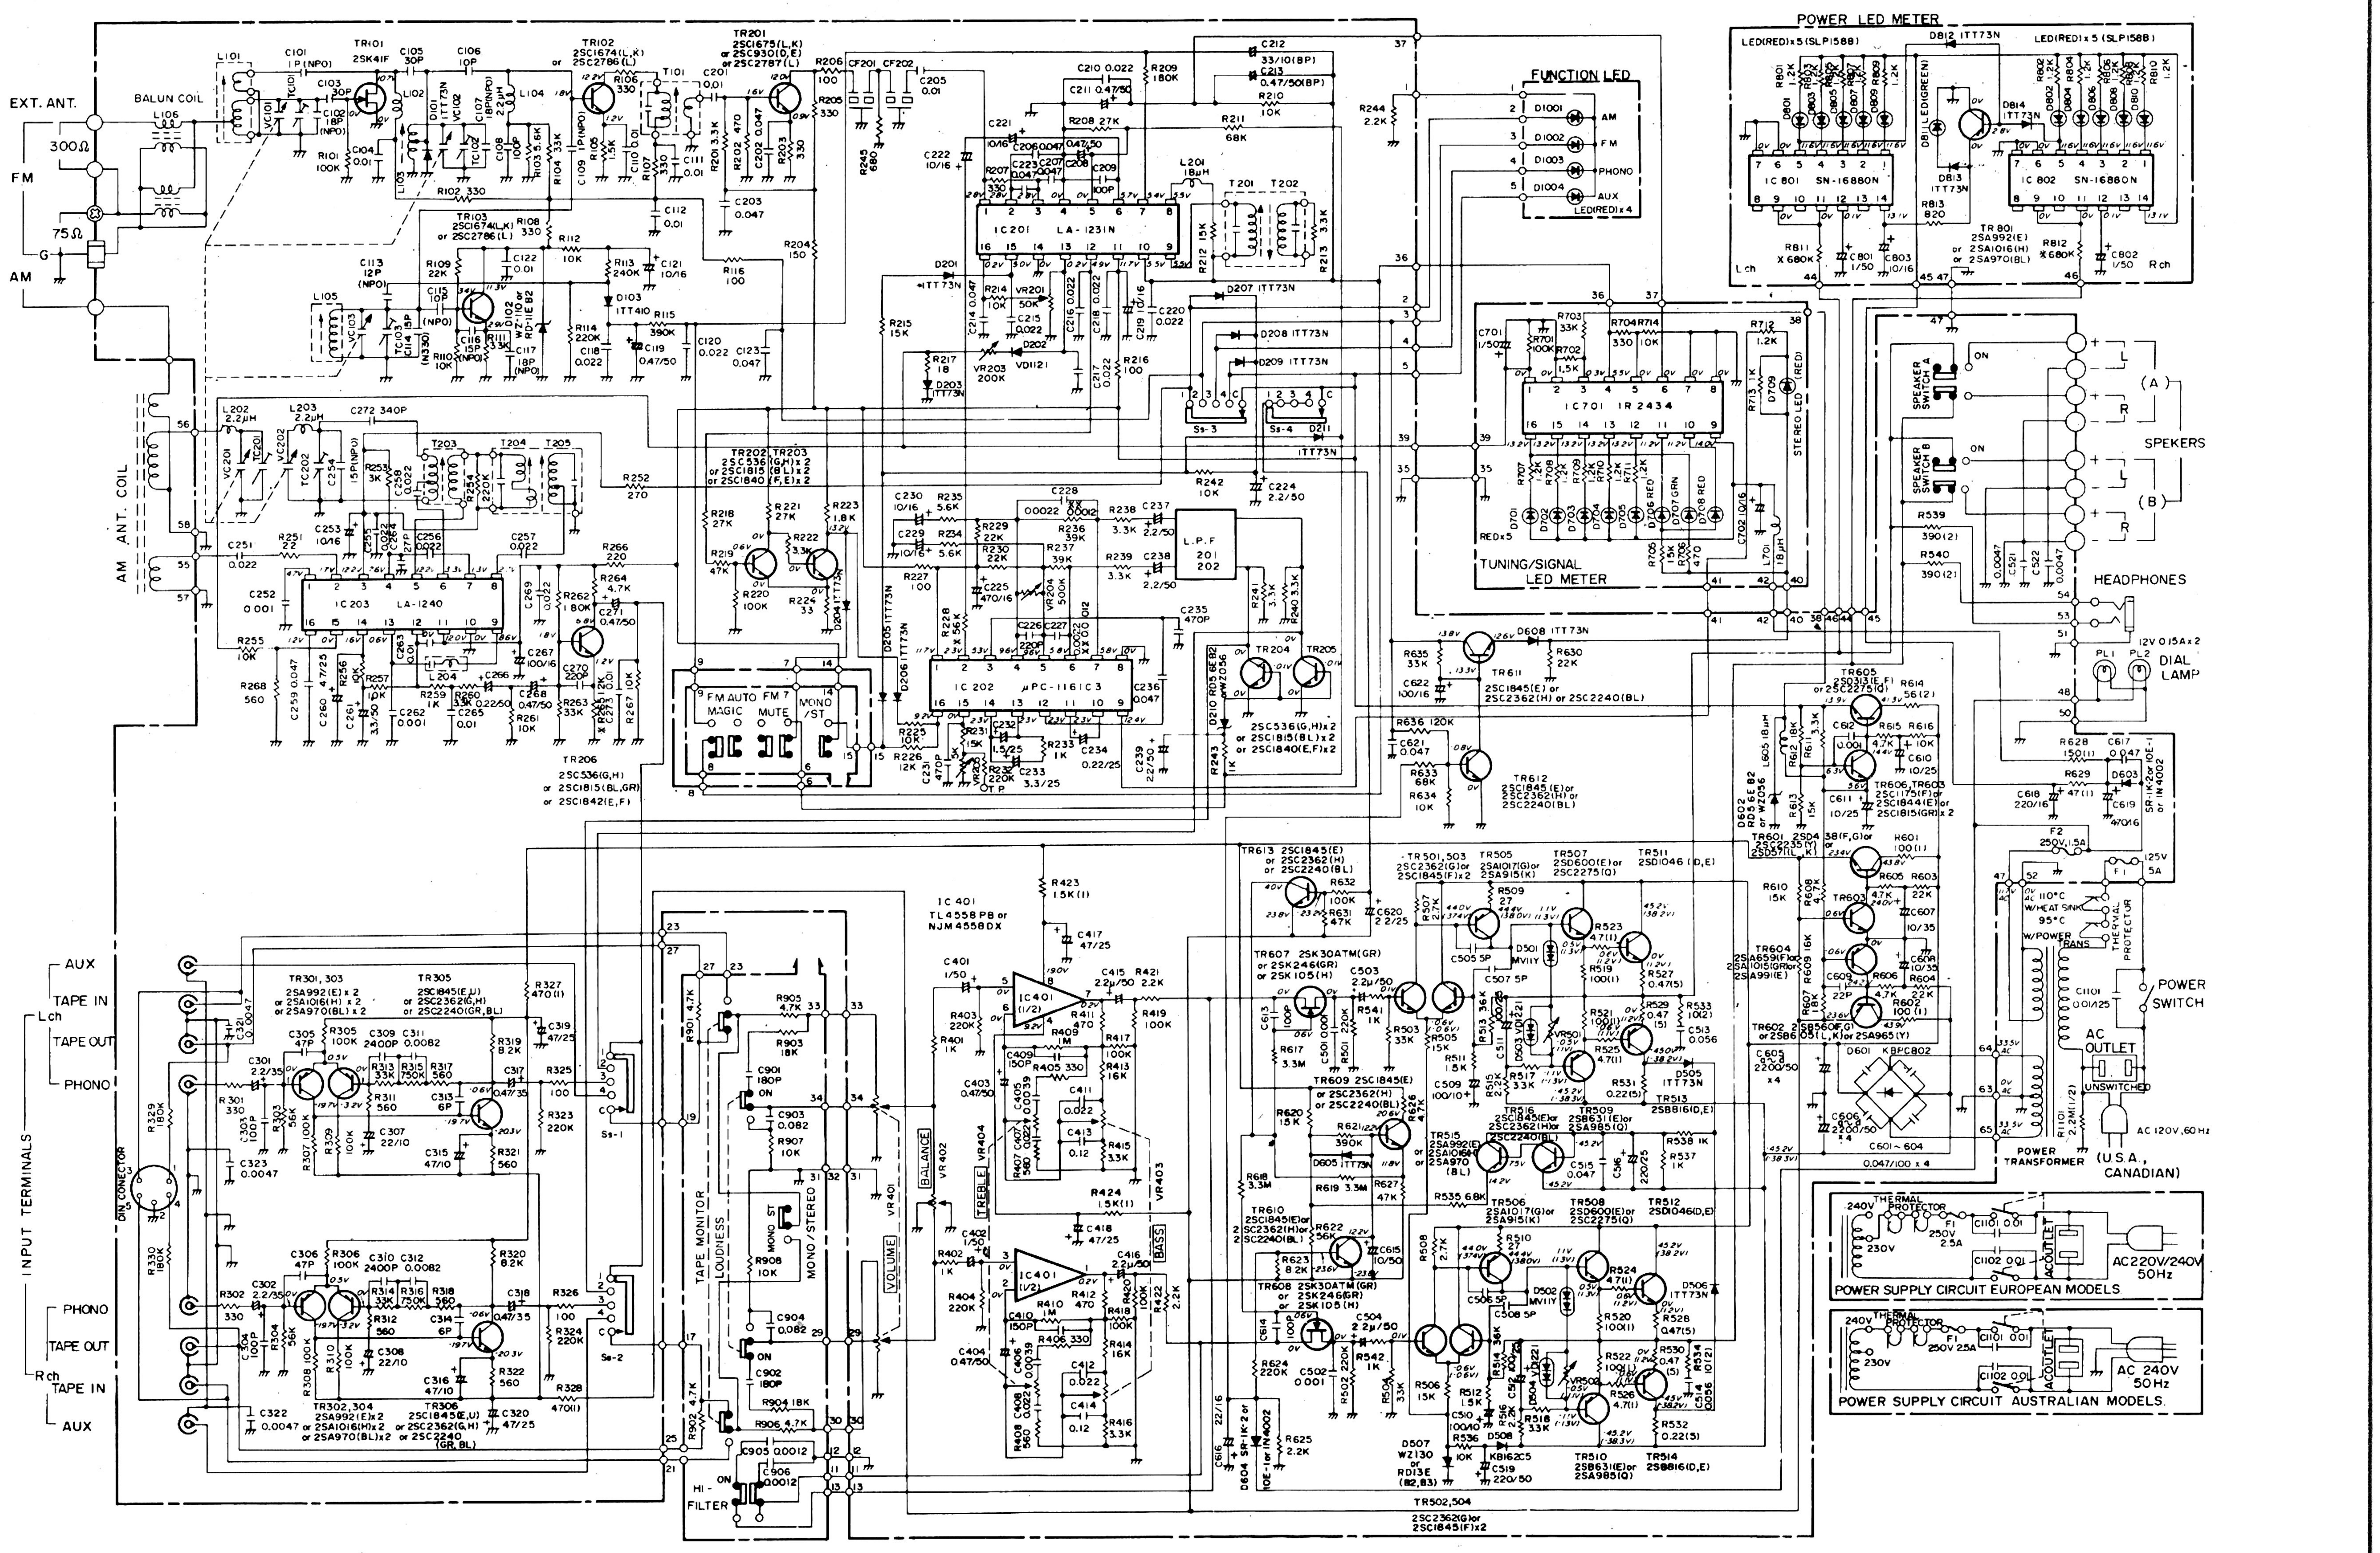

NOTE: 1) Ss-1～Ss-4 : FUNCTION SELECTOR SWITCH POSITION ; 1 - AM, 2 - FM, 3 - PHONO, 4 - AUX.

2) ALL RESISTANCE VALUES ARE INDICATED IN "OHM" (K = 10^3 OHM, M = 10^6 OHM).

3) ALL CAPACITANCE VALUES ARE INDICATED IN "μF" (P = 10^{-6} μF).

4) ※※ VALUES ARE USED FOR EUROPEAN MODELS ONLY.

5) ※ VALUES MAY VARY FROM UNIT TO UNIT FOR OPTIMUM PERFORMANCE.

REALISTIC®