
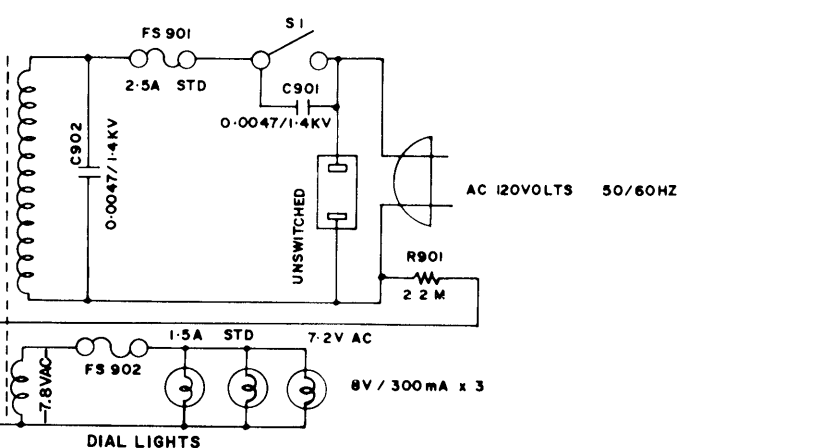


**SHERWOOD**  
**MODEL S-7250 CP**  
**FM-AM STEREO RECEIVER**  
 SERIAL NO. 725801000 & UP

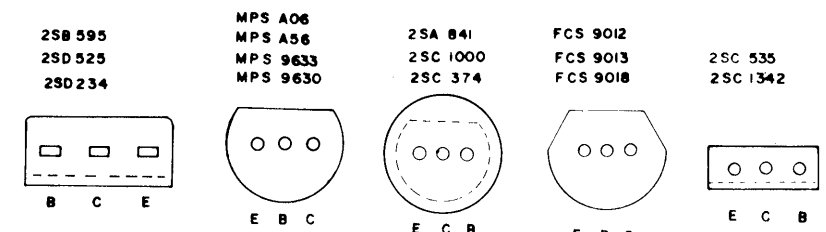

- Note: 1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise noted. (P=picofarads)
3. Component values are subject to change without notice.
4. MARKED \*'s are for adjustment.
5. All voltages are referenced to ground under the following conditions:
- [ ] : no signal except where indicated.
  - [ ] : 100µV FM stereo signal.
  - [ ] : AC (at 1 kHz, 90mV lead, or rated output).
  - [ ] : STEREO or MONO audio (rms) with antenna inputs below:
    - FM MONO—100µV, L=100% modulation at 400Hz.
    - FM STEREO—100µV Pilot 10%, L or R 90% modulation at 400Hz.
    - AM—500µV/m, 30% modulation.