



Schaltbild CT 2000

CANTON

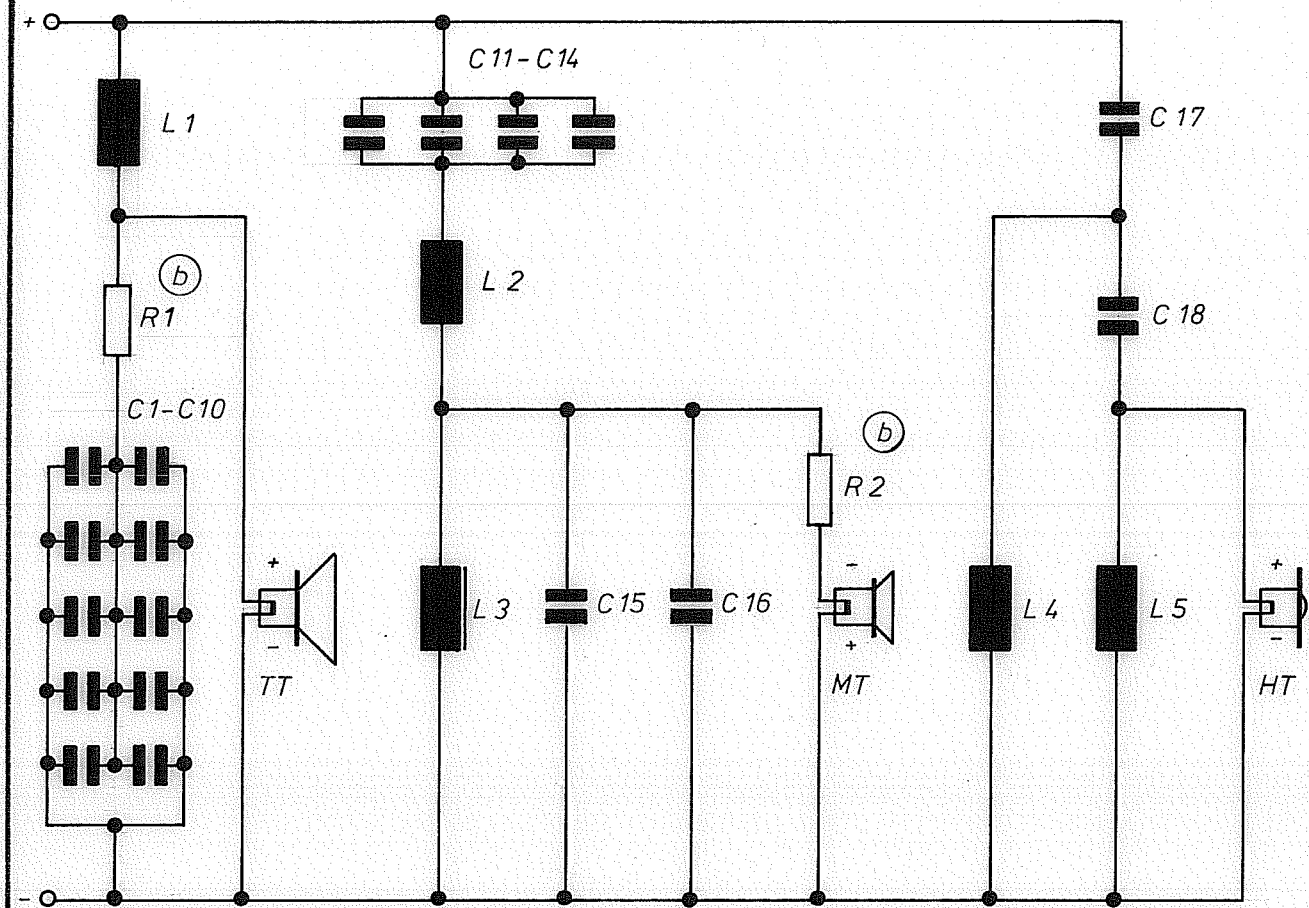


	Netzwerk			TT	MT	HT					
Benennung	CT 2000			TL 310	ML 120	T 25					
Mat.- Nr.	2242			2243	2244	1877 (b)					
Dämpfung	1x 900x600 Ident-Nr. 2325 1x 520x250 Ident-Nr. 2355		nach Vorschrift (4) A.612								
(c) (b)	3x 60 g Polyfaser Ident-Nr.1608										
Nr.	Index	Benennung	Mat. - Nr.	Nr.	Index	Benennung	Mat. - Nr.				
L1		Drossel 7-320-16	2 2 6 7	R1	b _c	Widerstand 1,5 Ohm, 9 W	2 3 5 8				
L2		Drossel 2-048-06	2 0 9 6	R2	b	Widerstand 2,7 Ohm, 9 W	2 3 5 2				
L3		Drossel FK 36-235-071	1 8 7 3								
L4	c	Drossel 1-014-06	2 6 0 4								
L5	a	Drossel 2-028-06	2 8 8 3								
C1-C15		Kondens. FO 10,0µF, 100V -	2 1 0 3								
C16		Kondens. FO 4,7µF, 100V	1 8 8 2								
C17		Kondens. FO 6,8µF, 100V	2 1 0 2								
C18		Kondens. FO 6,8µF, 100V	2 1 0 2								
Nr.	Änd-Nr.	Tag	Name	Nr.	Änd-Nr.	Tag	Name	1983	Tag	Name	(4) 261
a	102/83	25.10.	Wanders	c	125/83	14.12.	gepr.	gepr.	19.10.	gepr.	
b	119/83	1.12.	Wanders								

(4) 261

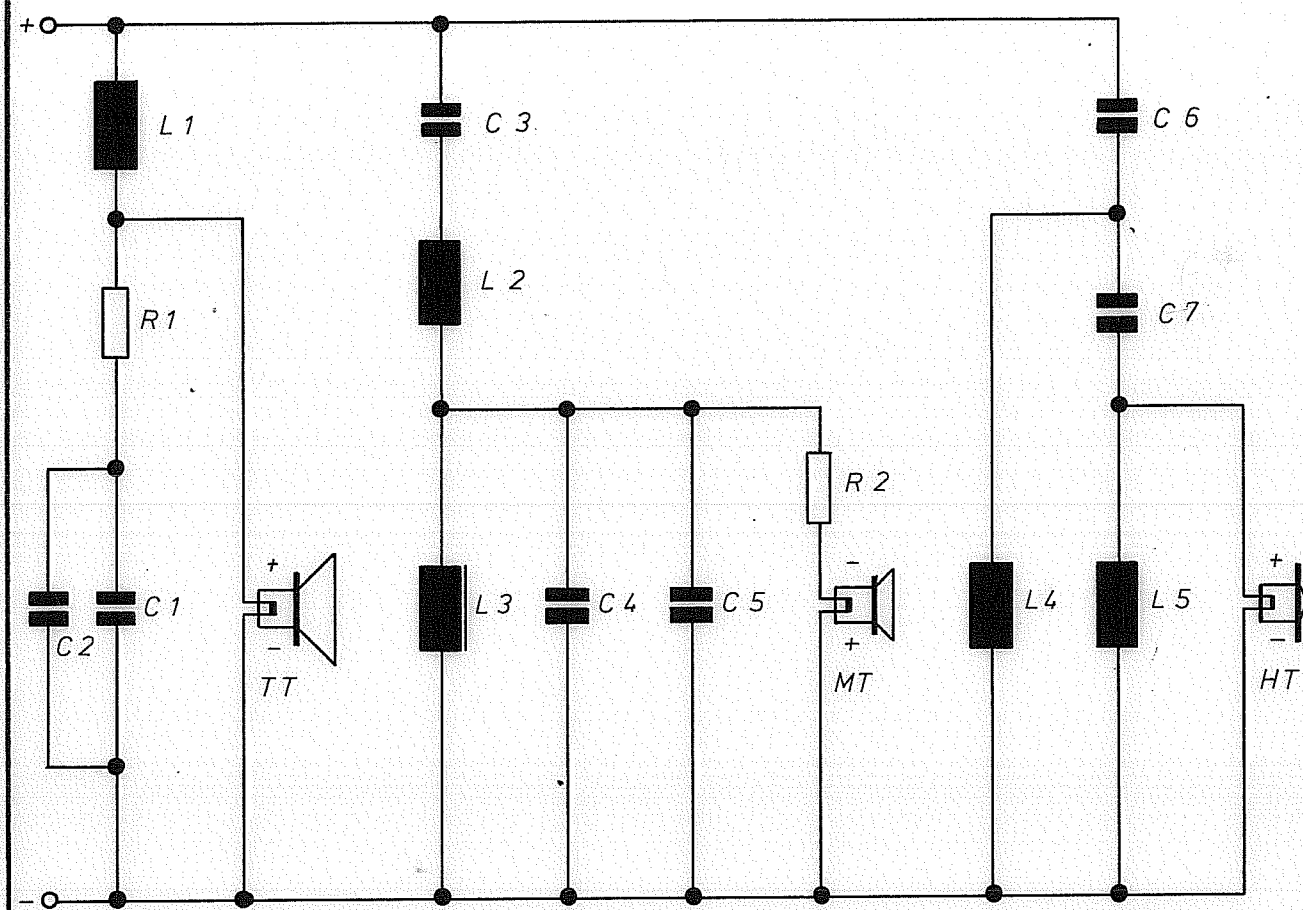

Netzwerk			TT			MT			HT		
Benennung			CT 200011			TL 310			ML 120		
Mat.-Nr.			2407			2243			2244		
Dämpfung			1 x 900 x 600 Ident.-Nr. 2325			nach Vorschrift (4) A.633					
			1 x 520 x 250 Ident.-Nr. 2355								
(a)			3 x 60 g Polyfaser Ident.-Nr. 1608								
Nr.	Index	Benennung	Mat.-Nr.			Nr.	Index	Benennung	Mat.-Nr.		
L1		Drossel 7-320-16	2	2	6 7	C6		Kondens.FO 6,8µF, 100 V	2	1	0 2
L2		Drossel 2-048-06	2	0	9 6	C7		Kondens.FO 6,8µF, 100 V	2	1	0 2
L3		Drossel FK 36-235-071	1	8	7 3						
L4		Drossel 1-014-06	2	6	0 4	R1		Widerstand 2,2 Ohm, 9 W	1	6	1 9
L5		Drossel 2-016-06	1	1	8 1	R2		Widerstand 2,2 Ohm, 9 W	1	6	1 9
C1		Kondens.FO 100µF, 100 V	2	3	9 0						
C2		Kondens.FO 68µF, 100 V	2	3	9 1						
C3		Kondens.FO 47µF, 100 V	2	3	9 3						
C4		Kondens.FO 10µF, 100 V	2	1	0 3						
C5		Kondens.FO 4,7µF, 100 V	1	8	8 2						
Nr.	Änd.-Nr.	Tag	Name	Nr.	Änd.-Nr.	Tag	Name	1984	Tag	Name	(4) 264
a	21184	9. 3.	gez.					gez.	26.1.	gez.	
			gepr.					gepr.			

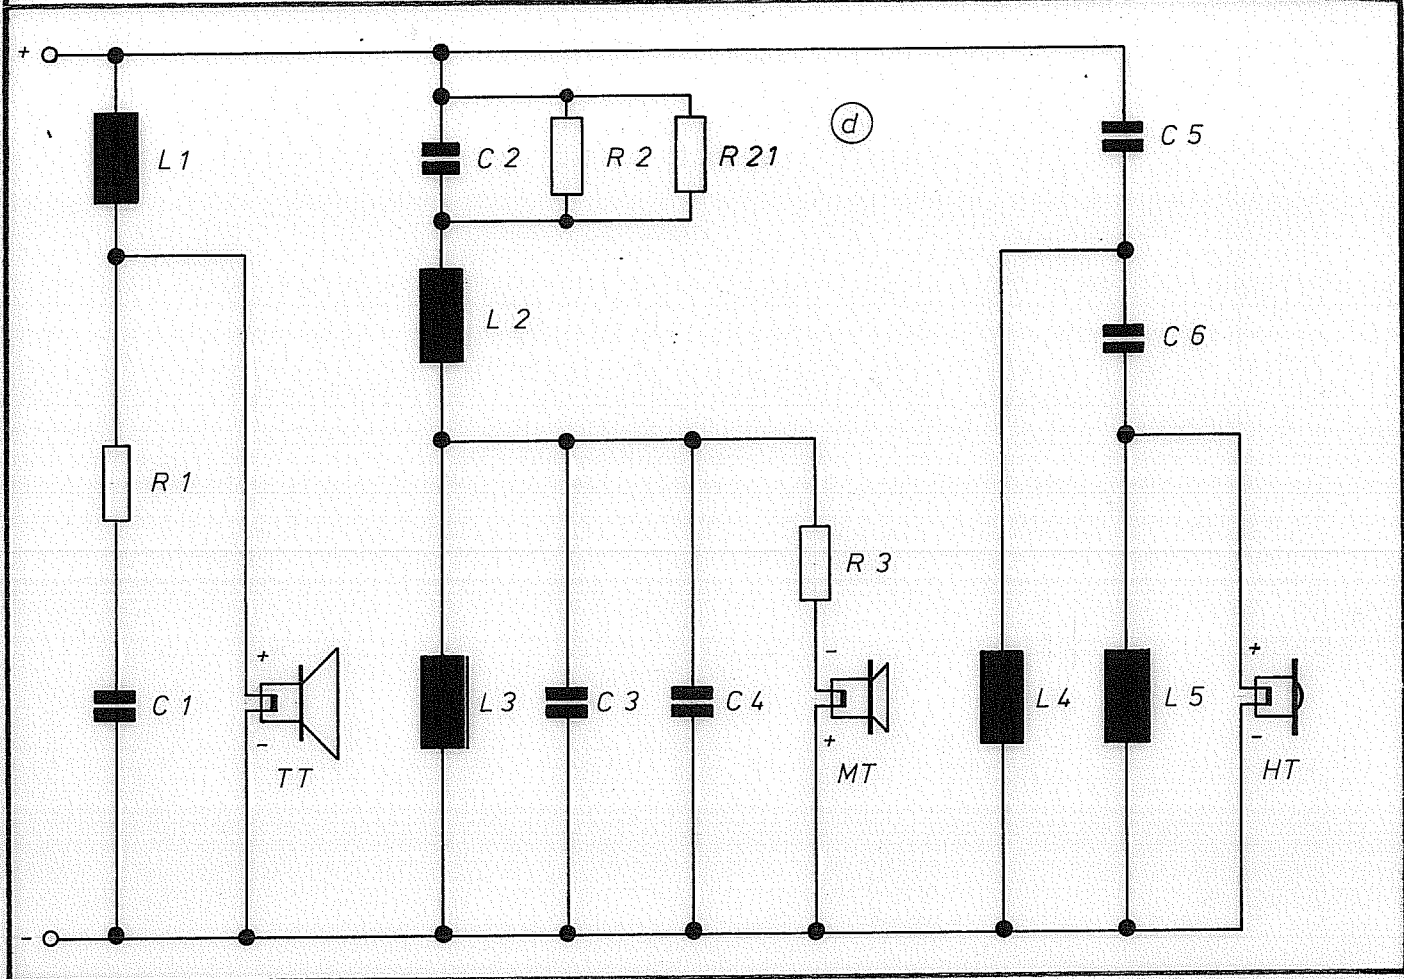


	Netzwerk			TT	MT	HT
Benennung	CT 2000 1 2			TL 310	ML 120	T 25
Mat.- Nr.	2 6 5 5			2740	2 2 4 4	1877
Dämpfung	1 x 900 x 600 Ident.Nr. 2325		nach Vorschrift (4) A.633			
	5 x 520 x 250 Ident.Nr. 2355					
(b)	3 x 60 g Polyfaser Ident.Nr. 1608					

Nr.	Index	Benennung	Mat. - Nr.	Nr.	Index	Benennung	Mat. - Nr.
L1		Drossel 7-320-16	2 2 6 7	C5	c	Kondens.EL6,8 μ F, 60VAC,100V-	2 1 0 2
L2		Drossel 2-048-06	2 0 9 6			AD-FG bipolar (Audio-Frequ.)	
L3		Drossel FK 36-235-071	1 8 7 3	C6	c	Kondens.EL6,8 μ F 60VAC 100V-	2 1 0 2
L4		Drossel 1-014-06	2 6 0 4			AD-FG bipolar (Audio-Frequ.)	
L5		Drossel 2-016-06	1 1 8 1				
				R1		Widerstand 2,70hm , 9 W	2 3 5 2
C1		Kondens. FO 100 μ F, 100 V	2 3 9 0	R2	a/d	Widerstand 47 Ohm, 9 W	1 6 1 8
C2		Kondens. FO 47 μ F, 100 V	2 3 9 3	R21	d	Widerstand 47 Ohm, 9 W	1 6 1 8
C3	c	Kondens.EL10 μ F, 60VAC,100V-	2 1 0 3	R3		Widerstand 1,8 Ohm, 9 W	2 5 0 3
		AD-FG bipolar (Audio-Frequ.)					
C4	c	Kondens. EL 4,7 μ F, 60VAC,100V-	1 8 8 2				
		AD-FG bipolar (Audio-Frequ.)					

Nr.	Änd-Nr.	Tag	Name	Nr.	Änd-Nr.	Tag	Name	1984	Tag	Name
a	80184	9.7.	Wendler	c	127184	2.10.	Wendler	gez.	23.3.	Gün
b	89184	15.8.	Wendler	d	128184	3.10.	Wendler	gepr.		

(4) 270

(4) 270

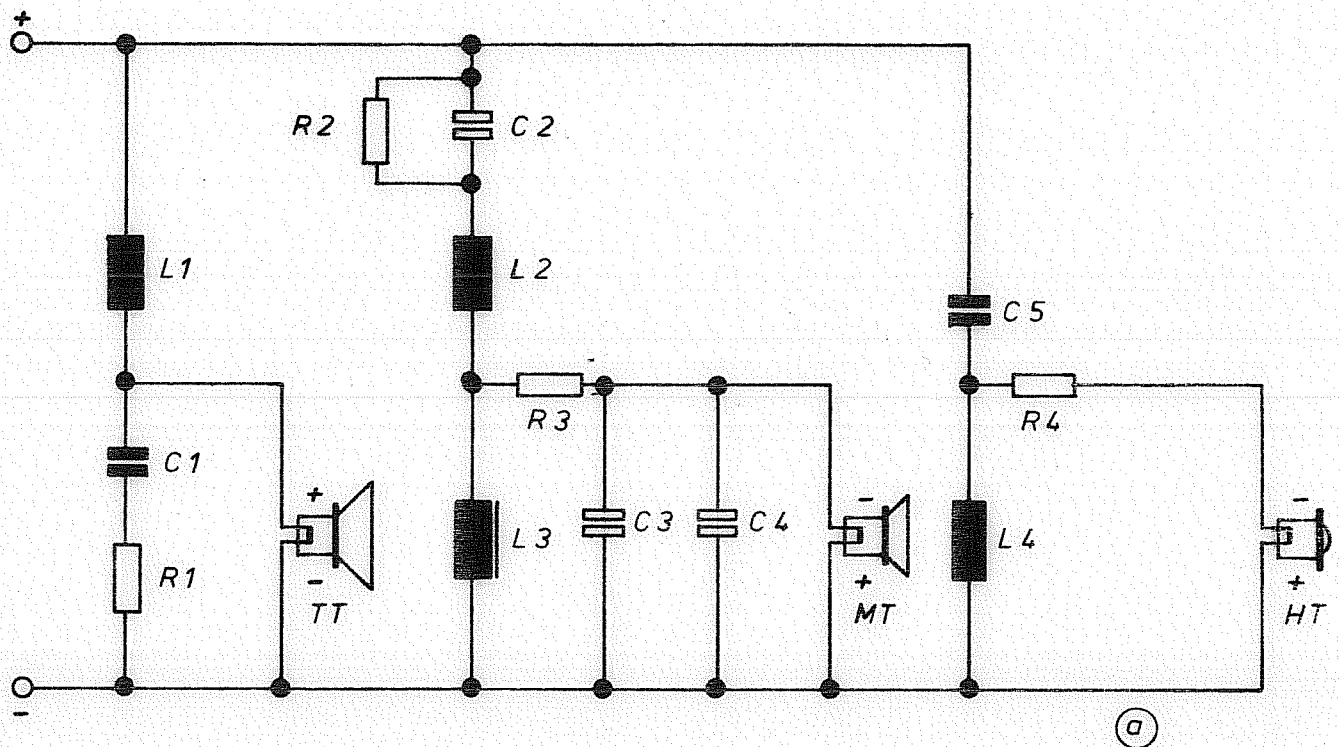


	Netzwerk			TT	MT	HT
Benennung	CT 2000 13			TL 310 150	ML 120	T 25
Ident. Nr.	4021			2740	2244	2512
Dämpfung	1x 900 x 600	Ident-Nr.	2325			
	5x 520 x 250	Ident-Nr.	2355			
	3x 60 gr. Polyfaser	Ident-Nr.	1608			

Nr.	Index	Benennung	Ident. Nr.	Nr.	Index	Benennung	Ident. Nr.
L1		Drossel 6-327-13	2 7 9 9	R1		Widerstand 2,7 Ohm , 9W	2 3 5 2
L2	a	Drossel 2-040-06	2 8 0 5	R2	a	Widerstand 47 Ohm , 9W	1 6 1 8
L3		Drossel FK 36-235-071	1 8 7 3	R3	a	Widerstand 1,2 Ohm , 9W	1 6 1 7
L4	a	Drossel FK 26-026-071	3 6 8 9	R4	a	Widerstand 0,27 Ohm, 4W	2 8 5 5
C1		Kond. Fo 100 µF 100 V	2 3 9 0				
C2		Kond EL 47 µF 25/23 VAC	2 8 0 1				
C3		Kond EL 10 µF 60 VAC	2 1 0 3				
C4		Kond EL 4,7µF 60 VAC	1 8 8 2				
C5		Kond Fo 4,7 µF 100 V	2 8 5 6				

Nr.	Änd-Nr.	Tag	Name	Nr.	Änd-Nr.	Tag	Name	1985	Tag	Name
a	93185	26.8.	Wadley					gez	22.5.	Wadley
								gepr		

(4) 293

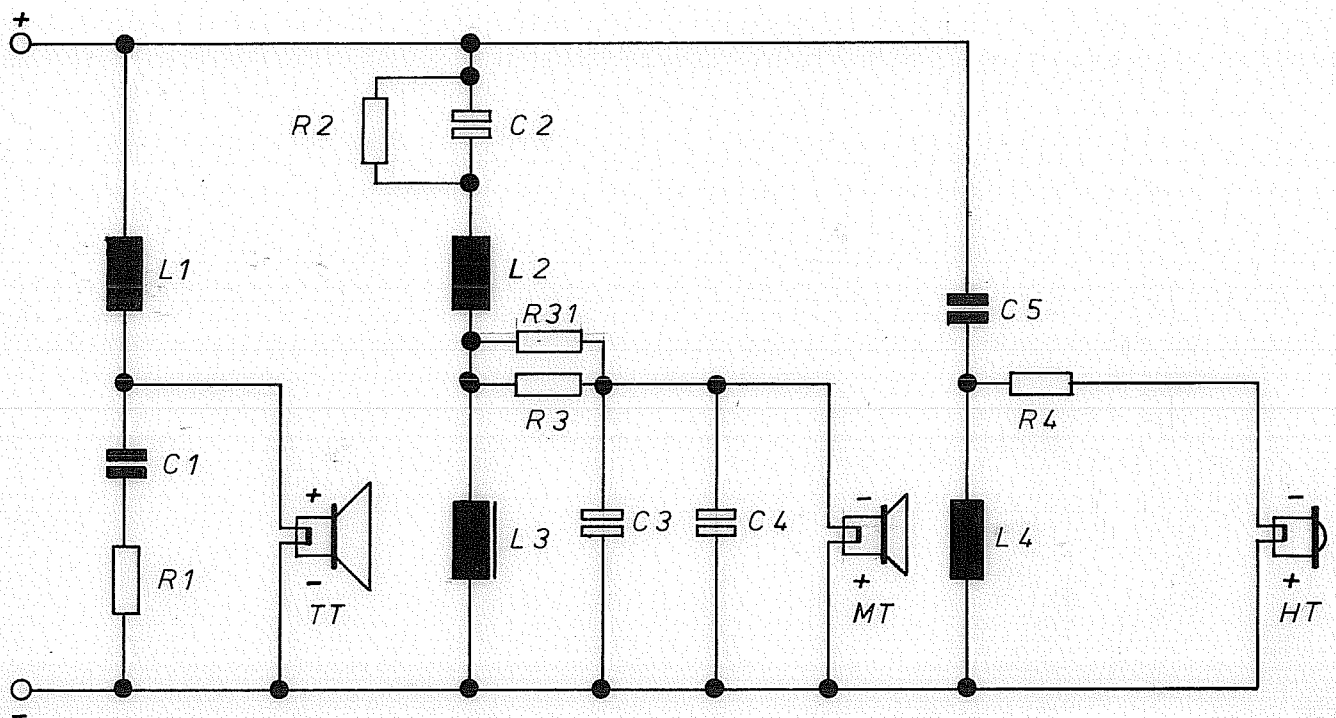

	Netzwerk			TT	MT	HT
Benennung	CT 2000 14			TL 310150	ML 120	T 25
Ident. Nr.	4 5 6 7			4 5 6 1	2244	2512
Dämpfung	8x 320x 320		Ident-Nr. 4384			
	1x 30 gr.Polyfaser		Ident-Nr. 2349			

Nr.	Index	Benennung	Ident. Nr.	Nr.	Index	Benennung	Ident. Nr.
L1		Drossel 6-327-13	2 7 9 9	R1		Widerstand 2,7 Ohm , 9 W	2 3 5 2
L2		Drossel 2-040-06	2 8 0 5	R2		Widerstand 47 Ohm , 9 W	1 6 1 8
L3		Drossel FK 36-235-071	1 8 7 3	R3		Widerstand 1,8 Ohm , 4 W	3 0 9 3
L4		Drossel FK 26-026-071	3 6 8 9	R4		Widerstand 0,27 Ohm, 4 W	2 8 5 5
				R31		Widerstand 1,8 Ohm , 4 W	3 0 9 3
C1		Kond. Fo 100 µF 100 V	2 3 9 0				
C2		Kond EL 47 µF 25123 VAC	2 8 0 1				
C3		Kond EL 10 µF 60 VAC	2 1 0 3				
C4		Kond EL 4,7µF 60 VAC	1 8 8 2				
C5		Kond Fo 4,7 µF 100 V	2 8 5 6				

Nr.	Änd-Nr.	Tag	Name	Nr.	Änd-Nr.	Tag	Name	1986	Tag	Name
								gez.	25.2.	Wendler
								gepr.		

(4) 298

(4) 298